



A

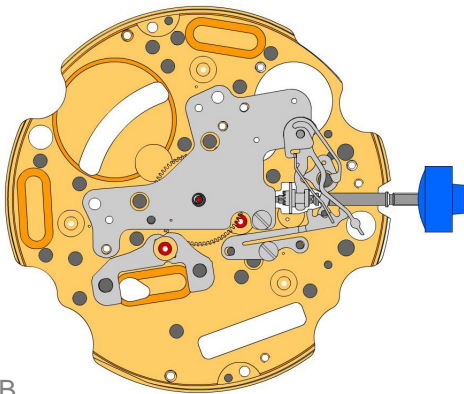


B

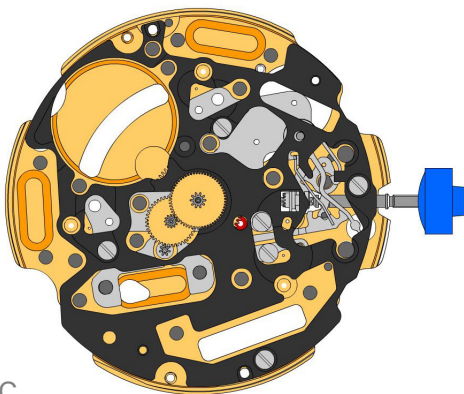


C

2000.577.G 1.		Main plate
3305.315.CO 2.		Cannon pinion with driver (Aig.0, closed)
2030.017.CO 3.		Centre bridge Centre bridge held by 1 screw 4000.250. Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together.
4000.250 4.		Screw
3001.055.FI 5.		Sliding pinion
3000.177.CO 6.		Setting stem
3017.049 7.		Setting lever
3905.049 8.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 9.		Screw
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3622.039 12.		Stator (counter 6h, 9h, chrono)
3603.079 13.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
4000.250 14.		Screw
3715.094.RK 15.		Rotor
3147.047.CO 16.		Intermediate wheel (chrono)
3136.170.CO 17.		Center second wheel (short)

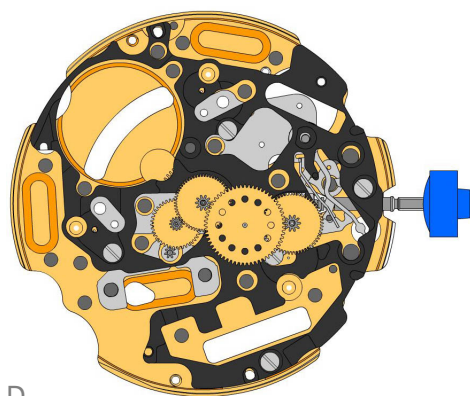

**D**


3136.148.CO  
18.  Second wheel (short)

3122.056.CO  
19.  Third wheel

2020.164.G  
20.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.

4000.250  
21.  Screw

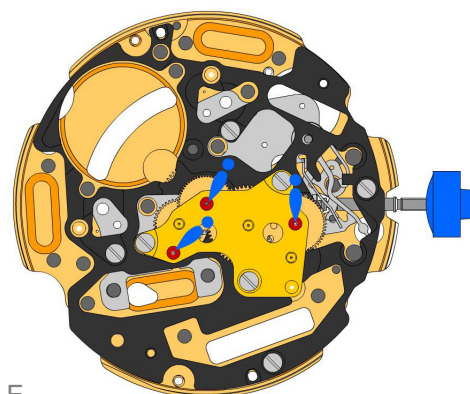
**E**

3621.079.RK  
22.  Coil (center)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250  
23.  Screw

3603.034  
24.  Battery insulator


3503.071  
25.  Tube


3601.118  
26.  Contact strip  
Contact strip held by 1 screw 4000.250.


4000.250  
27.  Screw

3503.059  
28.  Tube

3503.068  
29.  Tube

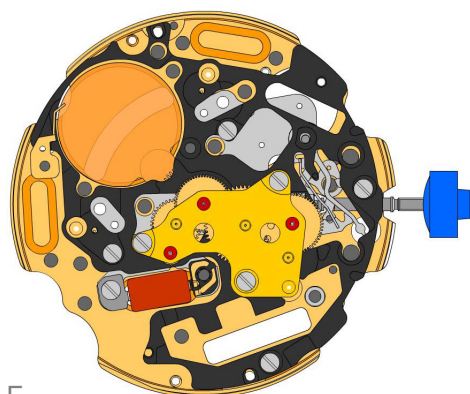
**F**

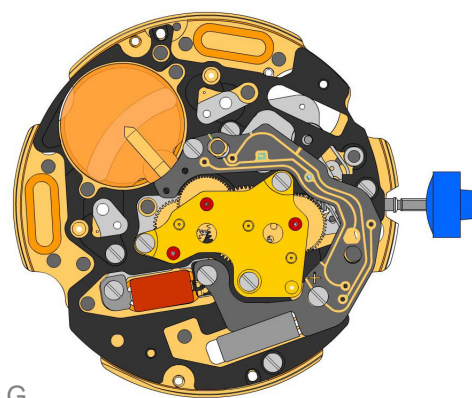

**G**

3612.147.4003  
30.  **Electronic module**  
Electronic module held by 1 screw 4000.248. Electronic measurements may be realised now.

4000.248  
31.  **Screw**

3603.069  
32.  **Circuit insulator**

3601.107.G  
33.  **Pusher contact spring**

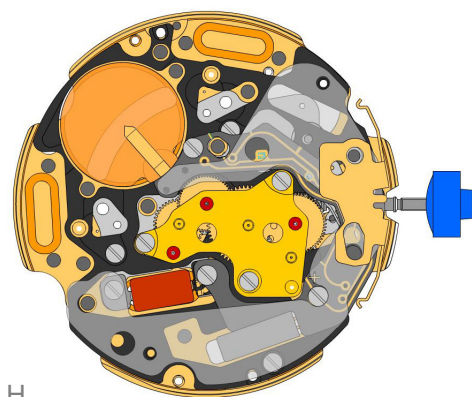

**H**



2130.176.G.M01.4002B  
34.  **Electronic module cover**  
Electronic module cover held by 3 screws 4000.250.








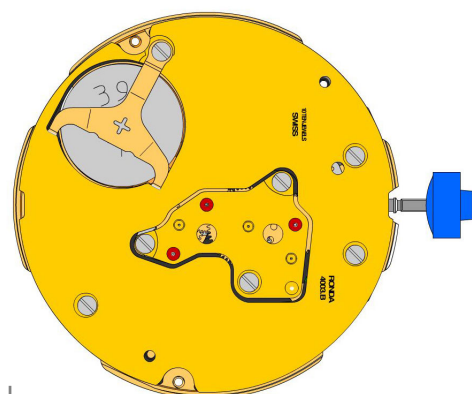

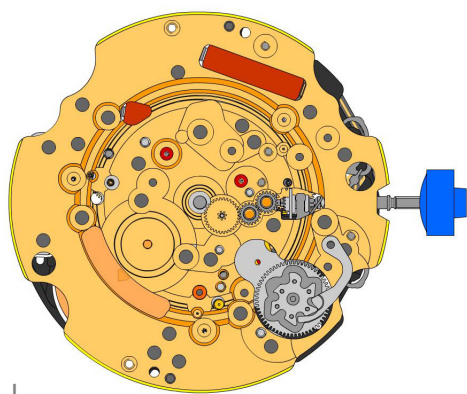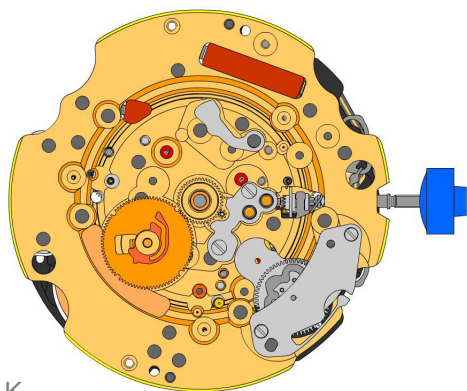




3600.010.HGF  
35.  **Battery 395**


3601.109.G  
36.  **Bridle +**  
Bridle held by 1 screw 4000.250.

4000.250  
37.  **Screw**


**I**


**J**

**K**

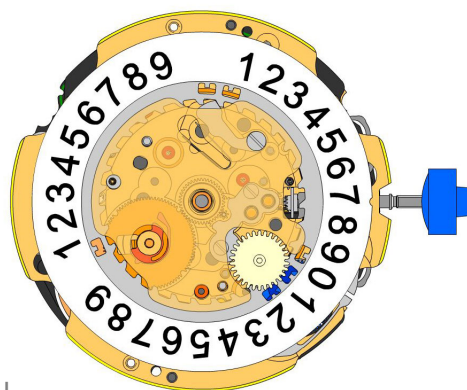
2000.577.G 38.		Main plate
3004.164 39.		Setting wheel
3004.164 40.		Setting wheel
3007.054.CO 41.		Minute wheel
2130.143 42.		Minute train bridge Minute train bridge held by 2 screws 4000.250.
4000.305 43.		Screw
3004.223 44.		Tens indicator driving wheel Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.059 45.		Tens jumper Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together.
2130.142 46.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.332. Tensioning the spring arm.
4010.306 47.		Screw
3301.285 48.		Hour wheel (Aig.0)
3315.016 49.		Friction spring
3004.224.CO 50.		Date indicator driving wheel
3500.049 51.		Date jumper




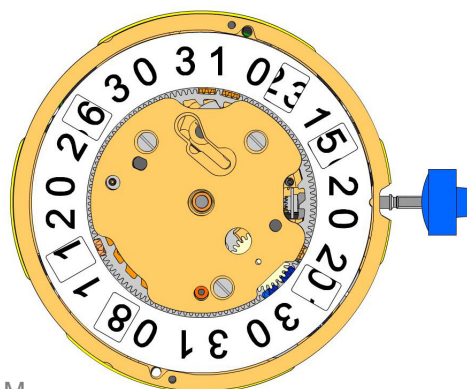
L

3504.214.AD.1.A  
52.  Units indicator (standard)  
Nick of the indicator at 3 o'clock.

3147.054  
53.  Tens intermediate wheel


2130.141  
54.  Date indicator maintaining plate  
Date indicator maintaining plate held by 1 screw 4000.250.

3905.070  
55.  Date jumper spring  
Insert the date jumper spring in the provided opening.



M

3504.215.AD.1.A  
56.  Tens indicator (standard)  
Nick of the indicator at 3 o'clock.

2130.140.G  
57.  Date mechanism maintaining plate  
Date mechanism maintaining plate held by 2 screws 4000.250.

4000.250  
58.  Screw

3506.072.G  
59.  Dial support


8200  
60.  Moebius 8200

9014  
61.  Moebius 9014


124  
62.  Jismaa 124

9020  
63.  Moebius 9020



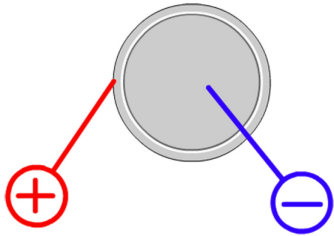


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

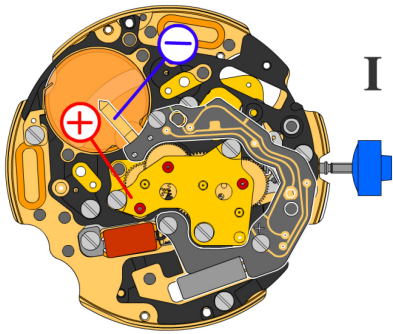


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.19 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.20 V</b>

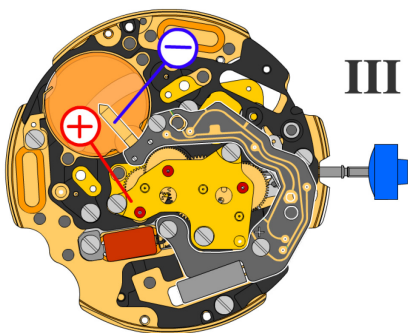


*Setting stem in position III, 60 s measuring interval:*

Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

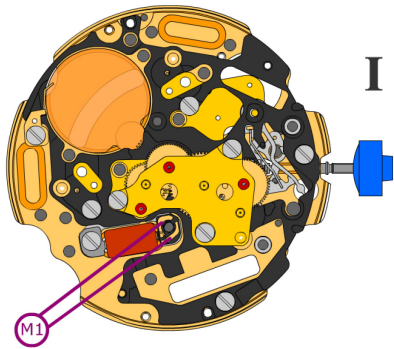

Coil resistance M1

**2.20 k $\Omega$  .. 2.40 k $\Omega$**

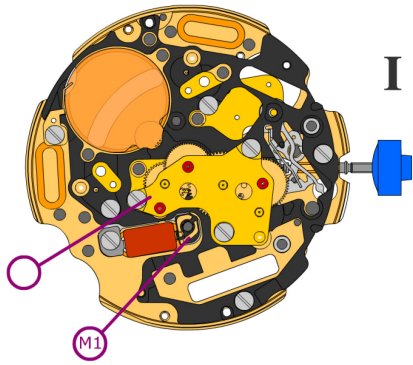

Coil isolation M1

**$\infty$  k $\Omega$**