








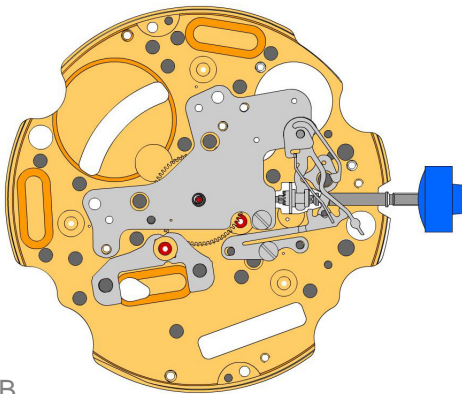

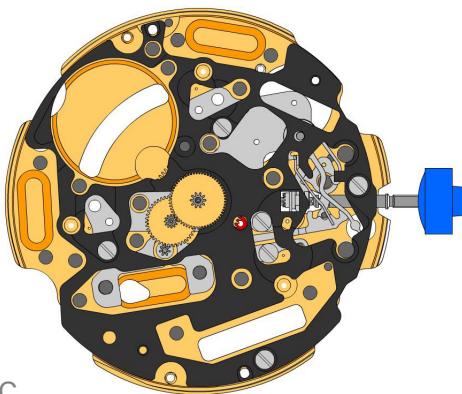

A





B




C

2000.577.G 1.		Main plate
3305.315.CO 2.		Cannon pinion with driver (Aig.0, closed)
2030.037.CO 3.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 4.		Screw
3001.055.FI 5.		Sliding pinion
3000.177.CO 6.		Setting stem
3017.049 7.		Setting lever
3905.049 8.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 9.		Screw
3015.081 10.		Yoke (3 positions)
3905.067 11.		Yoke spring Tensioning the spring arm.
3622.039 12.		Stator (counter 6h, 9h, chrono)
3603.079 13.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
4000.250 14.		Screw
3715.094.RK 15.		Rotor
3147.047.CO 16.		Intermediate wheel (chrono)
3136.170.CO 17.		Center second wheel (short)

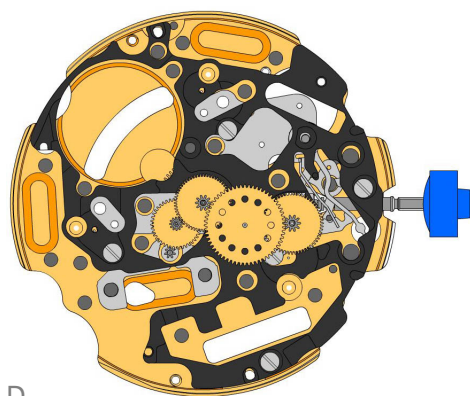

D


3136.148.CO
18.  Second wheel (short)

3122.056.CO
19.  Third wheel

2020.164.G
20.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.

4000.250
21.  Screw

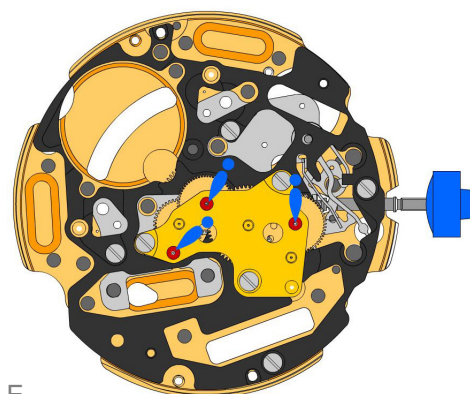
E

3621.079.RK
22.  Coil (center)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250
23.  Screw

3603.034
24.  Battery insulator


3503.071
25.  Tube


3601.118
26.  Contact strip
Contact strip held by 1 screw 4000.250.

4000.250
27.  Screw


3503.059
28.  Tube

3503.068
29.  Tube

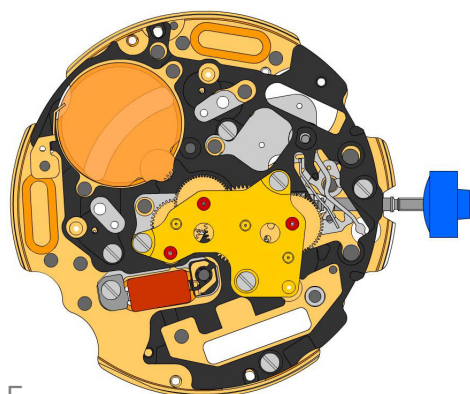
F

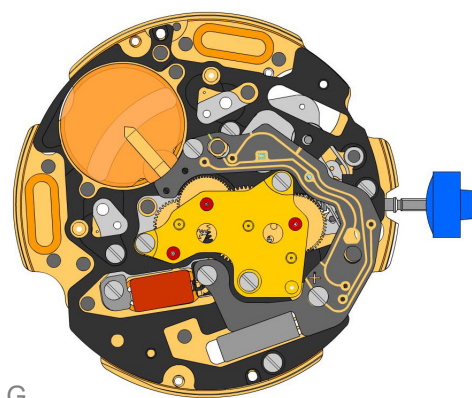


G

3612.147.4003
30.  **Electronic module**
Electronic module held by 1 screw 4000.248. Electronic measurements may be realised now.

4000.248
31.  **Screw**

3603.069
32.  **Circuit insulator**

3601.107.G
33.  **Pusher contact spring**

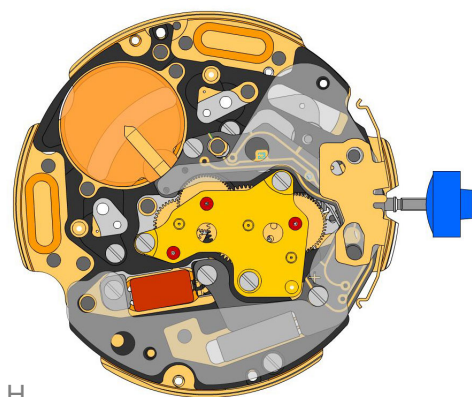


H

2130.176.G.M01.4002B
34.  **Electronic module cover**
Electronic module cover held by 3 screws 4000.250.



3600.010.HGF
35.  **Battery 395**






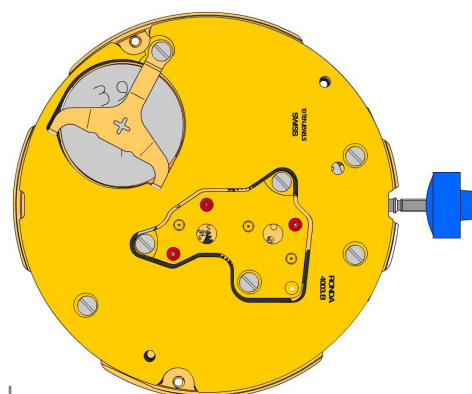



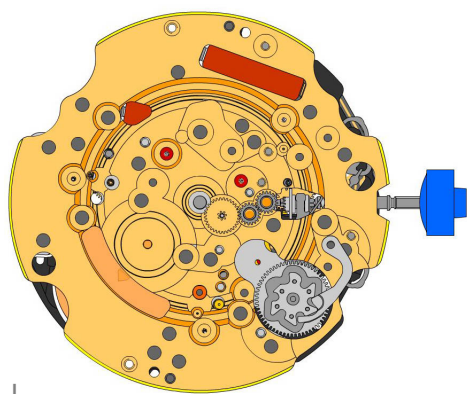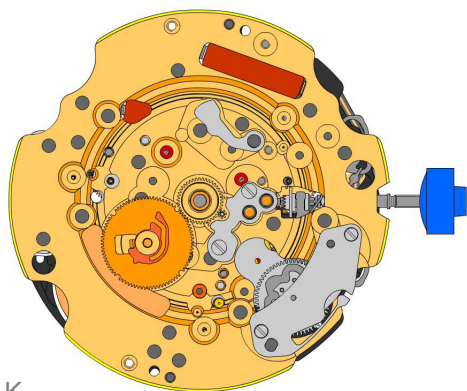




3601.109.G
36.  **Bridle +**
Bridle held by 1 screw 4000.250.


4000.250
37.  **Screw**



I


J

K

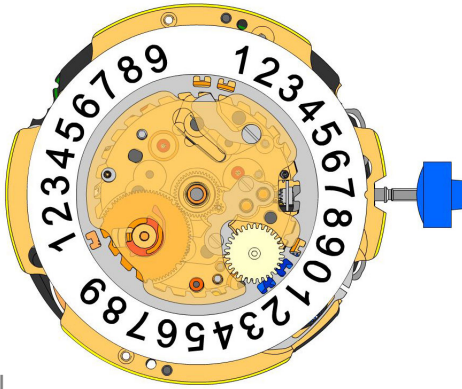
2000.577.G 38.		Main plate
3004.164 39.		Setting wheel
3004.164 40.		Setting wheel
3007.054.CO 41.		Minute wheel
2130.143 42.		Minute train bridge Minute train bridge held by 2 screws 4000.250.
4000.305 43.		Screw
3004.227 44.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 45.		Tens jumper
2130.142 46.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.332. Tensioning the spring arm.
4010.306 47.		Screw
3301.285 48.		Hour wheel (Aig.0)
3315.016 49.		Friction spring
3004.224.CO 50.		Date indicator driving wheel
3500.049 51.		Date jumper




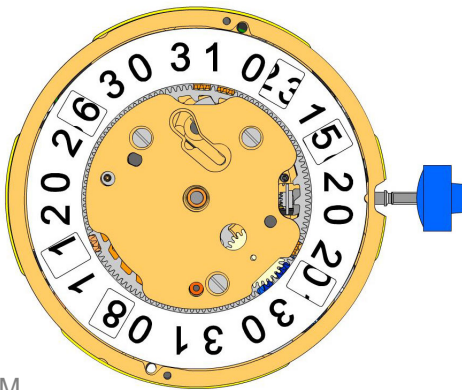
L

3504.214.AD.1.A
52.  Units indicator (standard)
Nick of the indicator at 3 o'clock.

3147.054
53.  Tens intermediate wheel


2130.141
54.  Date indicator maintaining plate
Date indicator maintaining plate held by 1 screw 4000.250.

3905.070
55.  Date jumper spring
Insert the date jumper spring in the provided opening.



M

3504.215.AD.1.A
56.  Tens indicator (standard)
Nick of the indicator at 3 o'clock.

2130.140.G
57.  Date mechanism maintaining plate
Date mechanism maintaining plate held by 2 screws 4000.250.

4000.250
58.  Screw


3506.072.G
59.  Dial support

8200
60.  Moebius 8200


9014
61.  Moebius 9014

124
62.  Jismaa 124

9020
63.  Moebius 9020

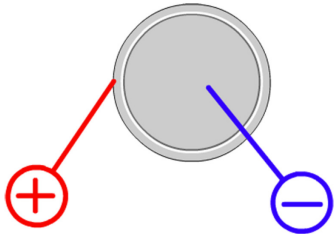


Battery	395
Voltage	1.55 V

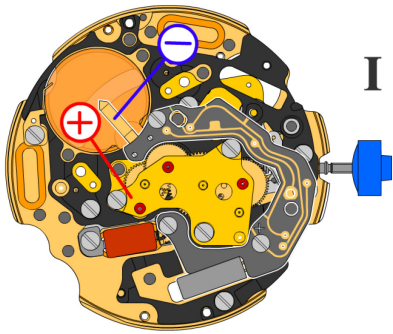


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.19 μA
Maximal consumption	1.65 μA
Rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

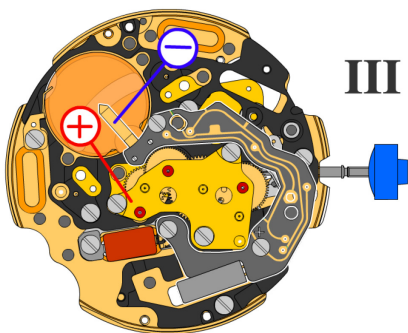


Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

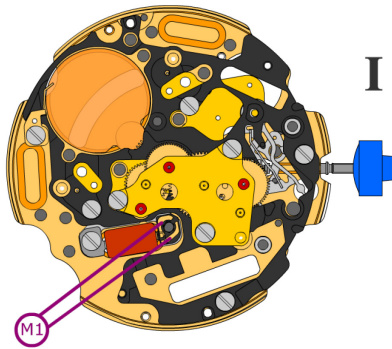

Coil resistance M1

2.20 kΩ .. 2.40 kΩ

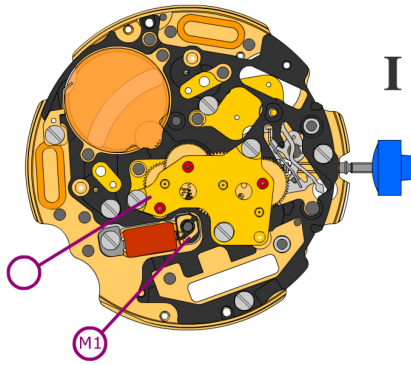

Coil isolation M1

∞ kΩ