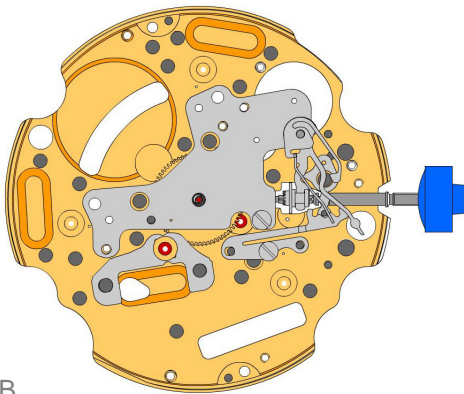
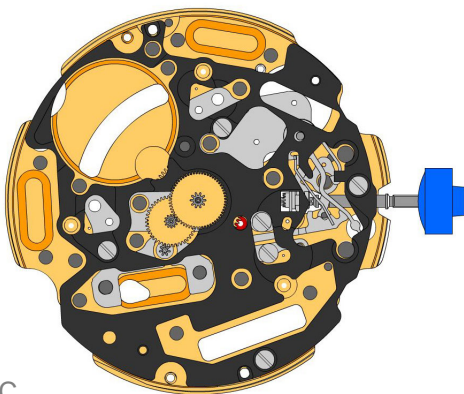
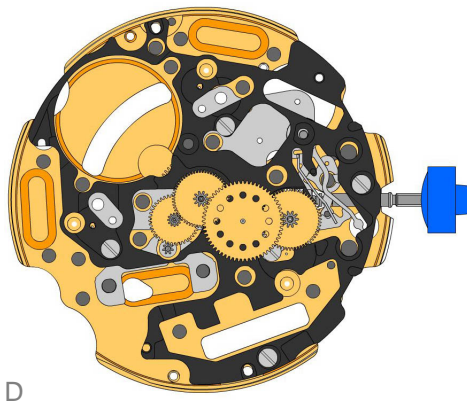


A

B

C

2000.577.G 1.		Main plate
3305.314.CO 2.		Cannon pinion with driver (Aig.0)
2030.017.CO 3.		Centre bridge Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together. Centre bridge held by 1 screw 4000.250.
4000.250 4.		Screw
3001.055.FI 5.		Sliding pinion
3000.177.CO 6.		Setting stem
3017.049 7.		Setting lever
3905.049 8.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 9.		Screw
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3622.039 12.		Stator (counter 6h, 9h, chrono)
3603.079 13.		Plastic bracket Platic bracket held by 4 screws 4000.250.
4000.250 14.		Screw
3715.094.RK 15.		Rotor
3147.047.CO 16.		Intermediate wheel (chrono)
3136.172.CO 17.		Second wheel (Aig.0)



D


3136.148.CO
18.  Second wheel (short)

3122.056.CO
19.  Third wheel

2020.164.G
20.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.

4000.250
21.  Screw

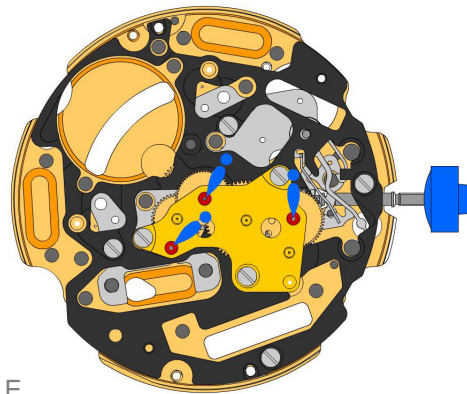
E


3621.079.RK
22.  Coil (center)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250
23.  Screw


3603.034
24.  Battery insulator


3503.071
25.  Tube

3503.059
26.  Tube




3601.118
27.  Contact strip
Contact strip held by 1 screw 4000.250.

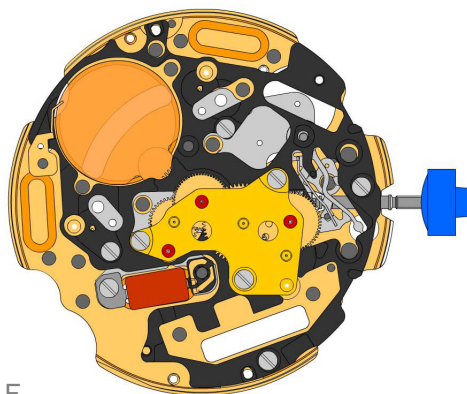
4000.250
28.  Screw

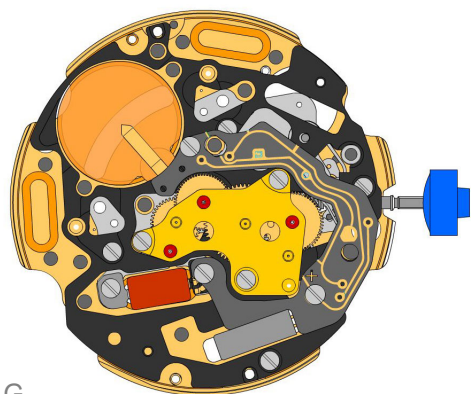
F







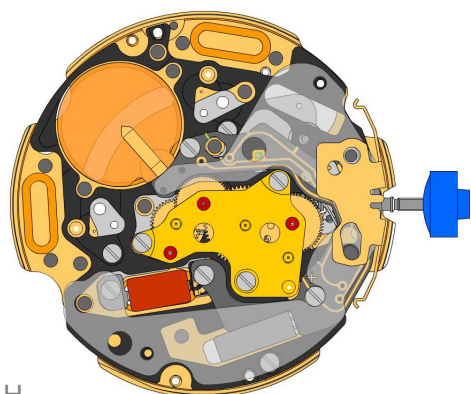



G










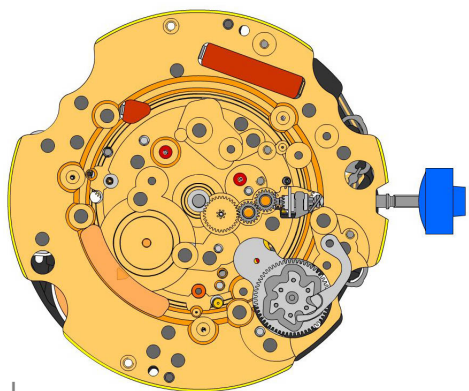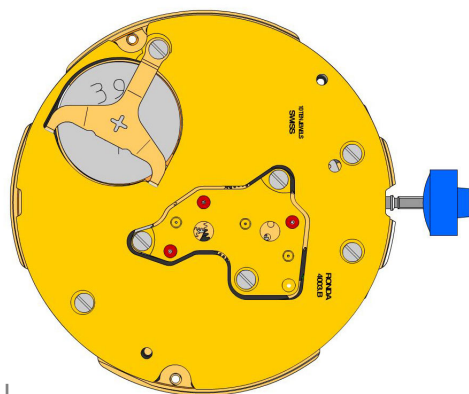




3612.147.4003 29.		Electronic module Electronic module held by 3 screws 4000.248. Electronic measurements may be realised now.
4000.248 30.		Screw
3503.068 31.		Tube








H


3603.069 32.		Circuit insulator
3601.107.G 33.		Pusher contact spring
2130.176.G.M01.4003B 34.		Electronic module cover Electronic module cover held by 3 screws 4000.250.
3600.010.HGF 35.		Battery 395
3601.109.G 36.		Bridle + Bridle held by 1 screw 4000.250.
4000.250 37.		Screw

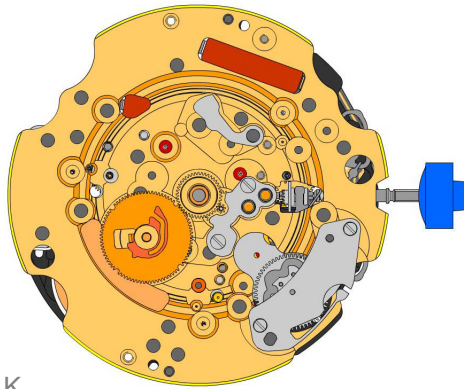







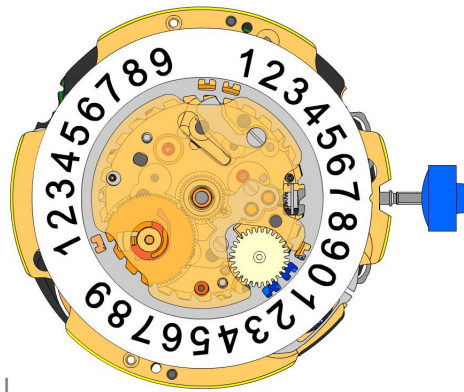


2000.577.G 38.		Main plate
3004.164 39.		Setting wheel
3004.164 40.		Setting wheel
3007.054.CO 41.		Minute wheel
2130.143 42.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 43.		Screw
3004.223 44.		Tens indicator driving wheel Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.059 45.		Tens jumper Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together.
2130.142 46.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Tensioning the spring arm.
4010.306 47.		Screw
3301.285 48.		Hour wheel (Aig.0)
3315.016 49.		Friction spring
3004.224.CO 50.		Date indicator driving wheel
3500.049 51.		Date jumper


K


3504.214.AF 52.		Units indicator (standard) Nick of the indicator at 3 o'clock.
3147.054 53.		Tens intermediate wheel
2130.141 54.		Date indicator maintaining plate Date indicator maintaining plate held by 1 screw 4000.250.
3905.070 55.		Date jumper spring Insert the date jumper spring in the provided opening.


L

3504.216.AF 56.		Tens indicator (standard) Nick of the indicator at 3 o'clock.
2130.140.G 57.		Date mechanism maintaining plate Date mechanism maintaining plate held by 1 screw 4000.250.
4000.250 58.		Screw
3506.072.G 59.		Dial support
8200 60.		Moebius 8200
9014 61.		Moebius 9014
124 62.		Jismaa 124
9020 63.		Moebius 9020

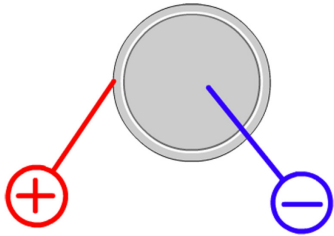


Battery	395
Voltage	1.55 V

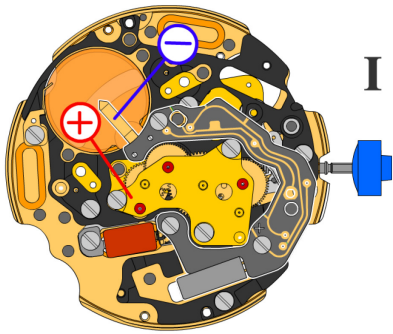


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.19 μA
Maximal consumption	1.65 μA
Rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

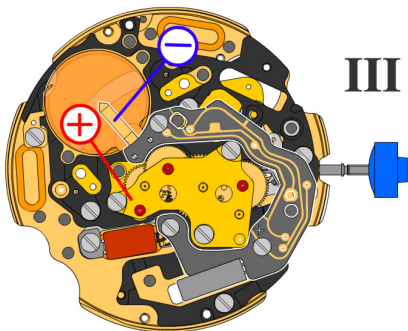


Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

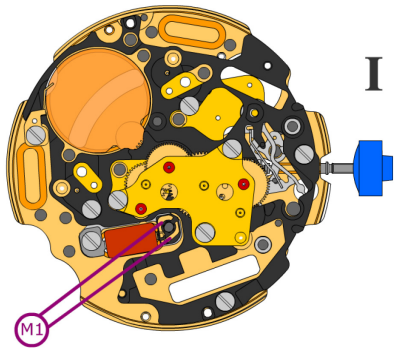

Coil resistance M1

2.20 k Ω .. 2.40 k Ω

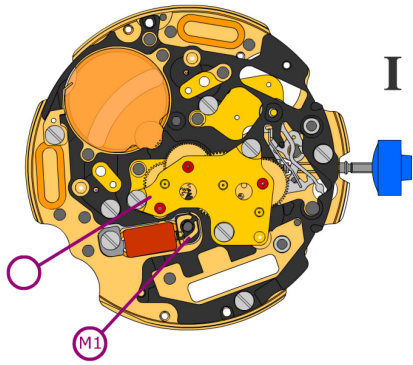

Coil isolation M1

∞ k Ω