

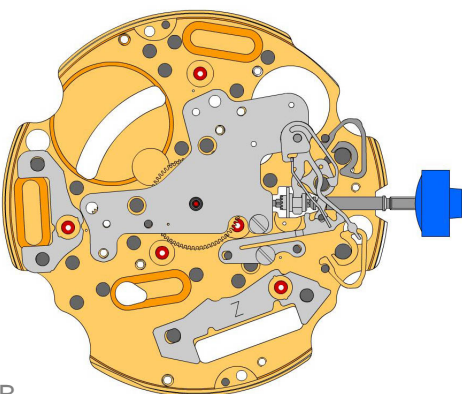


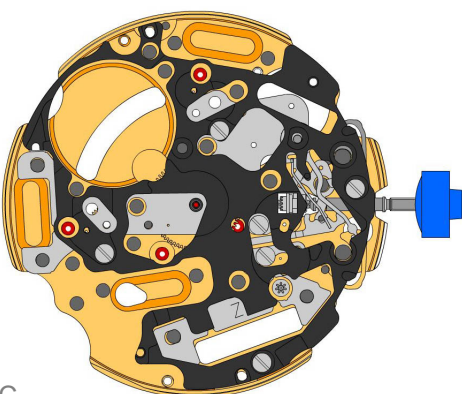



**A**

**B**

**C**


2000.574.G 1.		Main plate
3305.290.CO 2.		Cannon pinion with driver (Aig.2, closed)
3301.243 3.		Hour wheel (counter 24h)

2030.017.CO 4.		Centre bridge Center bridge held by 1 screw 4000.250. Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together.
-------------------	---	---

4000.250 5.		Screw
----------------	---	-------


3001.055.FI 6.		Sliding pinion
-------------------	---	----------------


3000.177.CO 7.		Setting stem
-------------------	---	--------------


3017.049 8.		Setting lever
----------------	--	---------------


3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
----------------	---	--


4000.250 10.		Screw
-----------------	---	-------

3015.081 11.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
-----------------	---	---


3905.067 12.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
-----------------	---	---

3406.030 13.		Pusher jumper B Put the grey jumper between the two posts on the further side.
-----------------	---	---


3406.038 14.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
-----------------	---	--


3622.040 15.		Stator Mark [Z] on stator.
-----------------	---	-------------------------------

3622.039 16.		Stator (counter 6h, 9h, chrono)
-----------------	---	---------------------------------

3603.079 17.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
-----------------	---	---

4000.250 18.		Screw
-----------------	---	-------


3715.094.RK 19.		Rotor
--------------------	---	-------

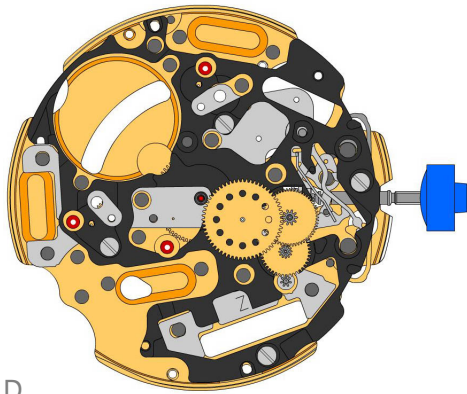

**D**

3147.046.CO  
20.  Intermediate wheel

3136.142.CO  
21.  Second wheel (long)

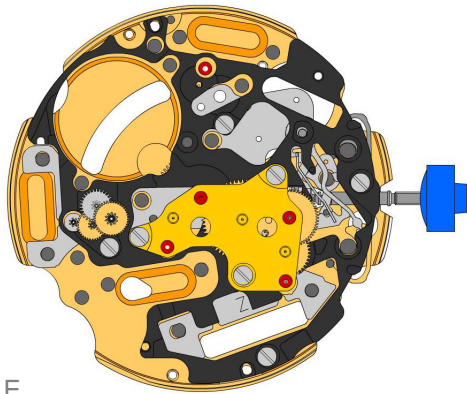3122.056.CO  
22.  Third wheel


**E**

2020.148.G  
23.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.


4000.250  
24.  Screw


3715.095.RK  
25.  Rotor

3147.048.CO  
26.  Intermediate wheel (counter)


3007.055.CO  
27.  Minute wheel (counter 24h)


3402.007.CO  
28.  Minute counting wheel (24h)

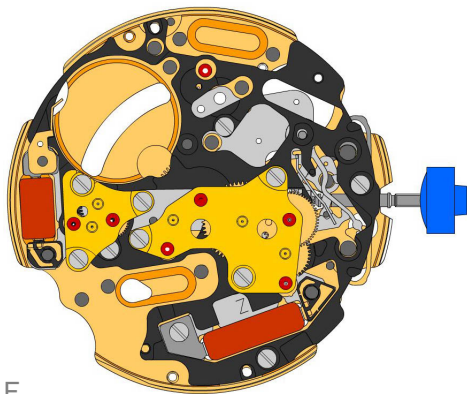
**F**

2020.149.G  
29.  Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
30.  Screw

3621.053.RK  
31.  Coil  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
32.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core.

4000.250  
33.  Screw


3601.118  
34.  Contact strip  
Contact strip held by 1 screw 4000.250.







4000.250  
35.  Screw

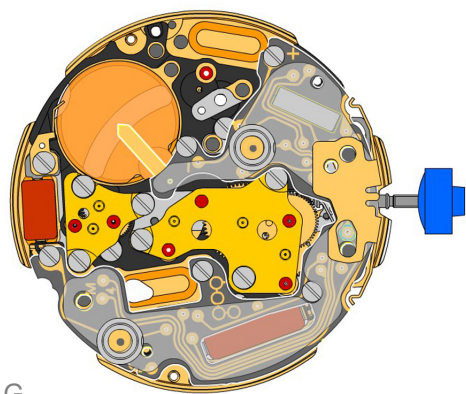
3603.034  
36.  Battery insulator





3503.054  
37.  Tube



3503.054  
38.  Tube

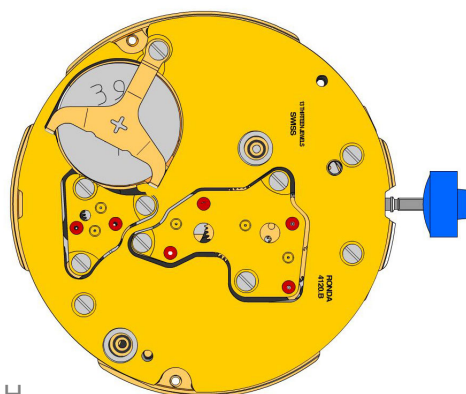








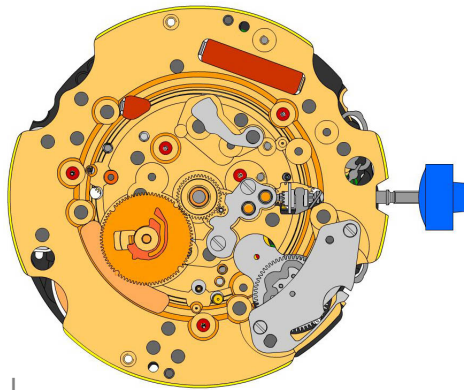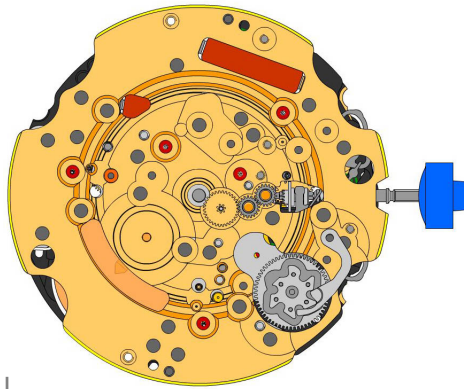





**G**



3612.176.4120 39.		<b>Electronic module</b> Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 40.		<b>Screw</b>
3603.069 41.		<b>Circuit insulator</b>
3603.070 42.		<b>Contact insulator</b>
3603.070 43.		<b>Contact insulator</b>
3601.107.G 44.		<b>Pusher contact spring</b>






**H**



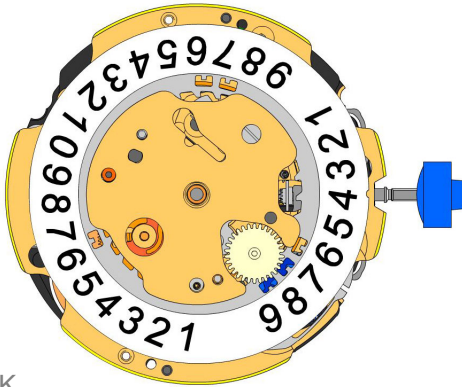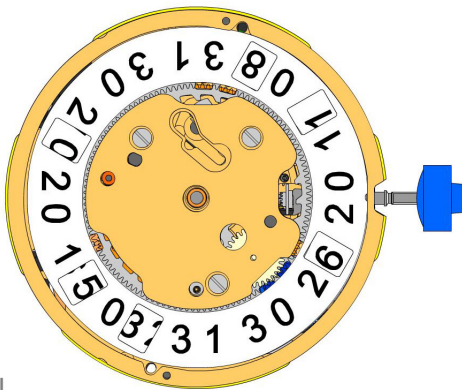

2130.160.G.M01.4120B 45.		<b>Electronic module cover</b> Electronic module held by 5 screws 4000.250.
3600.010.HGF 46.		<b>Battery 395</b>
3601.109.G 47.		<b>Bridle +</b> Bridle held by 1 screw 4000. 250.
4000.250 48.		<b>Screw</b>








2000.574.G 49.		Main plate
3004.164 50.		Setting wheel
3004.164 51.		Setting wheel
3007.054.CO 52.		Minute wheel
2130.143 53.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 54.		Screw
3004.223 55.		Tens indicator driving wheel Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.059 56.		Tens jumper Parts 2030.017.CO, 3004.223 and 3500.059 must be exchanged together.
2130.142 57.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Tensioning the spring arm.
4010.306 58.		Screw
3301.242 59.		Hour wheel (Aig.2)
3315.016 60.		Friction spring
3004.224.CO 61.		Date indicator driving wheel
3500.049 62.		Date jumper


**K**

**L**


3504.214.AD.1.A 63.		<b>Units indicator (standard)</b> Nick of the indicator at 3 o'clock.
3147.054 64.		<b>Tens intermediate wheel</b>
2130.141 65.		<b>Date indicator maintaining plate</b> Date indicator maintaining plate held by 1 screw 4000.250.
3905.070 66.		<b>Date jumper spring</b> Insert the date jumper spring in the provided opening.

3504.215.AD.1.A 67.		<b>Tens indicator (standard)</b> Nick of the indicator at 3 o'clock.
2130.140.G 68.		<b>Date mechanism maintaining plate</b> Date mechanism maintaining plate held by 2 screws 4000.250.
4000.250 69.		<b>Screw</b>
3506.072.G 70.		<b>Dial support</b>

8200 71.		<b>Moebius 8200</b>
9014 72.		<b>Moebius 9014</b>
124 73.		<b>Jismaa 124</b>
9020 74.		<b>Moebius 9020</b>




Battery	<b>395</b>
Voltage	<b>1.55 V</b>

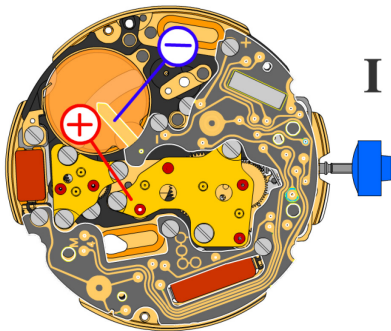


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.42 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.20 V</b>

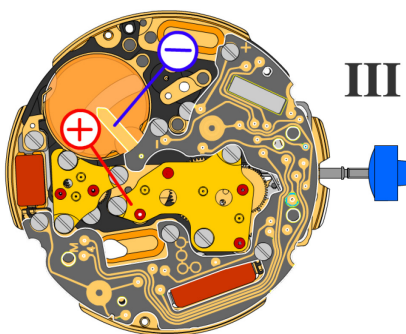

*Setting stem in position III, 60 s measuring interval:*


Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

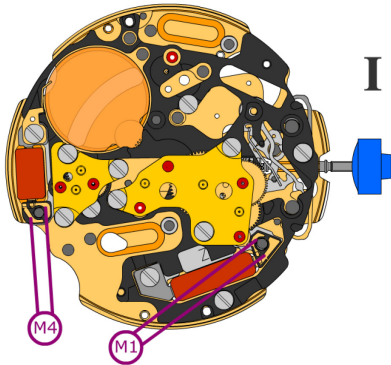


Coil resistance M1

**1.90 k $\Omega$  .. 2.10 k $\Omega$** 

Coil resistance M4

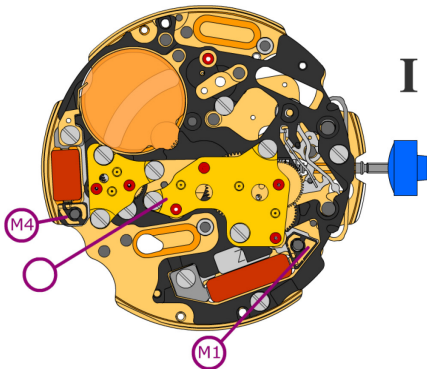**1.68 k $\Omega$  .. 1.88 k $\Omega$** 


Coil isolation M1/M4

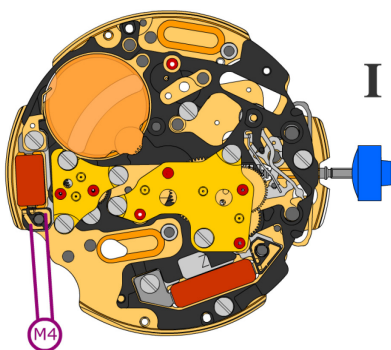 **$\infty$  k $\Omega$** 

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit M4

**1.20 V**