







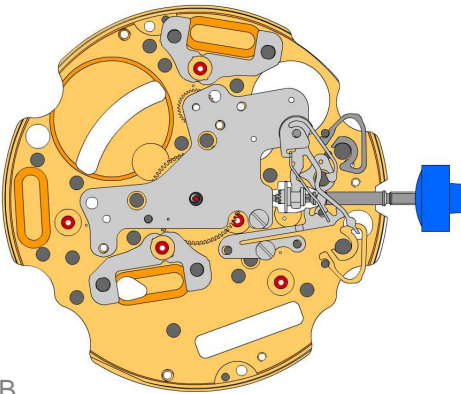

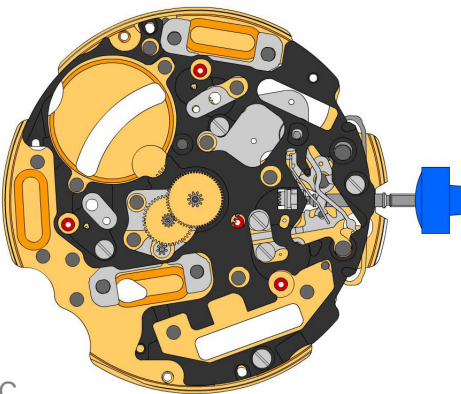










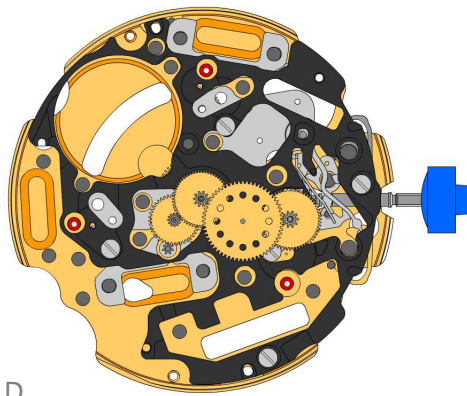


**A**

**B**

**C**

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.243 3.		Hour wheel (counter 12h)


2030.024.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250.
3001.055.FI 5.		Sliding pinion
3000.177.CO 6.		Setting stem
3017.049 7.		Setting lever
3905.049 8.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 9.		Screw
3015.081 10.		Yoke (3 positions)
3905.067 11.		Yoke spring Tensioning the spring arm.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.039 14.		Stator (6h, 9h, chrono)


3603.079 15.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
4000.250 16.		Screw
3715.094.RK 17.		Rotor
3147.047.CO 18.		Intermediate wheel (chrono)
3136.156.CO 19.		Second wheel (Aig.2)


**D**

3136.148.CO  
20.  Chronograph wheel (Aig.2)

3122.056.CO  
21.  Third wheel

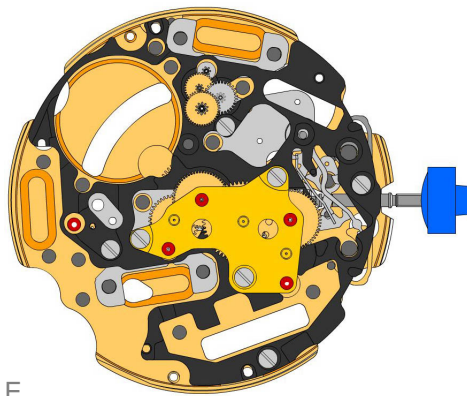
**E**

2020.148.G  
22.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.


4000.250  
23.  Screw


3715.095.RK  
24.  Rotor

3147.048.CO  
25.  Intermediate wheel (counter)


3007.055.CO  
26.  Minute wheel (counter 12h)


3402.007.CO  
27.  Minute counting wheel (12h)

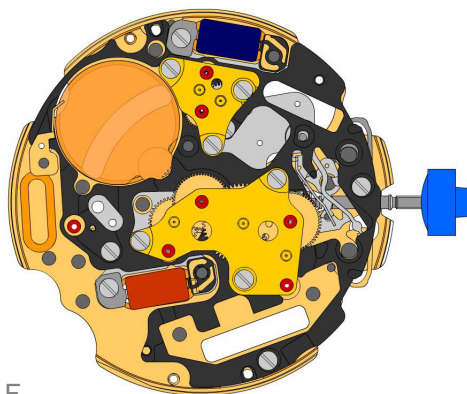
**F**

2020.149.G  
28.  Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
29.  Screw

3621.055.RK  
30.  Coil (counter 6h)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.079.RK  
31.  Coil (center)  
Attention: Please hold the coil only on the grey coil core.


3503.071  
32.  Tube





3601.118  
33.  Contact strip  
Contact strip held by 1 screw 4000.250.


4000.250  
34.  Screw

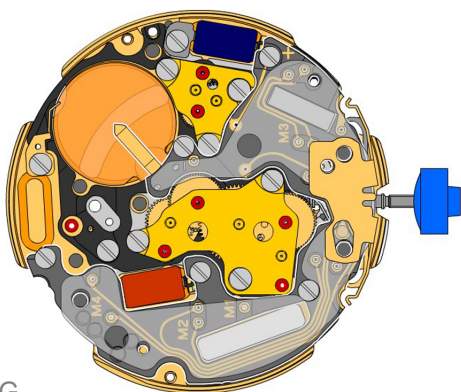



3603.034  
35.  Battery insulator



3503.054  
36.  Tube

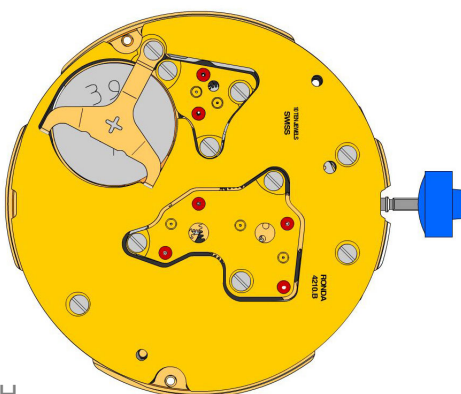








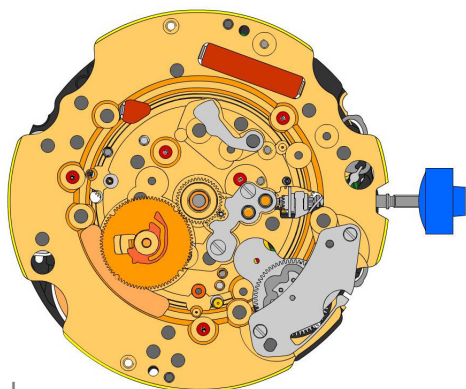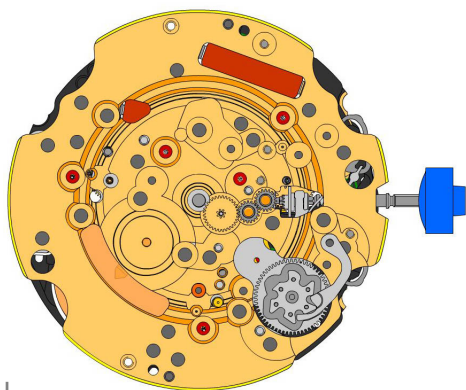




**G**


3612.146.4210 37.		<b>Electronic module</b> Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 38.		<b>Screw</b>
3603.069 39.		<b>Circuit insulator</b>
3601.107.G 40.		<b>Pusher contact spring</b>






**H**


2130.139.G.M01.4210B 41.		<b>Electronic module cover</b> Electronic module cover held by 3 screws 4000.250.
3600.010.HGF 42.		<b>Battery 395</b>
3601.109.G 43.		<b>Bridle +</b> Bridle held by 1 screw 4000.250.
4000.250 44.		<b>Screw</b>

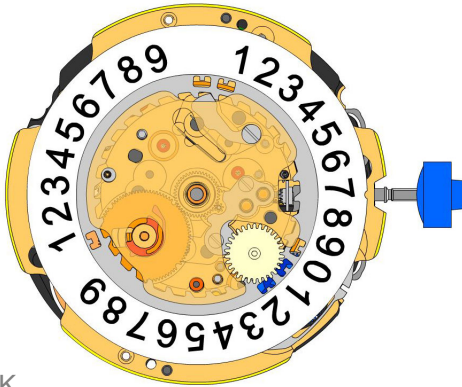







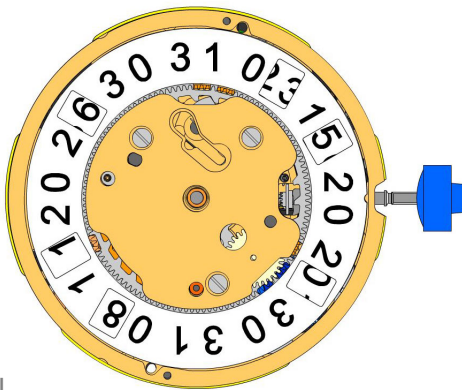


2000.574.G 45.		Main plate
3004.164 46.		Setting wheel
3007.054.CO 47.		Minute wheel
2130.143 48.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 49.		Screw
3004.227 50.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 51.		Tens jumper
2130.142 52.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Tensioning the spring arm.
4010.306 53.		Screw
3301.242 54.		Hour wheel (Aig.2)
3315.016 55.		Friction spring
3004.224.CO 56.		Date indicator driving wheel
3500.049 57.		Date jumper


**K**


3504.214.AF.1.A 58.		<b>Units indicator (standard)</b> Nick of the indicator at 3 o'clock.
3147.054 59.		<b>Tens intermediate wheel</b>
2130.141 60.		<b>Date indicator maintaining plate</b> Date indicator maintaining plate held by 1 screw 4000.250.
3905.070 61.		<b>Date jumper spring</b> Insert the date jumper spring in the provided opening.


**L**

3504.216.AF.1.A 62.		<b>Tens indicator (standard)</b> Nick of the indicator at 3 o'clock.
2130.140.G 63.		<b>Date mechanism maintaining plate</b> Date mechanism maintaining plate held by 2 screws 4000.250.
4000.250 64.		<b>Screw</b>
3506.072.G 65.		<b>Dial support</b>
8200 66.		<b>Moebius 8200</b>
9014 67.		<b>Moebius 9014</b>
124 68.		<b>Jismaa 124</b>
9020 69.		<b>Moebius 9020</b>

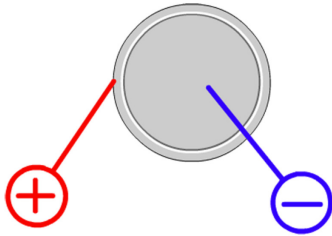


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

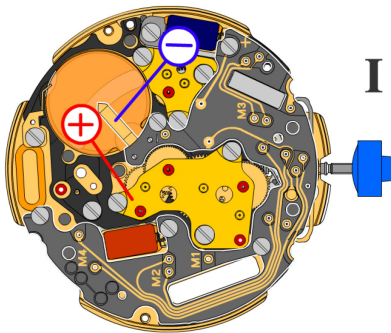


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.32 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.20 V</b>

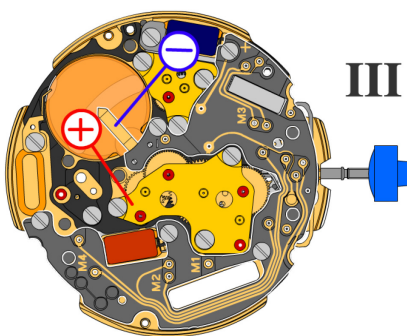

*Setting stem in position III, 60 s measuring interval:*


Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

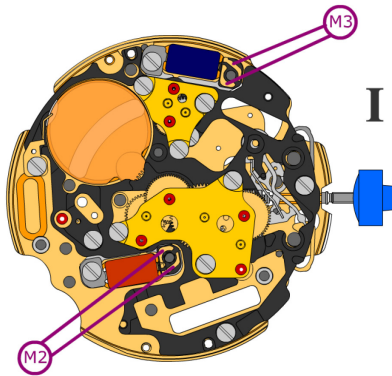


Coil resistance M2

**2.20 kΩ .. 2.40 kΩ**

Coil resistance M3

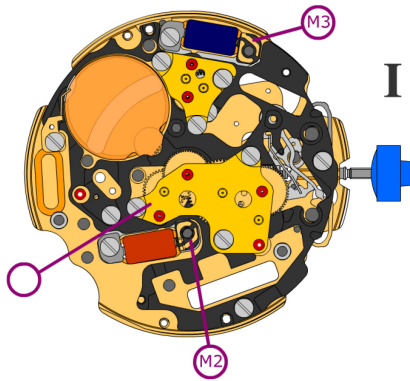**1.68 kΩ .. 1.88 kΩ**


Coil isolation M2/M3

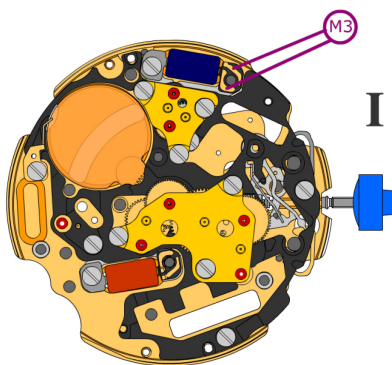 $\infty$  kΩ

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit M3

**1.20 V**