







- | | | | |
|---|---|------------------|--------------------|
| 1 |  | 2000.365.SM.G.LC | Werkplatte |
| 2 |  | 3622.018 | Stator |
| 3 |  | 3305.174.CO | Minutenrohr (Aig.) |
| 4 |  | J124 | Jismaa 124 |



- | | | | |
|---|---|-------------|---------------|
| 5 |  | 2020.104.CO | Zentrumbrücke |
| 6 |  | 4000.141 | Schraube |
| 7 |  | 3715.100.RK | Rotor |
| 8 |  | 3147.020.CO | Zwischenrad |
| 9 |  | 3122.045.CO | Kleinbodenrad |



- | | | | |
|----|---|----------------|-----------------|
| 10 |  | 2020.116.G.M25 | Räderwerkbrücke |
| 11 |  | 4000.141 | Schraube |
| 12 |  | 4000.141 | Schraube |
| 13 |  | 9014 | Moebius 9014 |




14



9014

Moebius 9014



15



9014

Moebius 9014



16



3621.061.RK

Spule

Achtung: Spule nur am grauen Spulenkern halten.

17



3601.039.G


Batteriehalter (+)

18



4000.243

Schraube




19




9014

Moebius 9014



20



21



3603.103

Isolation

22



3601.047


Kontaktbügel (-)

23



3612.252


Elektronikmodul




- | | | | |
|----|---|----------------|--------------------------|
| 24 |  | 2130.251.G.M01 | Modul Abdeckplatte |
| 25 |  | 3601.162.G | Kontaktfeder für Drücker |
| 26 |  | 4000.343 | Schraube |
| 27 |  | 4000.343 | Schraube |




- | | | | |
|----|--|--------------|------------------------------|
| 28 |  | 3600.018.HGF | Batterie 379 (Ø 5.80 x 2.15) |
| 29 |  | 3601.171.G | Batteriehalter |
| 30 |  | 4000.375 | Schraube |




- | | | | |
|----|---|-------------|-------------------|
| 31 |  | 3007.052.CO | Wechselrad |
| 32 |  | 2130.041 | Halteplatte |
| 33 |  | 4000.169 | Schraube |
| 34 |  | 3301.133.TA | Stundenrad (Aig.) |
| 35 |  | 3315.001 | Friktionsfeder |


Measurement

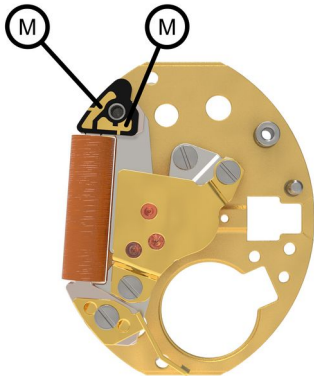


Pulsgenerator (4.9 ms, 8 Hz)
< 1.20 V

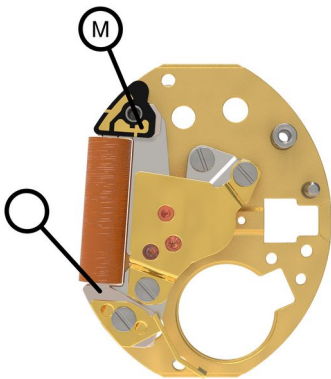

Spulenisolation
infinite

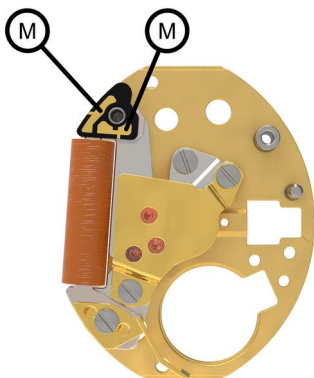


Spulenwiderstand Werk
(min./max) 1425 - 1575 Ohm

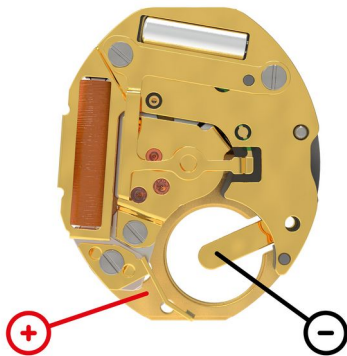

60s Messintervall
(typ./max.) 0.34 / 0.40 μ A

60s Messintervall
-10 .. +20s/mth

Untere Funktionsspannungsgrenze
<1.20 V



Batteriespannung
typ. 1.5 V