






A

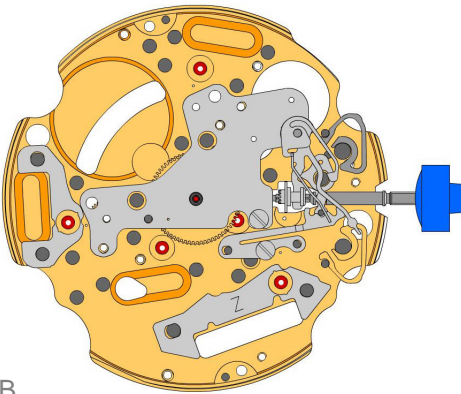





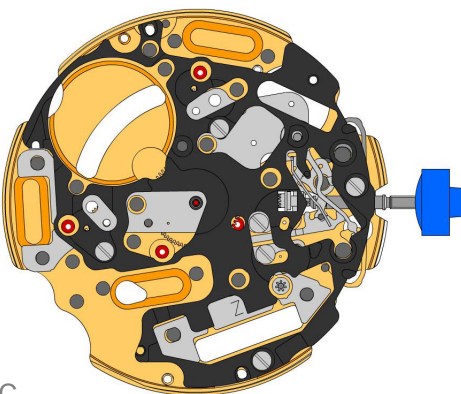











B









C


2000.574.G 1.		Main plate
3305.290.CO 2.		Cannon pinion with driver (Aig.2, closed)
3301.243 3.		Hour wheel (counter 12h)

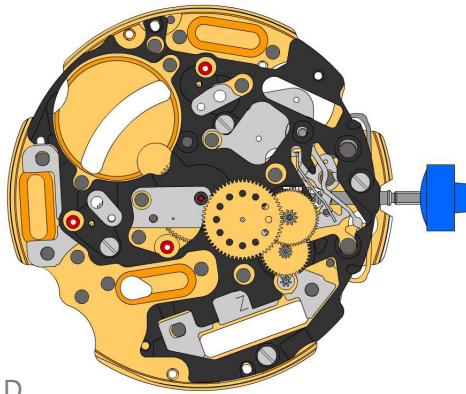





2030.024.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper tenue par 1 vis 4000.250.
4000.250 10.		Screw
3015.081 11.		Yoke (3 positions)
3905.067 12.		Yoke spring Tensioning the spring arm.
3406.030 13.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 14.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 15.		Stator Mark [Z] on stator.
3622.039 16.		Stator (counter 6h, 9h, chrono)

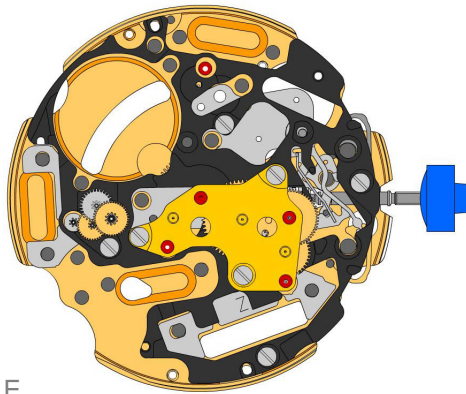
3603.079 17.		Plastic bracket Plastic bracket held by 1 screw 4000.250.
4000.250 18.		Screw
3715.094.RK 19.		Rotor







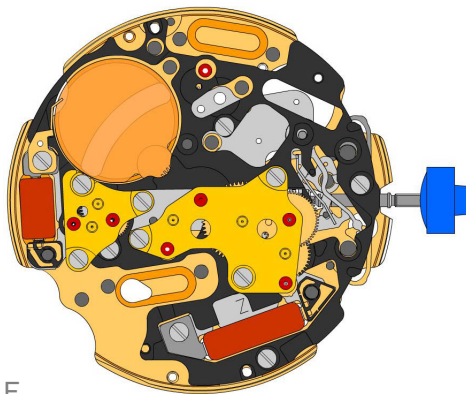

D


3147.046.CO 20.		Intermediate wheel
3136.142.CO 21.		Second wheel (long)
3122.056.CO 22.		Third wheel
2020.148.G 23.		Train wheel bridge Train wheel bridge held by 3 screws 4000.250.
4000.250 24.		Screw






E


3715.095.RK 25.		Rotor
3147.048.CO 26.		Intermediate wheel (counter)
3007.055.CO 27.		Minute wheel (counter 12h)
3402.007.CO 28.		Minute counting wheel (12h)
2020.149.G 29.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 30.		Screw

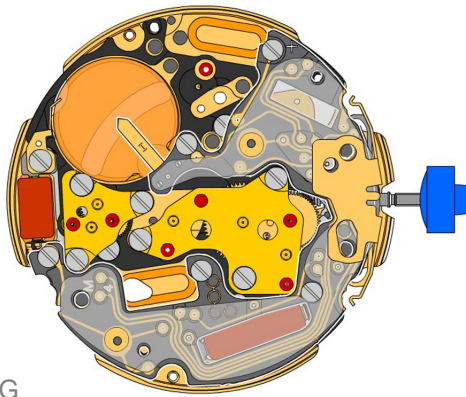




F



3621.053.RK 31.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 32.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core.
3601.118 33.		Contact strip Contact strip held by 1 screw 4000.250.
4000.250 34.		Screw
3503.054 35.		Tube
3503.054 36.		Tube
3603.034 37.		Battery insulator

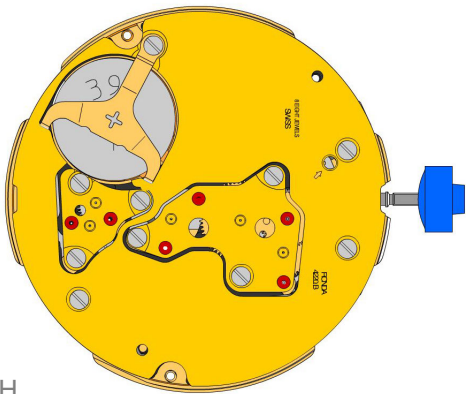








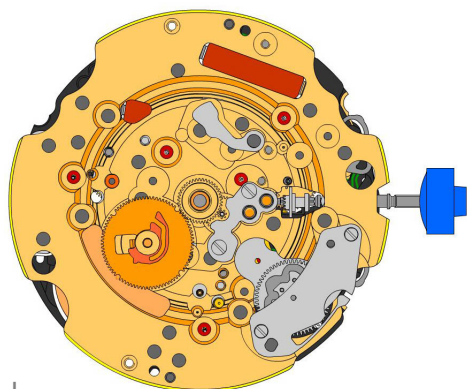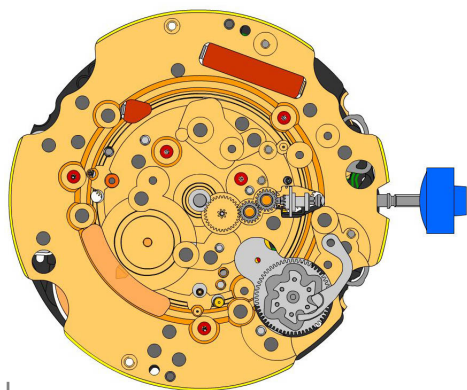





G



3612.144.4220 38.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 39.		Screw
3603.069 40.		Circuit insulator
3601.107.G 41.		Pusher contact spring






H



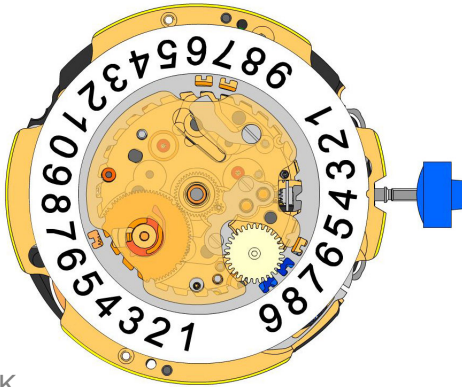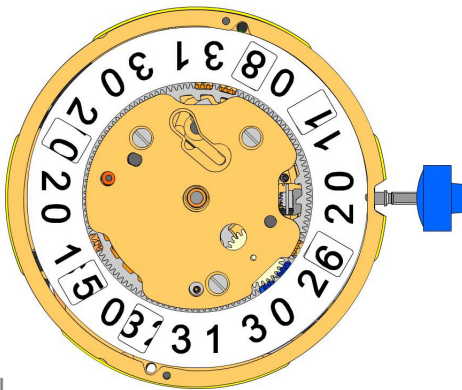

2130.138.G.M01.4220B 42.		Electronic module cover Electronic module cover held by 3 screws 4000.250.
3600.010.HGF 43.		Battery 395
3601.109.G 44.		Bridle + Bridle held by 1 screw 4000.250.
4000.250 45.		Screw








2000.574.G 46.		Main plate
3004.164 47.		Setting wheel
3004.164 48.		Setting wheel
3007.054.CO 49.		Minute wheel
2130.143 50.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 51.		Screw
3004.227 52.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 53.		Tens jumper
2130.142 54.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Tensioning the spring arm.
4010.306 55.		Screw
3301.242 56.		Hour wheel (Fig.2)
3315.016 57.		Friction spring
3004.224.CO 58.		Date indicator driving wheel
3500.049 59.		Date jumper


K

L


3504.214.AD.1.A 60.		Units indicator (standard) Nick of the indicator at 3 o'clock.
3147.054 61.		Tens intermediate wheel
2130.141 62.		Date indicator maintaining plate Date indicator maintaining plate held by 1 screw 4000.250.
3905.070 63.		Date jumper spring Insert the date jumper spring in the provided opening.

3504.215.AD.1.A 64.		Tens indicator (standard) Nick of the indicator at 3 o'clock
2130.140.G 65.		Date mechanism maintaining plate Date mechanism maintaining plate held by 2 screws 4000.250.
4000.250 66.		Screw
3506.072.G 67.		Dial support

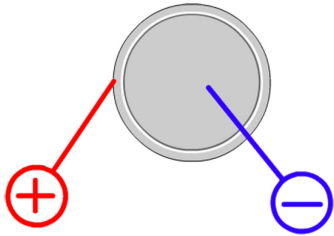8200 68.		Moebius 8200
9014 69.		Moebius 9014
124 70.		Jismaa 124
9020 71.		Moebius 9020




Battery	395
Voltage	1.55 V

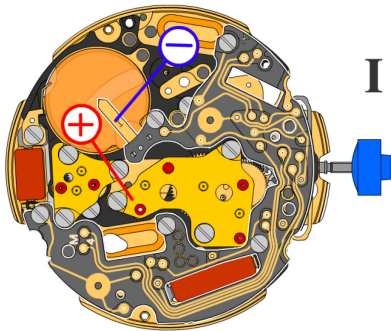


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.32 μA
Maximal consumption	1.65 μA
Rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

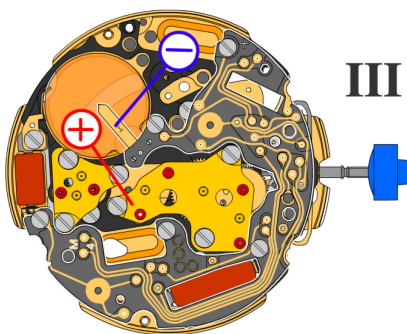

Setting stem in position III, 60 s measuring interval:


Typical consumption	0.10 μA
Maximal consumption	0.30 μA

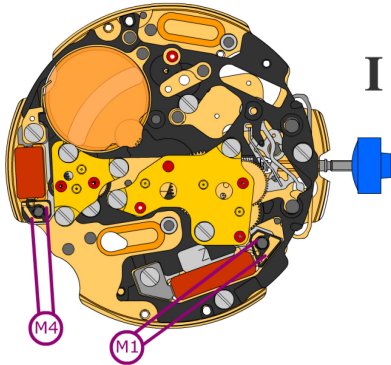


Coil resistance M1

1.90 k Ω .. 2.10 k Ω

Coil resistance M4

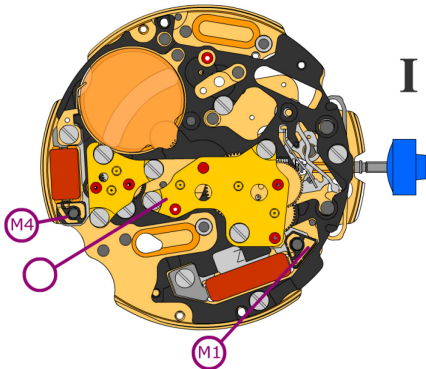1.68 k Ω .. 1.88 k Ω


Coil isolation M1/M4

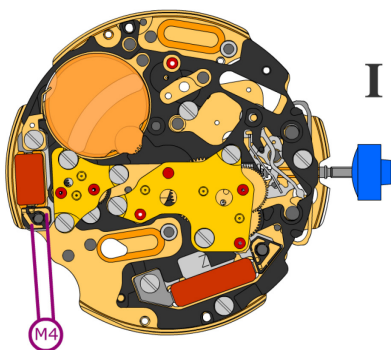 ∞ k Ω

Signal generator (4.9 ms, 8 Hz):

Lower working voltage limit M4

1.20 V