


## Caliber 5050.C – 12½"



### Product Specifications

Analog quartz movement

Line startech

Caliber 5050.C

Size 12½"

Version Swiss Made 13 Jewels / gold plated

Standard battery life 54 months

Standard hand fitting height 2

### Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem:  
Reduction of consumption approximately 70%
- Very easy handling by two pushers
- Big date with quick change

### Functions

- 1/10 second
- 30 minute / 12 hour counter
- Center stop second (1/1 sec)
- 12 hour counter
- ADD and SPLIT functions
- Chronograph
- Day indicator
- Big date
- Small second

# Quartz Movements

## Chronographs

### RONDA startech

## Caliber 5050.C – 12½"


### Technical Specifications

Diameter Total	28.60 mm
Case fitting	28.00 mm
Movement height	4.40 mm
Height over standard battery	4.40 mm
Movement rest	0.60 mm
Height over stem	1.90 mm
Length of stem travel	0.90 mm
Stem thread	0.90 mm
Useful torque second – typical	6 µNm
Useful torque minute – typical	300 µNm
Useful torque center stop second – typical	7 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10



### Battery Specifications


Standard battery	No. 395
Standard battery life	54 months
Battery voltage	1.5 V
Current consumption – typical	1.32 µA (Date Mechanism not in Gear)
Current consumption – maximum	1.65 µA (Date Mechanism not in Gear)

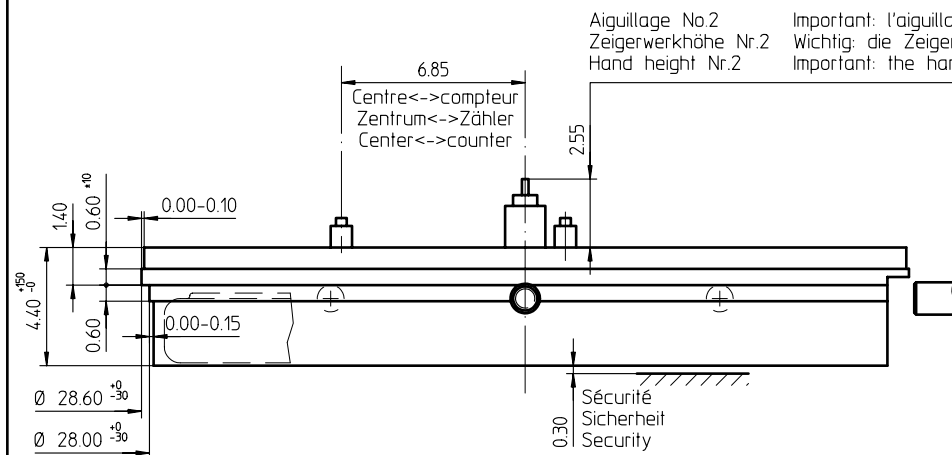

Côté fond de boîte  
Seite Gehäuseboden  
Case back side

Pile  
Batterie (395) Ø 9.50 x 2.60mm  
Battery

Position pour extraire la tige  
Position zum Entfernen der Stellwelle  
Position to remove the stem

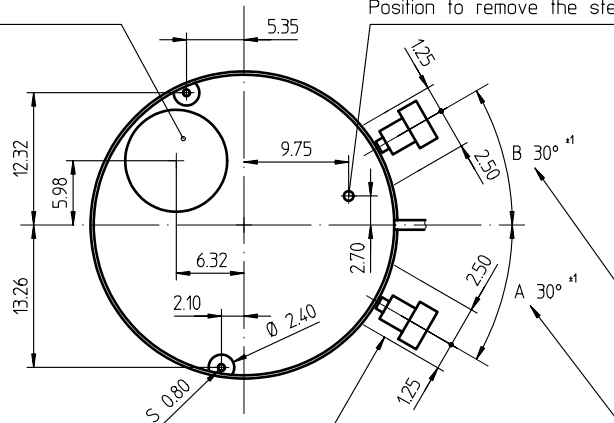

Dégagement cercle d'entourage  
Freistellung Gehäuseering  
Opening movement holder

L'angle indiqué pour la direction du poussoir et la position doivent être respectés. Pour un angle de 0° des poussoirs A et B, voir plan 5000.345  
Der angegebene Winkel für die Drückerrichtung und die Position müssen eingehalten werden. Für einen Drückerwinkel von 0° bei A und B, siehe Zeichnung 5000.345

The indicated angle of the pusher direction and the position must be fulfilled. For pusher angles of 0° (pusher A and B), see drawing 5000.345

Important: l'aiguillage peut varier selon le modèle  
Wichtig: die Zeigerwerkhöhe kann bei verschiedenen Modellen unterschiedlich sein  
Important: the hand height can vary between different models

Poussoirs  
Drücker  
Pushers

Position poussée  
Gedrückte Stellung  
Pushed in  
course  
Weg  
way  
100<sup>+200</sup><sub>-0</sub>


Sécurité entre l'aiguille des secondes et le verre:  
Sicherheit zwischen Sekundenzeiger und Glas: 0.30mm  
Security between second hand and glass:

Le cadran doit être tenu par la boîte  
Das Zifferblatt muss durch die Schale gehalten werden  
The dial must be hold by the case


La course du poussoir doit être limitée dans le poussoir lui-même. Sa position poussée doit être contrôlée.  
Die Weglänge des Drückers ist im Drücker selbst zu begrenzen. In der gedrückten Stellung ist seine Position zu kontrollieren  
The way of the pusher has to be limited in the pusher itself. Its position must be checked while pushed in.

Stellwelle  
Tige  
Stem


Chemin:  
Weg:  
Way:  
0.90  
Filetage:  
Gewinde:  
Thread:  
S 0.90

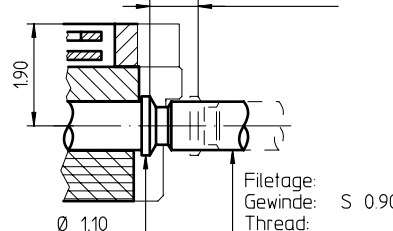


Vis  
Schraube Nr. 4000.310  
Screw



Vis  
Schraube Nr. 4000.195  
Screw



Vis  
Schraube Nr. 4000.194  
Screw



Cage  
Uhrwerkgestell  
Frame



12½"

RONDA



5050.B, 5050.C, 5051.C

Issued	14 Nov 2003	mk
Modified	10.Dez 2007 ÅA 3696	bk
Released	YES	
Tolerance	+/- 20 µm	
Scale	10 : 1 (5 : 1) (A3H)	
Sous réserve de modifications Aenderungen vorbehalten Modifications reserved		
No.	5000.319	03



Angle Winkel Angle	30°
Ø Dp	b
1.00	13.50
1.10	13.50
1.20	13.50
1.30	13.50
1.40	13.50

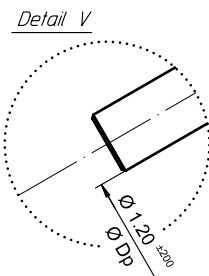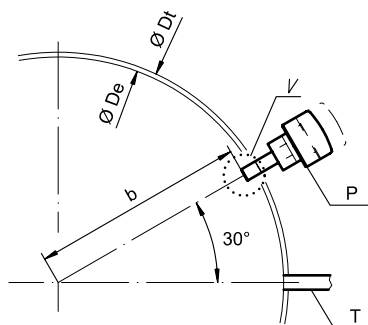



Angle Winkel Angle			20°
Ø Dp	a	b	
1.30	2.57	13.22	
1.40	2.59	13.21	

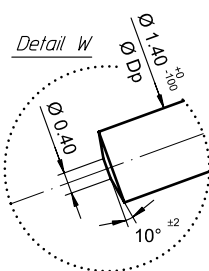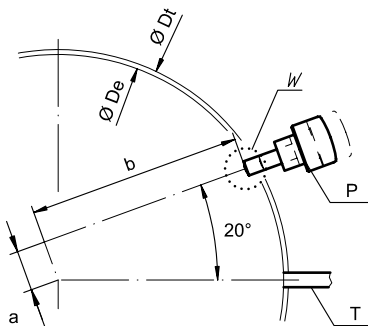



Angle Winkel Angle			15°
Ø Dp	a	b	
1.30	3.83	12.92	
1.40	3.86	12.91	

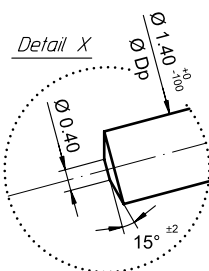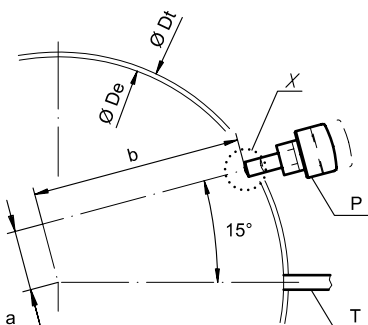

Angle Winkel Angle 10°		
Ø Dp	a	b
1.30	5.06	12.52
1.40	5.10	12.50

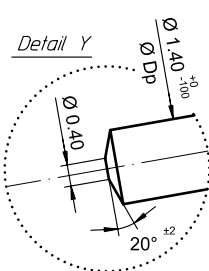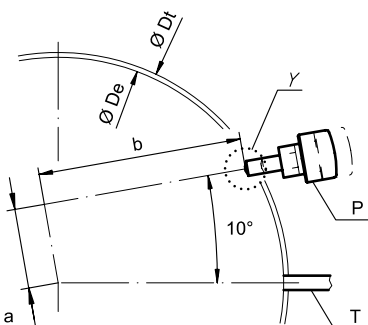

Angle Winkel Angle			0°
Ø Dp	a	b	
1.30	7.40	11.43	
1.40	7.45	11.40	

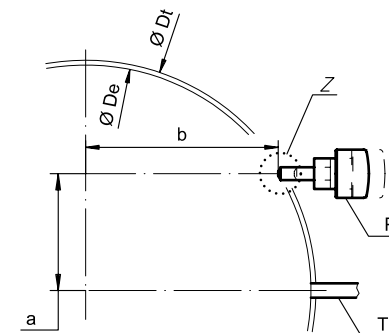

Ø De: diamètre d'encastage  
Durchmesser der Gehäusepassung  
fitting-diameter

Ø Dp: diamètre du poussoir  
Drückerdurchmesser  
pusher-diameter

Ø Dt: diamètre total  
Totaldurchmesser  
total-diameter

P: poussoir en position poussée  
Drücker in gedrückter Stellung  
pusher in pressed position

T: lige de mise à l'heure  
Stellwelle  
stem


Angle des poussoirs A et B  
Winkel der Drücker A und B  
Angle of pusher A and B

RONDA

4xxx.x, 5xxx.x


Issued	06 Sep 2004	mk
Modified	30.März 2005 ÄÄ 1784	mk
Released	YES	
Tolerance	+/- 20 µm	
Scale	10 : 1 (5 : 1) (A3H)	
Sous réserve de modifications Änderungen vorbehalten Modifications reserved		
No.	5000.345	01





Tige	Date
Stellw.	Datum
Stem	Date
3H	6H
	<input type="text"/>

Issued	14 Nov 2003	mk
Modified	15 Juni 2009 ÄÄ 6896	dh
Released	YES	
Tolerance	+/- 20 µm	
Scale	5 : 1 (A4V)	
Sous réserve de modifications Änderungen vorbehalten Modifications reserved		
No.	5010.700	03

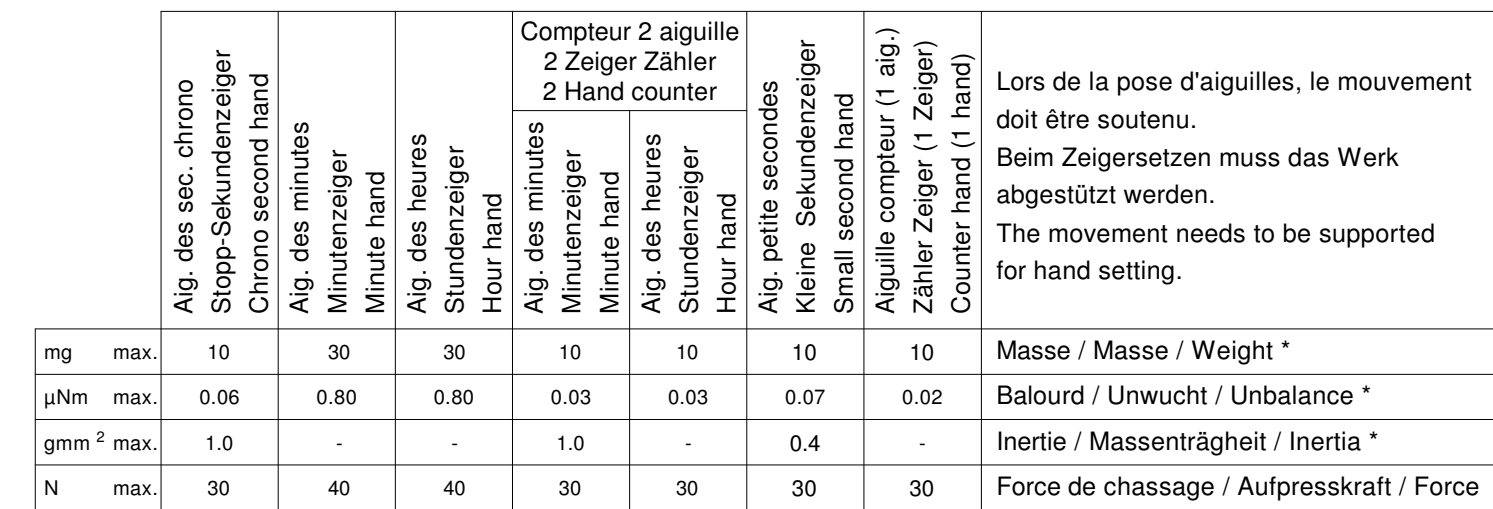

Aiguillages Zeigerwerkhöhe Hand fitting height								
Peinture comprise / inkl. Farbe / Paint included								
Epaisseur maximum du cadran Maximale Zifferblatttdicke Maximum dial thickness								
No	Sous l'aiguille des secondes chrono Unter Stopp-Sekundenzeiger Under chrono second hand	Sous l'aiguille des minutes Unter Minutenzeiger Under minute hand	Sous l'aiguille des heures Unter Stundenzeiger Under hour hand	Compteur 2 aig. 2 Zeiger Zähler 2 Hand counter		Sous l'aiguille de petite seconde Unter kleine Sekundenzeiger Under small second hand	Sous l'aiguille compteur 1 aiguille Unter Zeiger 1 Zeiger Zähler Under hand 1 hand counter	Epaisseur des aiguilles Zeigerdicke Hands thickness
				Sous l'aiguille des minutes Unter Minutenzeiger Under minute hand	Sous l'aiguille des heures Unter Stundenzeiger Under hour hand			
2	2.10	1.55	1.10	0.70	0.40	0.40	0.40	0.15
-								

Aiguillages Zeigerwerkhöhe 12½" Hand fitting heights		Issued	14 Nov 2003	mk
		Modified	15 Okt 2014 ÄA 13275	dh
		Released	Yes	
		Tolerance	µm	
		Scale	20 : 1 (A3H)	
RONDA	5050.B, 5050.C, 5051.C	Sous réserve de modifications Änderungen vorbehalten Modifications reserved		
		No.	3316.082	05



Tige de travail (intégrée dans le mouvement)  
Arbeitsstellwelle (im Werk eingebaut)  
Working stem (implemented in the movement)

No. d'article Artikelnummer Part number	L	L1	L2	L3	S	D
3000.177.CO	20.00	10.23	24.23	10.15	0.90	1.10




Couleur de la couronne Kronenfarbe Crown color	bleu foncé dunkelblau dark blue
Code	UN 5002

Tige (normale) / Stellwelle (normal) / Stem (normal)

No. d'article Artikelnummer Part number	L	L1	L2	L3	S	D
3000.177	20.00	10.23	24.23	10.15	0.90	1.10
3000.191	32.00	22.23	36.23	22.15	0.90	1.10



Couronne normale  
Normale Krone  
Normal crown

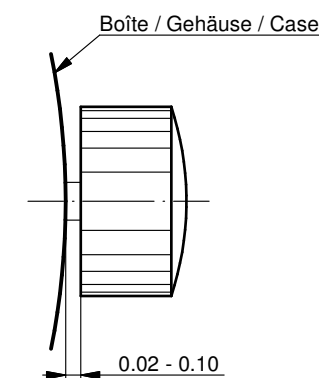


Couronne vissée  
Geschraubte Krone  
Screwed crown

Force ⇐ min. Kraft ⇐ min. Force ⇐ min.	10 N
Force ⇐ max. Kraft ⇐ max. Force ⇐ max.	15 N

Rallonge de tige / Stellwelle Verlängerung / Stem extension

No. d'article Artikelnummer Part number	L4	L5 (min)	L6	S1	S2	D1
3000.040	12.00	1.90	2.60	0.90	0.90	1.35

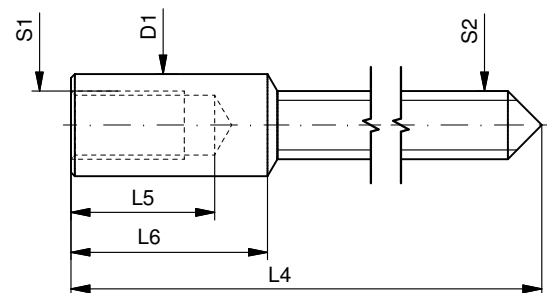

Tige (dimensions / forces)  
Stellwelle (Dimensionen / Kräfte)  
Stem (dimensions / forces)

RONDA

5010.B, 5020.B, 5021.D, 5030.D,  
5040.B, 5040.D, 5040.E, 5040.F,  
5050.B, 5050.C, 5051.C, 5130.B, 5130.D

Issued	05 Sep 2012	ds5222
Modified	17 Mär 2017 ÄA 34582	mg5224
Released	YES	
Tolerance	---	
Scale	10:1 (A3)	

Sous réserve de modifications  
Änderungen vorbehalten  
Modifications reserved

No.	5030.019	01
-----	----------	----



**Movement holder**  
*Removing setting stem*  
H5XXX.1T



**Movement holder**  
*Setting hands*  
H5XXX.1A

## Fitting dial and hands

- Crown in position II
- Wind crown, until date 02 appears
- Crown in position III
- Wind hour hand forwards, until date changes to 03
- Remove working stem
- Fit dial
- Point all hands towards 12 o'clock
- Set time
- Wind hands forwards, until actual weekday and time are displayed
- Zero chronograph hand\*
- Crown in pos. II
- Set date
- Crown in position I


## Date switching duration

*First and tenth digit discs*  
*Weekday*

~2hrs  
~3½hrs

## \*Zeroing the Chronograph hand

- Activate pushers A and B for 2 seconds at the same time  
(Chrono seconds hand rotates once)
- Pusher A → to correct chrono seconds hand
- Pusher B → to jump to hour hand
- Pusher A → to correct hand position
- Pusher B → to jump to minute hand
- Pusher A → to correct hand position



## General Instructions

*Removing the setting stem can only be effected in Pos. I.*

*The use of supporting screws is essential when mounting the hands.*

*Permitted hand setting strengths:*

*Hr / min. hands: <40N*

*Other hands: <30N*

*During quick date correction (setting stem in position II), a date switching speed of 5 d/s must not be exceeded.*

## Weekday setting tip

*In order to avoid damage, the weekday disc should only be set with the setting stem in position III.*

You have decided to buy a watch, which was assembled by a watch-maker using a Ronda movement. Please note that no watches are produced or distributed under the Ronda Brand.

In case of repairs, guarantee claims and questions concerning the functioning of a watch, purchasers and consumers should contact their retailer or the watch manufacturer, for which the relevant information can be found in the sales or guarantee documentation provided with the watch.

**Description of the display and control buttons**

**Display elements 5050.C**

Second hand  
Minute hand  
Weekday  
Hour hand  
Minute counter  
Hour counter  
Second counter  
1/2 second counter (running for the first 30 sec.)  
Date  
Control buttons  
Push-button A & B  
Crown

**Display elements 5051.C**

Second hand  
Date  
Minute hand  
Hour hand  
Minute counter  
Hour counter  
Second counter  
Weekday  
1/2 second counter (running for the first 30 sec.)  
Control buttons  
Push-button A & B  
Crown

**Setting the time**

- 1 Pull out the crown to position III (the watch stops).
- 2 Turn the crown until you reach the correct time 8:45.
- 3 Push the crown back into position I.

**Please note:**  
\* In order to set the time to the exact second, 1 must be pulled out when the second hand is in position «60». Once the hour and minute hands have been set, 2 must be pushed back into position I at the exact second.

**Setting the date (quick mode)**

- 1 Pull out the crown to position II (the watch continues to run).
- 2 Turn the crown until the correct date 1 appears.
- 3 Push the crown back into position I.

**Please note:**  
During the date changing phase between approx. 9 PM and midnight; the date must be set to the date of the following day.  
An extreme acceleration in setting the date with quick mode can induce a false date indication. The synchronization is re-established by setting the date from 01 till 31 (crown in position II).

**Setting the date, weekday and time**

**Example:**  
– Date / time on the watch: 17 / 01:25  
– Present date / time: 23 / 20:30

- 1 Pull out the crown to position III (the watch stops).
- 2 Turn the crown until yesterday's weekday 17 appears.
- 3 Push the crown to position II.
- 4 Turn the crown until yesterday's date appears 22.
- 5 Pull out the crown to position III (the watch stops).
- 6 Turn the crown until the correct date 23 and weekday 17 appears.
- 7 Continue to turn the crown until the correct time 8:30 PM appears.
- 8 Push the crown back into position I.

**Please note:**  
\* To set your watch to the exact second, please refer to the chapter entitled «setting the time».  
\*\* Please observe the AM/PM clock rhythm.

**Chronograph: Basic function**  
 (Start / Stop / Reset)

**Example:**

- 1 Start: Press push-button A.
- 2 Stop: to stop the timing, press push-button A once more and read the chronograph counters: 4h / 20 min / 38 sec / 1/2 sec
- 3 Zero positioning: Press push-button B. (The chronograph hands will be reset to their zero positions.)

**Chronograph: Accumulated timing**

**Example:**

- 1 Start: (start timing)
- 2 Stop: (e.g. 15 min 5 sec following 1)
- 3 Restart: (timing is resumed)
- 4 Stop: (e.g. 5 min 12 sec following 3) = 20 min 17 sec (The accumulated measured time is shown)
- 5 Reset: The chronograph hands are returned to their zero positions.

**Please note:**  
\* Following 4, the accumulation of the timing can be continued by pressing push-button A (Restart / Stop, Restart / Stop, ...).

**Chronograph: Intermediate or interval timing**

**Example:**

- 1 Start: (start timing)
- 2 Display interval: e.g. 20 minutes 17 seconds (timing continues in the background)
- 3 Making up the measured time: (the chronograph hands are quickly advanced to the ongoing measured time).
- 4 Stop: (Final time is displayed)
- 5 Reset: The chronograph hands are returned to their zero position

**Please note:**  
\* Following 3, further intervals or intermediates can be displayed by pressing push-button B (display interval / make up measured time, ...).

**Adjusting the chronograph hands to zero position**

**Example:**  
One or several chronograph hands are not in their correct zero positions and have to be adjusted (e.g. following a battery change).

- 1 Pull out the crown to position III (all chronograph hands are in their correct or incorrect zero position).
- 2 Keep push-buttons A and B depressed simultaneously for at least 2 seconds (the second counter hand rotates by 360° → corrective mode is activated).

**Adjusting the second counter hand**  
 Single step 1 x short  
 Continuous long


**Adjusting the next hand B**

**Adjusting the 1/2 second counter hand (position 6h)**  
 Single step 1 x short  
 Continuous long


**Adjusting the next hand B**

**Adjusting the minute counter hand and the hour counter hand (mechanical coupled)**  
 Single step 1 x short  
 Continuous long





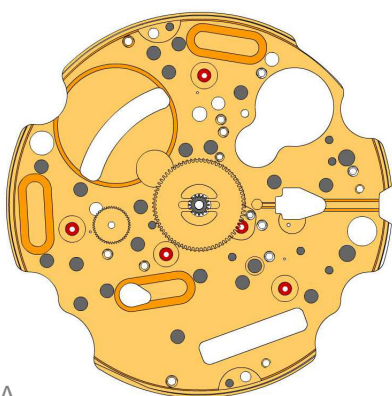



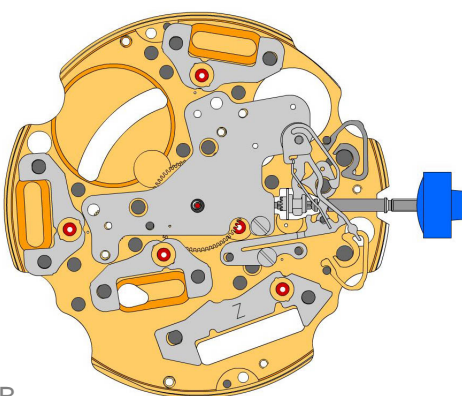









3 Returning the crown to position I  
 Termination of the chronograph hands adjustment (can be carried out at any time).




A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244 3.		Hour wheel (counter 24h)
2030.032.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250. Parts 2030.017.CO, 3402.009.CO, 3004.227 and 3500.075 must be exchanged together.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h, chrono)
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)
4000.250 18.		Screw



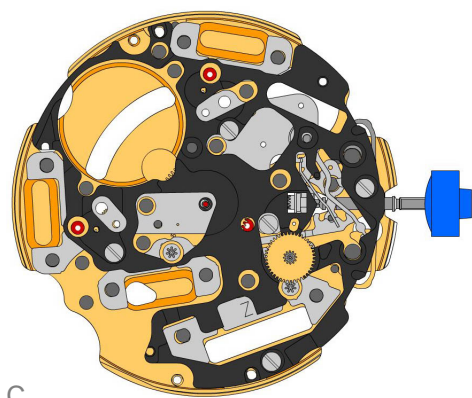

C


3603.079  
19.  Plastic bracket  
Plastic bracket held by 4 screws 4000.250.

4000.250  
20.  Screw

3715.094.RK  
21.  Rotor

3715.094.RK  
22.  Rotor


3147.046.CO  
23.  Intermediate wheel

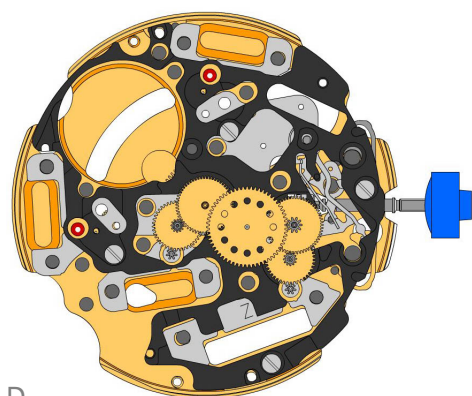


D

3136.142.CO  
24.  Second wheel (long)


3147.047.CO  
25.  Intermediate wheel (chrono)

3136.144.CO  
26.  Chronograph wheel (Aig.2)

3122.056.CO  
27.  Third wheel

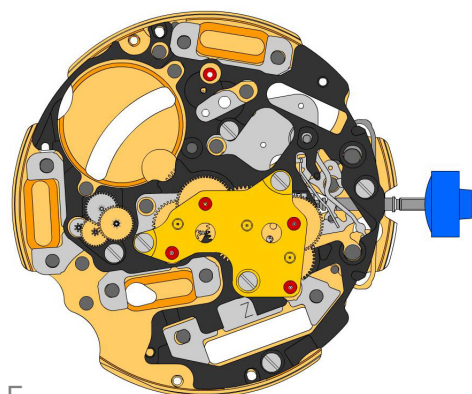

E

2020.148.G  
28.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.


4000.250  
29.  Screw

3715.095.RK  
30.  Rotor

3147.048.CO  
31.  Intermediate wheel (counter)

3007.056.CO  
32.  Minute wheel (counter 24h)

3402.008.CO  
33.  Minute counting wheel

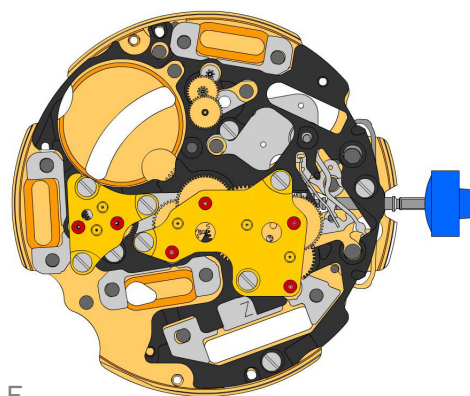

F

2020.149.G  
34.



Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
35.



Screw

3715.095.RK  
36.



Rotor

3147.053.CO  
37.




Intermediate wheel (counter 1/10sec)

3402.009.CO  
38.



Counting wheel 1/10 sec  
Parts 2030.017.CO, 3402.009.CO, 3004.227 and 3500.075 must be exchanged together.

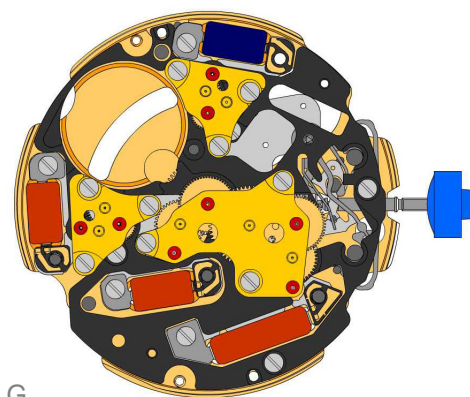

G

2020.149.G  
39.



Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
40.



Screw

3621.053.RK  
41.



Coil  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
42.



Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
43.



Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.055.RK  
44.



Coil (counter 6h)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250  
45.



Screw

3601.118  
46.




Contact strip  
Contact strip held by 1 screw 4000.250.

3603.034  
47.



Battery insulator

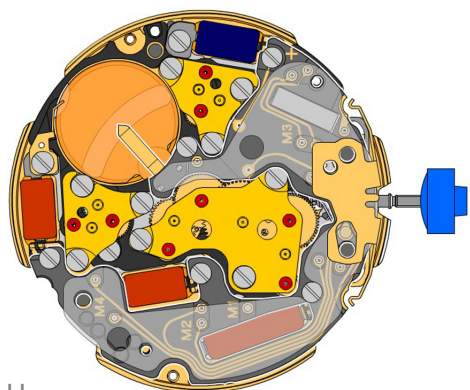

H

3612.144.5050  
48.



Electronic module  
Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.

4000.248  
49.



Screw

3603.069  
50.




Circuit insulator

3601.107.G  
51.



Pusher contact spring



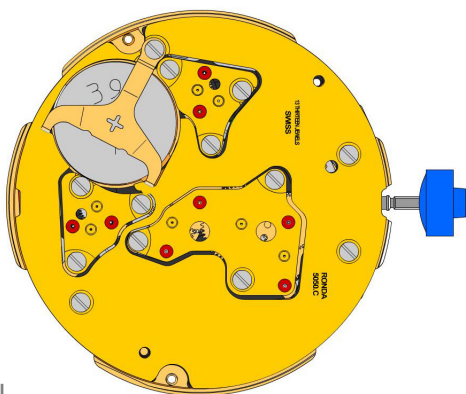

2130.137.G.M01.5050C  
52.



**Electronic module cover**  
Electronic module cover held by 3 screws 4000.250.

3600.010.HGF  
53.



**Battery 395**

3601.109.G  
54.




**Bridge +**  
Bridge held by 1 screw 4000.250.


4000.250  
55.






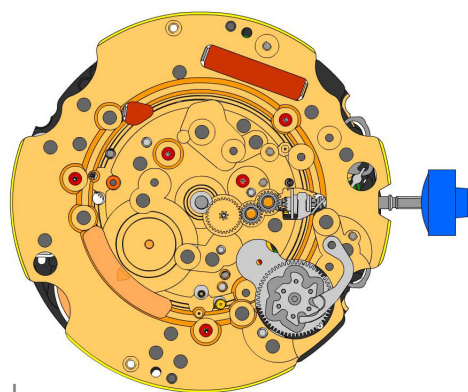



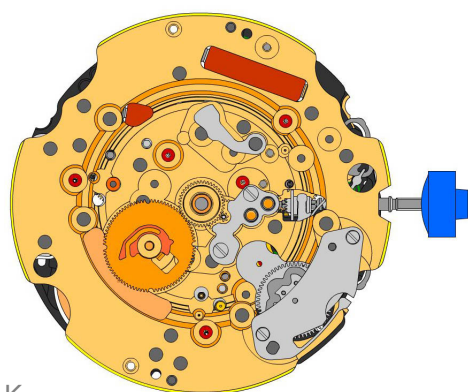






**Screw**




J




K


2000.574.G 56.		Main plate
3004.164 57.		Setting wheel
3004.164 58.		Setting wheel
3007.054.CO 59.		Minute wheel
2130.143 60.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 61.		Screw
3004.227 62.		Tens indicator driving wheel Parts 2030.017.CO, 3402.009.CO, 3004.227 and 3500.075 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 63.		Tens jumper Parts 2030.017.CO, 3402.009.CO, 3004.227 and 3500.075 must be exchanged together.
2130.142 64.		Tens jumper maintaining plate Tensioning the spring arm. Tens jumper maintaining plate held by 2 screws 4000.306.
4010.306 65.		Screw
3301.242 66.		Hour wheel (Aig.2)
3315.016 67.		Friction spring
3004.224.CO 68.		Date indicator driving wheel
3500.049 69.		Date jumper

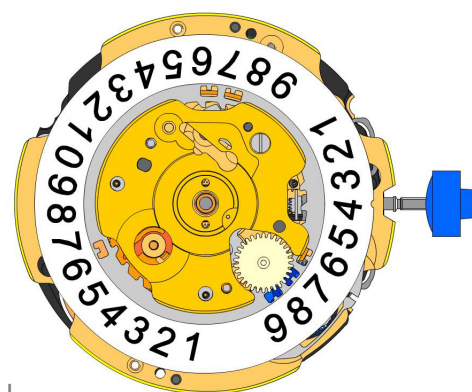

L

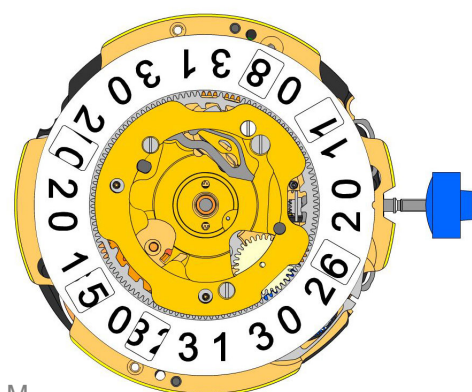

M

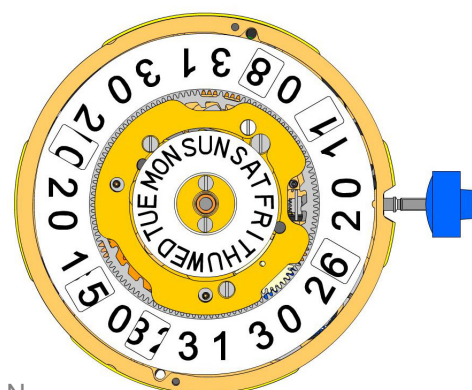

N

3504.214.AD.1.A  
70. Units indicator (standard)  
Nick of the indicator at 3 o'clock.



3147.054  
71. Tens intermediate wheel



2130.163  
72. Date indicator maintaining plate  
Date indicator maintaining plate held by 1 screw 4000.282.



3905.070  
73. Date jumper spring  
Insert the date jumper spring in the provided opening.



3504.215.AD.1.A  
74. Tens indicator (standard)  
Nick of the indicator at 3 o'clock.



3500.055  
75. Day jumper  
Tensioning the spring arm.



3004.175  
76. Day finger  
Place Day finger as shown on graphic.



2130.162.G  
77. Date mechanism maintaining plate  
Date mechanism maintaining plate held by 2 screws 4000.312 and 1 screw 4000.300.



3508.155.AF.E.A  
78. Day indicator (standard)



2130.164.G  
79. Day indicator maintaining plate  
Day indicator maintaining plate held by 2 screws 4000.311.



4000.311  
80. Screw



3506.072.G  
81. Dial support



4000.282  
82. Screw







4000.300  
83. Screw




4000.312  
84. Screw



8200 85.		Moebius 8200
9014 86.		Moebius 9014
124 87.		Jismaa 124
9020 88.		Moebius 9020




Battery	<b>395</b>
Voltage	<b>1.55 V</b>

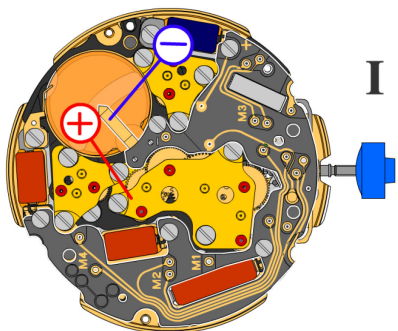


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.32 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.20 V</b>

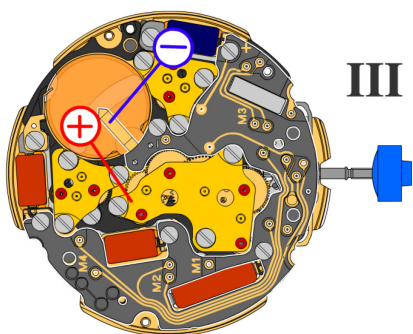



*Setting stem in position III, 60 s measuring interval:*

Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

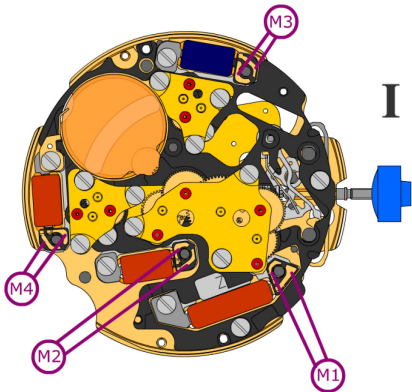

Coil resistance M1 **1.90 k $\Omega$  .. 2.10 k $\Omega$** 

Coil resistance M2 **1.68 k $\Omega$  .. 1.88 k $\Omega$** 


Coil resistance M3 **1.68 k $\Omega$  .. 1.88 k $\Omega$** 

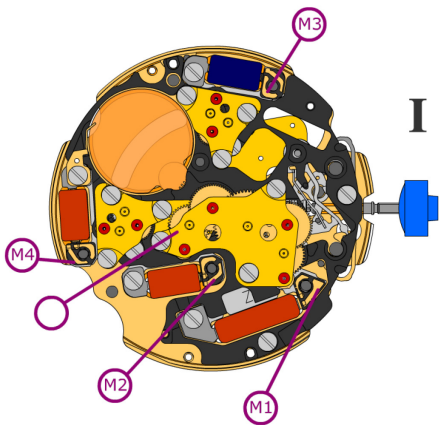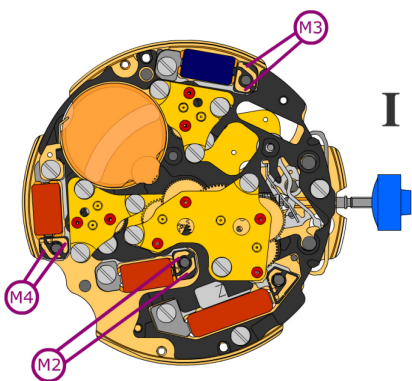Coil resistance M4 **1.68 k $\Omega$  .. 1.88 k $\Omega$** 

Coil isolation M1/M2/M3/M4  **$\infty$  k $\Omega$** 

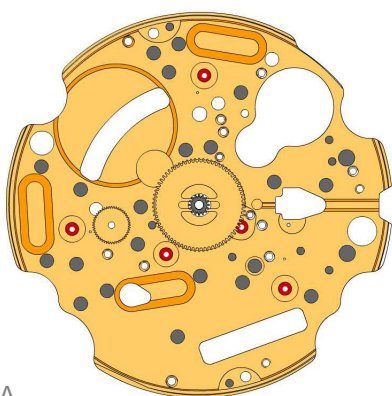*Signal generator (4.9 ms, 8 Hz):*





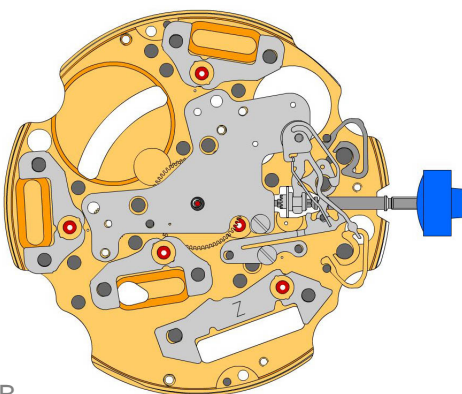













Lower working voltage limit  
M2/M3/M4 **1.20 V**




A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244 3.		Hour wheel (counter 24h)
2030.032.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h, chrono)
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)
4000.250 18.		Screw



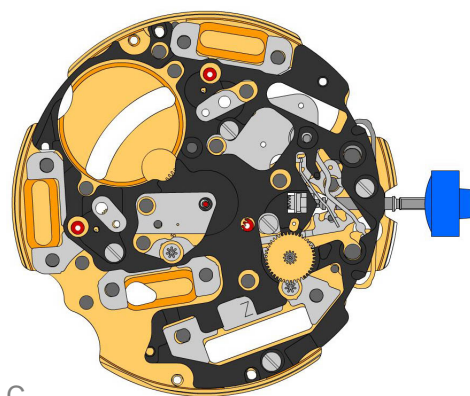

C


3603.079  
19.  Plastic bracket  
Plastic bracket held by 4 screws 4000.250.

4000.250  
20.  Screw

3715.094.RK  
21.  Rotor


3715.094.RK  
22.  Rotor


3147.046.CO  
23.  Intermediate wheel

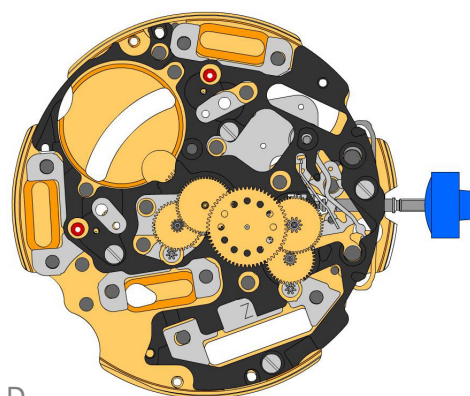


D

3136.142.CO  
24.  Second wheel (long)


3147.047.CO  
25.  Intermediate wheel (chrono)

3136.144.CO  
26.  Chronograph wheel (Aig.2)

3122.056.CO  
27.  Third wheel

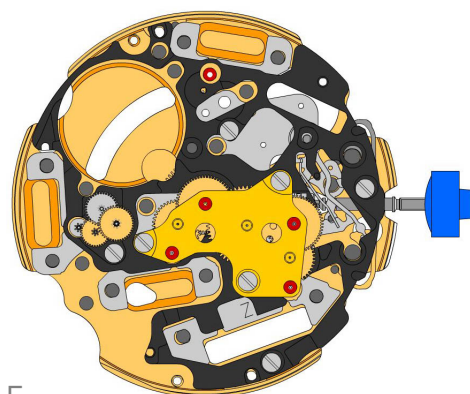

E


2020.148.G  
28.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.

4000.250  
29.  Screw


3715.095.RK  
30.  Rotor

3147.048.CO  
31.  Intermediate wheel (counter)






3007.056.CO  
32.  Minute wheel (counter 24h)

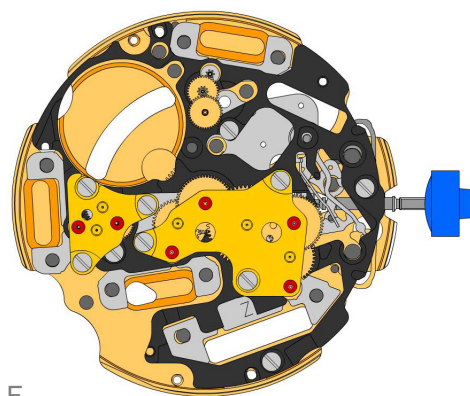
3402.008.CO  
33.  Minute counting wheel









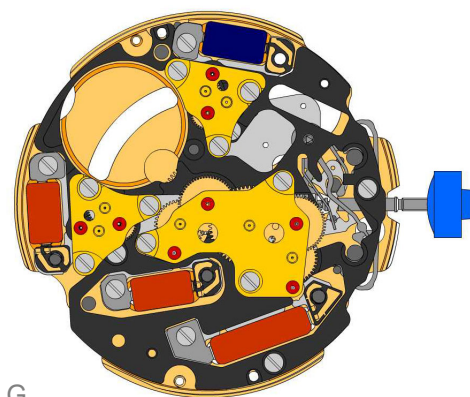




F

2020.149.G 34.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 35.		Screw
3715.095.RK 36.		Rotor
3147.053.CO 37.		Intermediate wheel (counter 1/10sec)
3402.016.CO 38.		Counting wheel 1/10 sec





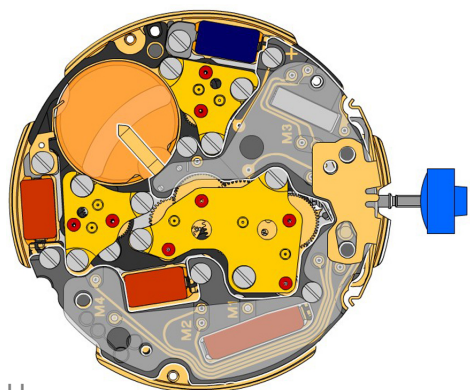


G

2020.149.G 39.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 40.		Screw
3621.053.RK 41.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 42.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 43.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.055.RK 44.		Coil (counter 6h) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
4000.250 45.		Screw
3601.118 46.		Contact strip Contact strip tenue par 1 vis 4000.
3603.034 47.		Battery insulator Contact strip held by 1 screw 4000.250.



H

3612.144.5050 48.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 49.		Screw
3603.069 50.		Circuit insulator
3601.107.G 51.		Pusher contact spring

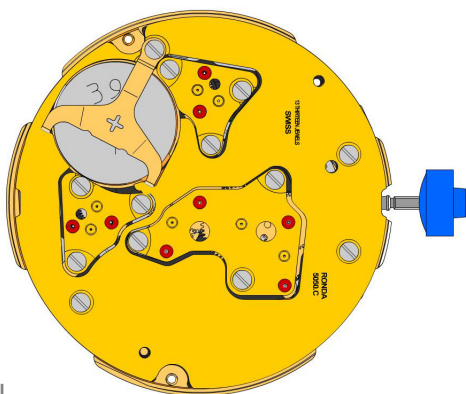

2130.137.G.M01.5050C  
52.



**Electronic module cover**  
Electronic module cover held by 3 screws 4000.250.

3600.010.HGF  
53.



**Battery 395**

3601.109.G  
54.




**Bridge +**  
Bridge held by 1 screw 4000.250.


4000.250  
55.






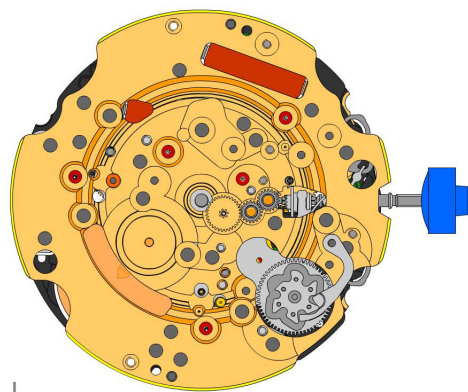



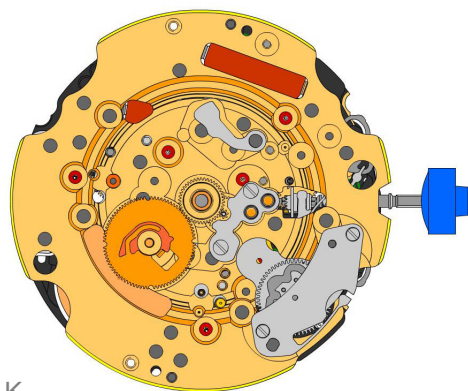






**Screw**




J




K


2000.574.G 56.		Main plate
3004.164 57.		Setting wheel
3004.164 58.		Setting wheel
3007.054.CO 59.		Minute wheel
2130.143 60.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 61.		Screw
3004.227 62.		Tens indicator driving wheel Parts 3004.227 and 3500.75 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 63.		Tens jumper Parts 3004.227 and 3500.75 must be exchanged together.
2130.142 64.		Tens jumper maintaining plate Tensioning the spring arm. Tens jumper maintaining plate held by 2 screws 4000.306.
4010.306 65.		Screw
3301.242 66.		Hour wheel (Aig.2)
3315.016 67.		Friction spring
3004.224.CO 68.		Date indicator driving wheel
3500.049 69.		Date jumper

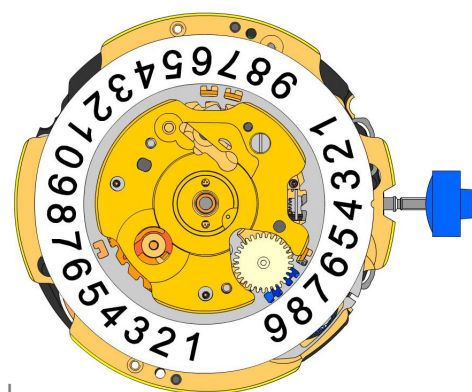

L

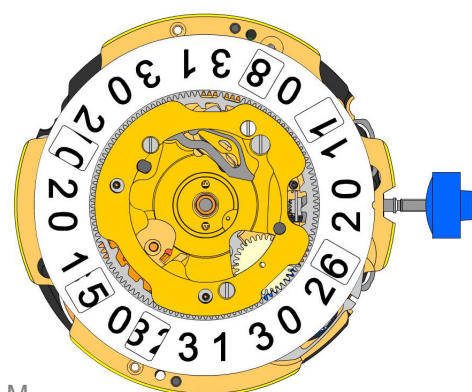

M

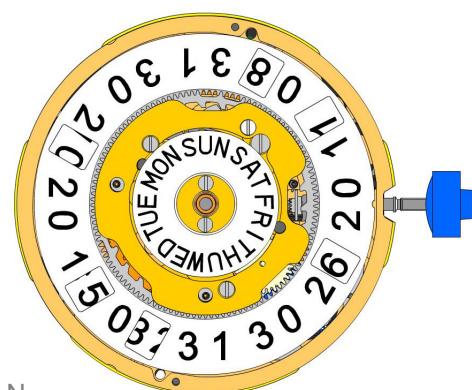

N

3504.214.AD.1.A  
70. Units indicator (standard)  
Nick of the indicator at 3 o'clock.



3147.054  
71. Tens intermediate wheel



2130.163  
72. Date indicator maintaining plate  
Date indicator maintaining plate held by 1 screw 4000.282.



3905.070  
73. Date jumper spring  
Insert the date jumper spring in the provided opening.



3504.215.AD.1.A  
74. Tens indicator (standard)  
Nick of the indicator at 3 o'clock.



3500.055  
75. Day jumper



3004.175  
76. Day finger  
Place Day finger as shown on graphic.



2130.162.G  
77. Date mechanism maintaining plate  
Date mechanism maintaining plate held by 2 screws 4000.312 and 1 screw 4000.300.



3508.155.AF.E.A  
78. Day indicator (standard)



2130.164.G  
79. Day indicator maintaining plate  
Day indicator maintaining plate held by 2 screws 4000.311.



4000.311  
80. Screw



3506.072.G  
81. Dial support



4000.282  
82. Screw








4000.300  
83. Screw




4000.312  
84. Screw



8200 85.		Moebius 8200
9014 86.		Moebius 9014
124 87.		Jismaa 124
9020 88.		Moebius 9020

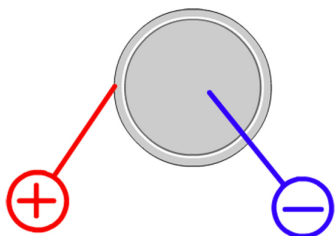


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

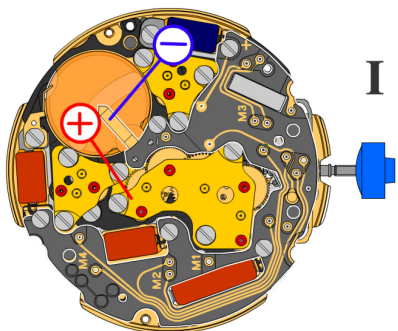

*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*


Typical consumption	<b>1.32 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.20 V</b>

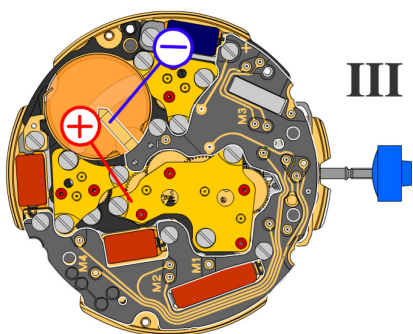

*Setting stem in position III, 60 s measuring interval:*



Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

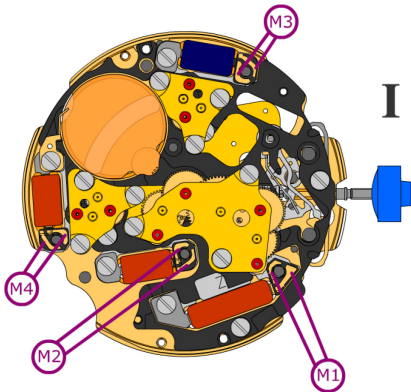


Coil resistance M1 **1.90 k $\Omega$  .. 2.10 k $\Omega$** 

Coil resistance M2 **1.68 k $\Omega$  .. 1.88 k $\Omega$** 

Coil resistance M3 **1.68 k $\Omega$  .. 1.88 k $\Omega$** 

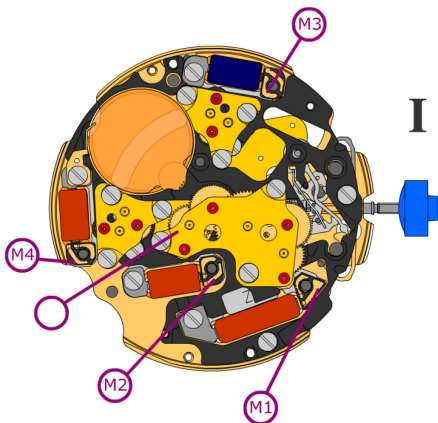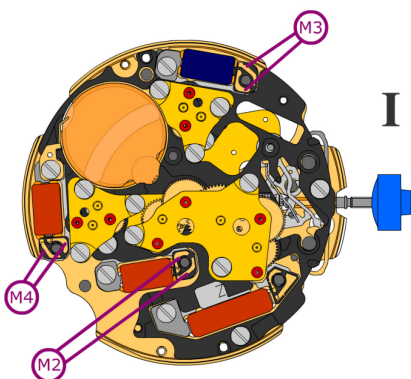Coil resistance M4 **1.68 k $\Omega$  .. 1.88 k $\Omega$** 

Coil isolation M1/M2/M3/M4  **$\infty$  k $\Omega$** 

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit  
M2/M3/M4 **1.20 V**