









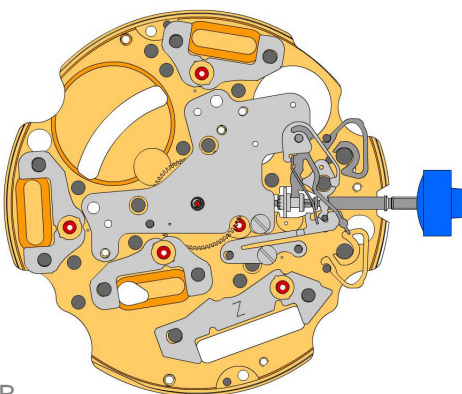
















A

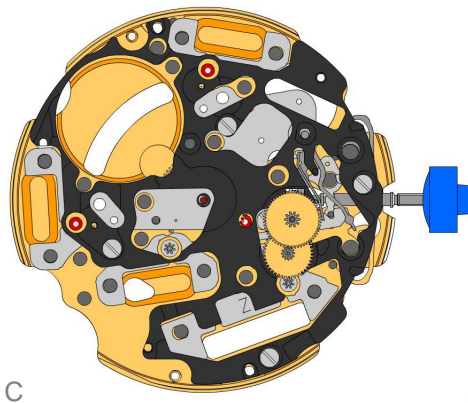





B


2000.576.G 1.		Main plate
3305.287.CO 2.		Cannon pinion with driver (Aig.3)
2030.017.CO 3.		Centre bridge Centre bridge held by 1 screw 4000.250. Parts 2030.017.CO and 3402.009.CO must be exchanged together.
4000.250 4.		Screw
3001.045 5.		Sliding pinion
3000.177.CO 6.		Setting stem
3017.049 7.		Setting lever
3905.053 8.		Setting lever jumper (2 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 9.		Screw
3015.080 10.		Yoke (2 positions)
3905.067 11.		Yoke spring
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h, chrono)
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)



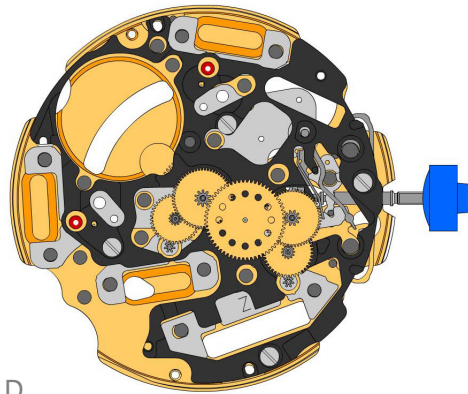



C

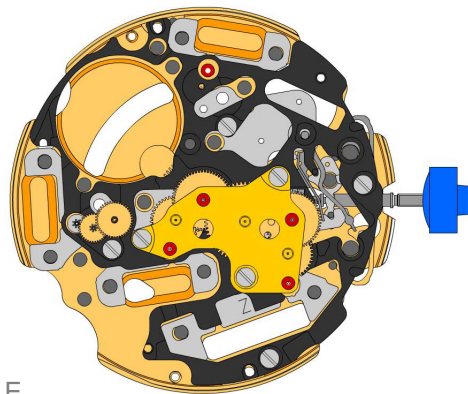
3603.079 18.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
4000.250 19.		Screw
3715.094.RK 20.		Rotor
3715.094.RK 21.		Rotor
3147.046.CO 22.		Intermediate wheel
3136.142.CO 23.		Second wheel (long)


D






3147.047.CO 24.		Intermediate wheel (chrono)
3136.150.CO 25.		Chronograph wheel (Aig.3)
3122.056.CO 26.		Third wheel

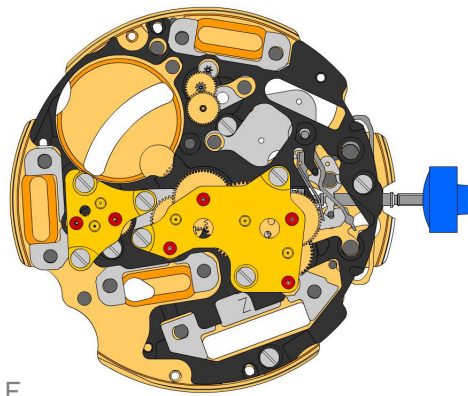

E

2020.148.G 27.		Train wheel bridge Train wheel bridge held by 3 screws 4000.250.
4000.250 28.		Screw
3715.095.RK 29.		Rotor
3147.048.CO 30.		Intermediate wheel (counter)
3402.006.CO 31.		Minute counting wheel







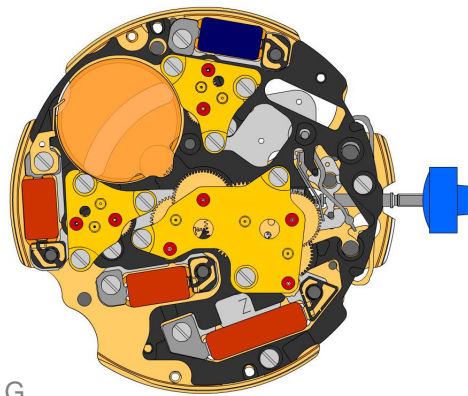






F

2020.149.G 32.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 33.		Screw
3715.095.RK 34.		Rotor
3147.053.CO 35.		Intermediate wheel (counter 1/10sec)
3402.009.CO 36.		Counting wheel 1/10 sec Parts 2030.017.CO and 3402.009.CO must be exchanged together.





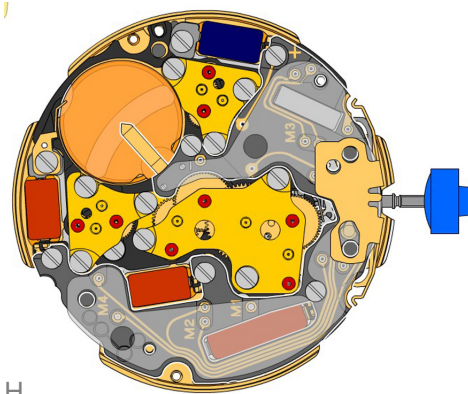


G





2020.149.G 37.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 38.		Screw
3621.053.RK 39.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 40.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 41.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.055.RK 42.		Coil (counter 6h) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
4000.250 43.		Screw
3601.118 44.		Contact strip Contact strip held by 1 screw 4000.250.
4000.250 45.		Screw
3603.034 46.		Battery insulator




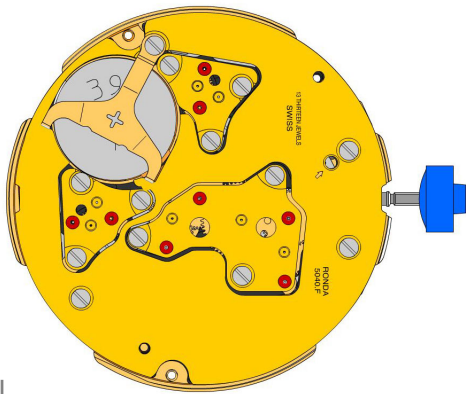



H


3612.144.5040 47.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 48.		Screw
3603.069 49.		Circuit insulator
3601.107.G 50.		Pusher contact spring



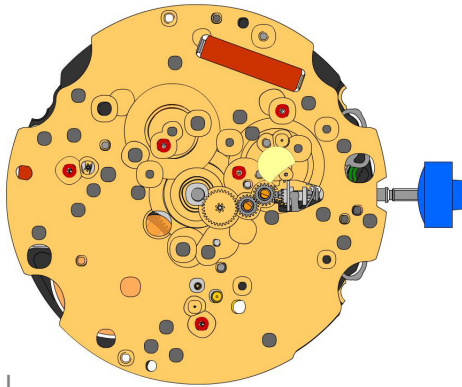




2130.137.G.M01.5040F 51.		Electronic module cover Electronic module cover held by 3 screws 4000.250.
3600.010.HGF 52.		Battery 395
3601.109.G 53.		Bridge + Bridle held by 1 screw 4000.250.
4000.250 54.		Screw

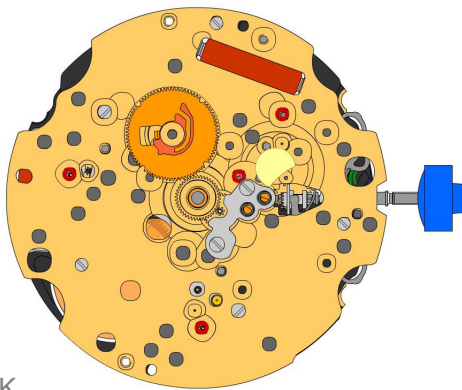



J



2000.576.G 55.		Main plate
3004.164 56.		Setting wheel
3004.164 57.		Setting wheel
3007.078.CO 58.		Minute wheel

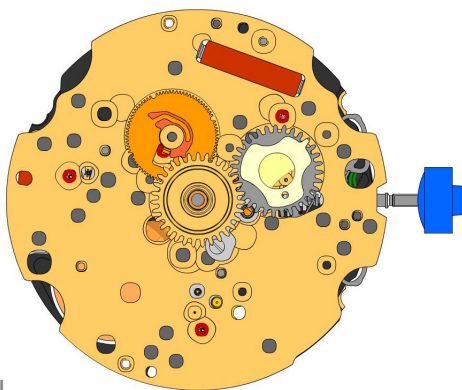







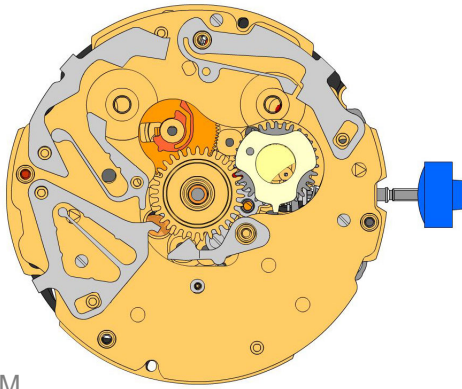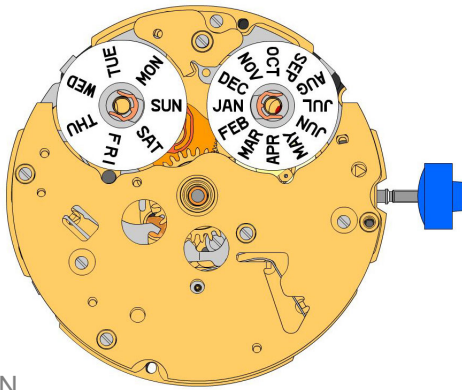








K





2130.177 59.		Minute train bridge Minute train bridge held by 4 screws 4000.319.
4000.319 60.		Screw
3301.247 61.		Hour wheel (Aig.3)
3004.171.CO 62.		Date indicator driving wheel



L

3004.173 63.		Month driving wheel
3004.174 64.		Month finger Ridges at the bottom side from the month meshed in both gaps of the month driving wheel.
3301.248 65.		Date indicator wheel



M

N

2130.155.CO 66.		Date platform Date platform held by 3 screws 4000.282.
4000.282 67.		Screw
3507.054 68.		Month corrector
3507.055 69.		Day corrector
3507.056 70.		Date corrector
3500.053 71.		Day jumper
3500.065 72.		Date jumper
2130.157.G 73.		Combined maintaining plate Combined maintaining plate held by 4 screws 4000.286.
4000.286 74.		Screw
2130.166.G 75.		Corrector maintaining plate Corrector maintaining plate held by 1 screw 4000.286.
4000.286 76.		Screw
3905.059 77.		Date jumper spring Insert the date jumper spring in the provided opening.
3508.153.AA.E.A 78.		Day indicator (standard)
3508.154.AE.E.A 79.		Month indicator (standard)
3909.028 80.		Pillar spring clip
3909.028 81.		Pillar spring clip

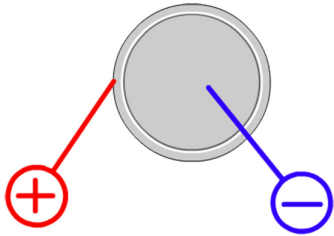8200 82.		Moebius 8200
9014 83.		Moebius 9014
124 84.		Jismaa 124
9020 85.		Moebius 9020

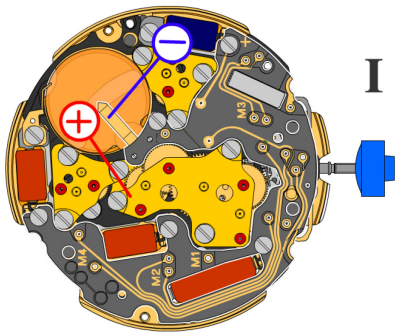


Battery	395
Voltage	1.55 V




*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.32 μA
Maximal consumption	1.65 μA
Rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

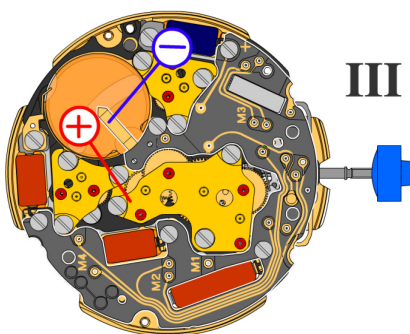

Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

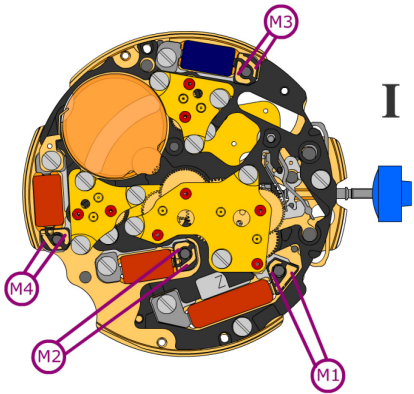


Coil resistance M1 **1.90 k Ω .. 2.10 k Ω**


Coil resistance M2 **1.68 k Ω .. 1.88 k Ω**

Coil resistance M3 **1.68 k Ω .. 1.88 k Ω**

Coil resistance M4 **1.68 k Ω .. 1.88 k Ω**

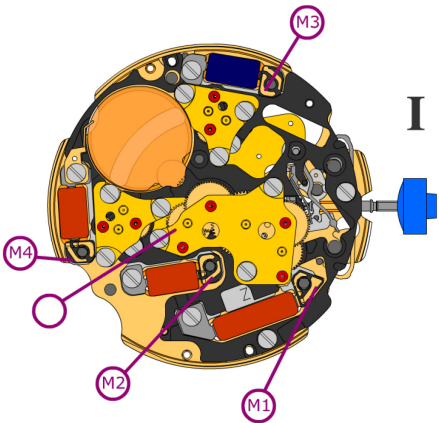

Coil isolation M1/M2/M3/M4 **∞ k Ω**

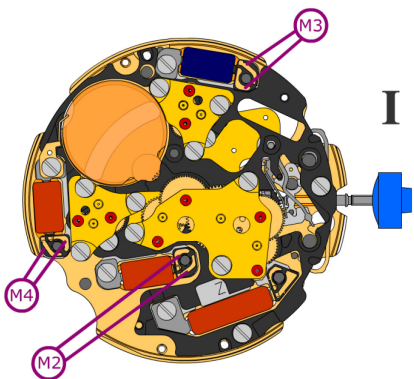

Signal generator (4.9 ms, 8 Hz):

Lower working voltage limit
M2/M3/M4 **1.20 V**