









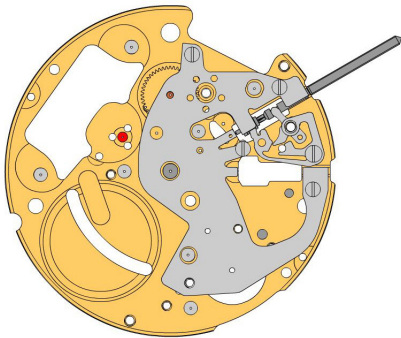

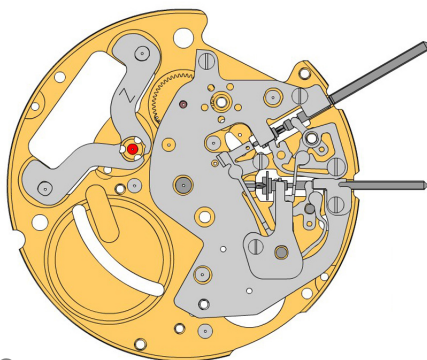








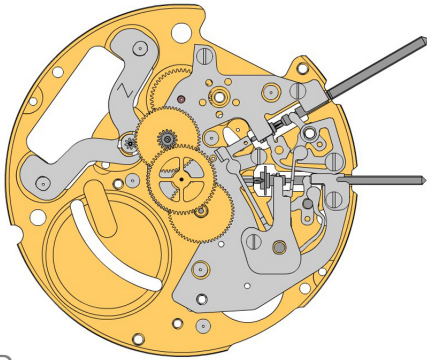





A

B

C


2000.627.G 1.		Main plate
3017.052 2.		Setting lever dual
3015.075 3.		Yoke dual Yoke dual held by 1 screw 4000.282.
4000.282 4.		Screw
3001.044 5.		Sliding pinion
3000.190.CO 6.		Handsetting stem dual
3315.018 7.		Friction spring
3301.277 8.		Hour wheel dual (Aig.1)





2130.167.CO 9.		Setting mechanism cover Setting mechanism cover tenue par 3 vis 4000.321. Parts 2130.167.CO and 3004.188 must be exchanged together.
4000.312 10.		Screw


3017.057 11.		Setting lever
3015.074 12.		Yoke (3 positions) Tensioning the spring arm.
3001.042.FI 13.		Sliding pinion
3000.189.CO 14.		Handsetting stem
2020.166 15.		Yoke bridge Yoke bridge held by 1 screw 4000.328.
4000.328 16.		Screw
2130.199 17.		Stem maintaining plate Stem maintaining plate held by 1 screw 4000.312.
4000.312 18.		Screw
3622.042 19.		Stator Mark Z on stator.



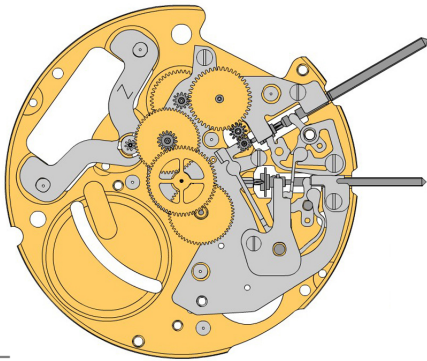



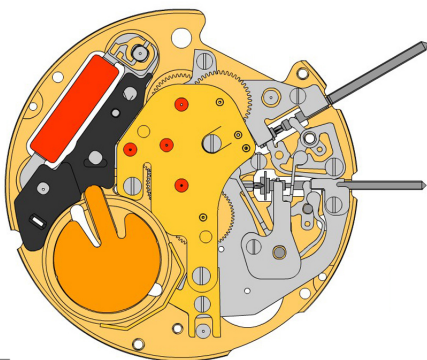

D


3715.103.RK 20.		Rotor
3147.056.CO 21.		Intermediate wheel
3122.059.CO 22.		Third wheel
3136.162.CO 23.		Center second wheel (Aig.1)


E


3305.313.FI 24.		Cannon pinion dual (Aig.1)
3004.185.CO 25.		Intermediate setting wheel dual
3004.198.FI 26.		Setting wheel dual
3007.074.CO 27.		Minute wheel dual


F

2020.180.G 28.		Train wheel bridge Train wheel bridge held by 3 screws 4000.279.
4000.279 29.		Screw
3601.117.G 30.		Battery clamp + Lateral bridle held by 1 screw 4000.244.
4000.244 31.		Screw
3621.060.RK 32.		Coil Attention: Please hold the coil only on the grey coil core.
3603.074 33.		Bridle (-) insulator
3603.075 34.		Battery insulator

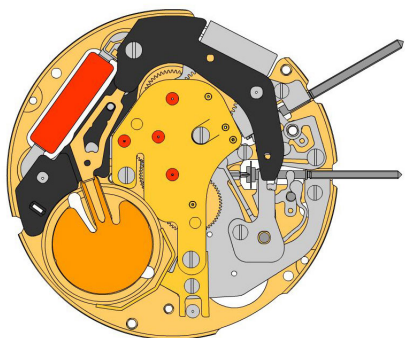

G

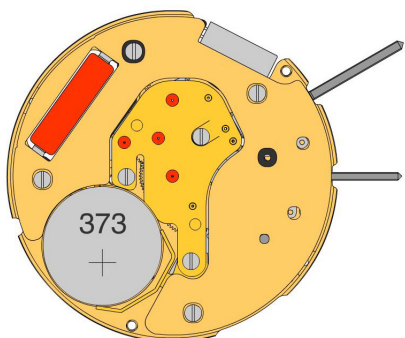

H

3601.116
35.



Bridle -
Place bridle as shown on graphics.

3612.181
36.



Electronic module
Electronic module held by 1 screw 4000.318. Electronic measurements may be realised now.

4000.318
37.



Screw

2130.168.G.M01.6203B
38.



Electronic module cover
Electronic module cover held by 3 screws 4000.102.

4000.102
39.




Screw


3600.031.HGF
40.




Battery 373

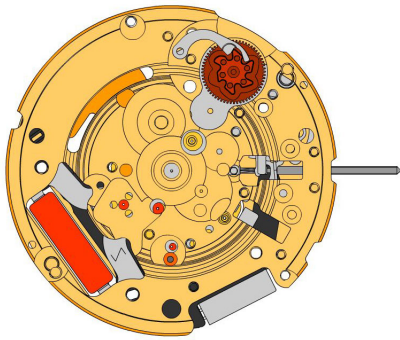

I

2000.627.G
41.  Main plate

3004.188
42.  Tens indicator driving wheel
The short tooth of the tens indicator driving wheel must point to the center of the movement. Parts 2130.167.CO and 3004.188 must be exchanged together.

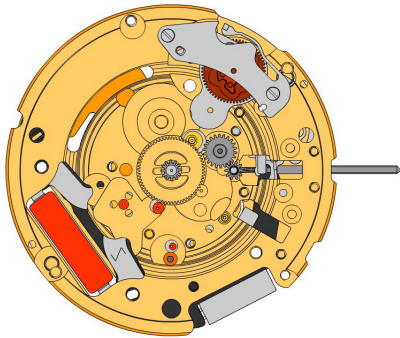3500.060
43.  Tens jumper



J


2130.171
44.  Tens jumper maintaining plate
Tens jumper maintaining plate held by 2 screws 4000.332. Tensioning the spring arm.

4000.332
45.  Screw

3004.182.FI
46.  Setting wheel

3004.183.FI
47.  Intermediate setting wheel

3305.308.CO
48.  Cannon pinion driving wheel (Aig.1)

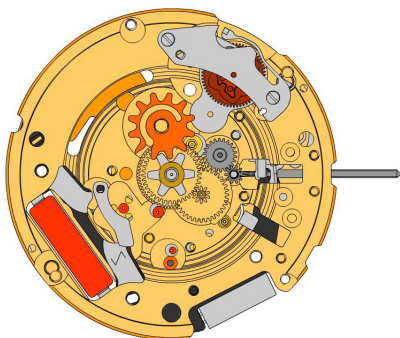
K


3007.081.CO
49.  Minute wheel

3301.273.CO
50.  Hour wheel (Aig.1)

3315.001
51.  Friction spring


3004.187
52.  Date indicator driving wheel


3500.061
53.  Date jumper

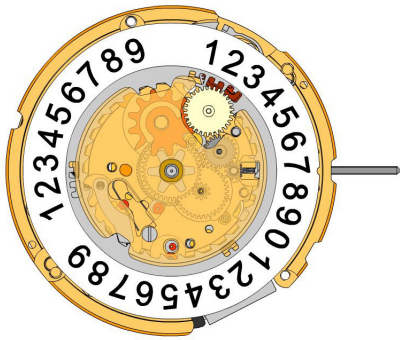


L


3504.217.AF.1.A
54.  Units indicator (standard)
Nick of the indicator at 3 o'clock.

3147.057
55.  Tens intermediate wheel

2130.169
56.  Date indicator maintaining plate
Date indicator maintaining plate held by 1 screw 4000.312.

4000.312
57.  Screw

3905.070
58.  Date jumper spring
Insert the date jumper spring in the provided opening.

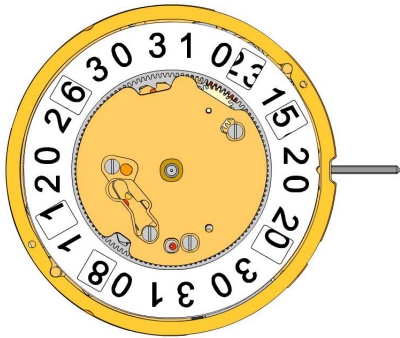

M

3504.218.AF.1.A
59.  Tens indicator (standard)
Nick of the indicator at 3 o'clock.

2130.170.G
60.  Date mechanism maintaining plate
Date mechanism maintaining plate held by 3 screws 4000.312.

4000.312
61.  Screw


3506.075.G
62.  Dial support

8200
63.  Moebius 8200


9014
64.  Moebius 9014

124
65.  Jismaa 124

9020
66.  Moebius 9020

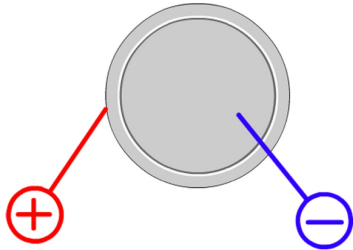


Battery	373
Voltage	1.55 V

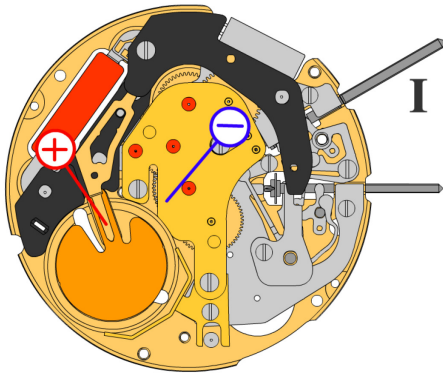


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.03 μA
Maximal consumption	1.85 μA
Instantaneous rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

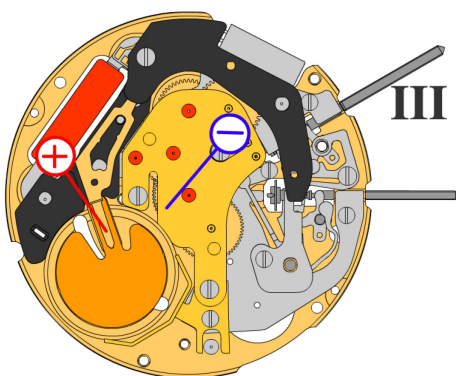


Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

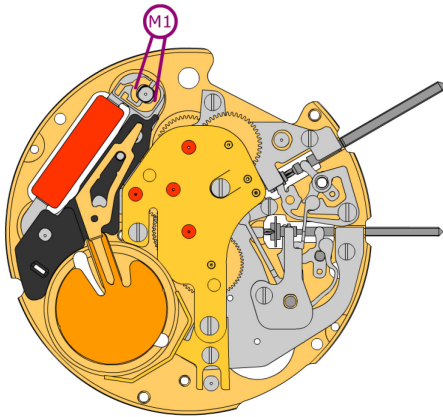

Coil resistance M1

1.61 k Ω .. 1.81 k Ω

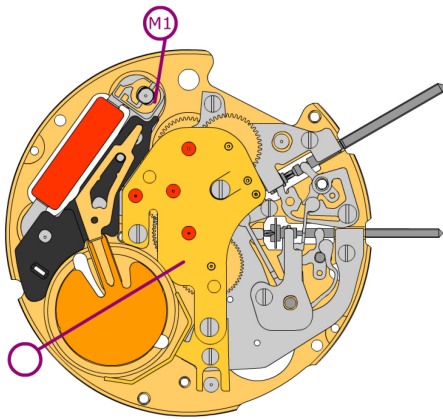

Coil isolation M1

∞ k Ω