







- | | | | |
|---|---|------------------|----------------------|
| 1 |  | 2000.365.SM.G.LC | Main plate |
| 2 |  | 3622.018 | Stator |
| 3 |  | 3305.174.CO | Cannon pinion (Aig.) |
| 4 |  | J124 | Jismaa 124 |



- | | | | |
|---|---|-------------|--------------------|
| 5 |  | 2020.104.CO | Center bridge |
| 6 |  | 4000.141 | Screw |
| 7 |  | 3715.100.RK | Rotor |
| 8 |  | 3147.020.CO | Intermediate wheel |
| 9 |  | 3122.045.CO | Third wheel |



- | | | | |
|----|---|----------------|--------------------|
| 10 |  | 2020.116.G.M25 | Train wheel bridge |
| 11 |  | 4000.141 | Screw |
| 12 |  | 4000.141 | Screw |
| 13 |  | 9014 | Moebius 9014 |




14



9014

Moebius 9014



15



9014

Moebius 9014



16



3621.061.RK

Coil

Attention: Please hold the coil only on the grey coil core.

17



3601.039.G

Battery clamp (+)

18



4000.243

Screw



19




9014

Moebius 9014



20



21



3603.103

Insulator

22



3601.047


Contact strip (-)

23



3612.252


Electronic module




- | | | | |
|----|---|----------------|---------------------------|
| 24 |  | 2130.251.G.M01 | Module cover plate |
| 25 |  | 3601.162.G | Contact spring for pusher |
| 26 |  | 4000.343 | Screw |
| 27 |  | 4000.343 | Screw |




- | | | | |
|----|--|--------------|-----------------------------|
| 28 |  | 3600.018.HGF | Battery 379 (Ø 5.80 x 2.15) |
| 29 |  | 3601.171.G | Battery clamp |
| 30 |  | 4000.375 | Screw |




- | | | | |
|----|---|-------------|-------------------|
| 31 |  | 3007.052.CO | Minute wheel |
| 32 |  | 2130.041 | Plate |
| 33 |  | 4000.169 | Screw |
| 34 |  | 3301.133.TA | Hour wheel (Aig.) |
| 35 |  | 3315.001 | Friction spring |


Measurement

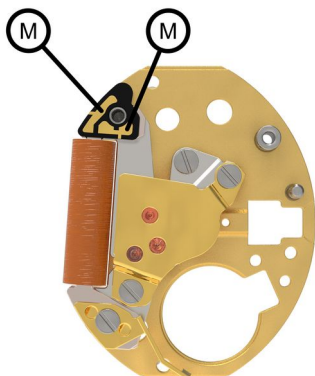


Signal generator (4.9ms, 8Hz)
< 1.20 V

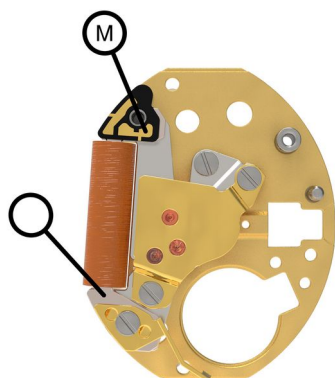

Coil insulation
infinite

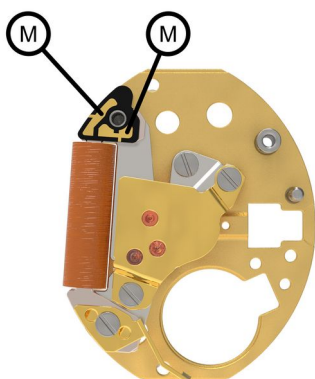


Coil resistance movement
(min./max) 1425 - 1575 Ohm

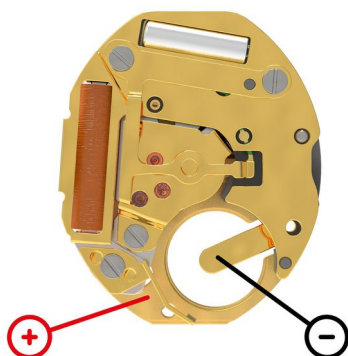

Lower working voltage limit
 $<1.20 \text{ V}$

60s measuring interval
 $-10 \dots +20 \text{ s/mth}$

60s measuring interval
 (typ./max.) $0.34 / 0.40 \mu\text{A}$



Voltage
 typ. 1.5 V