




- | | | | |
|---|---|----------|--------------|
| 1 |  | 2000.708 | Main plate |
| 2 |  | 8200 | Moebius 8200 |



- | | | | |
|---|---|-------------|----------------------|
| 3 |  | 3017.064.CO | Setting lever |
| 4 |  | 3905.083 | Setting lever jumper |
| 5 |  | 4000.342 | Screw |
| 6 |  | 4000.342 | Screw |









- | | | | |
|---|---|------|--------------|
| 7 |  | 8200 | Moebius 8200 |
|---|---|------|--------------|

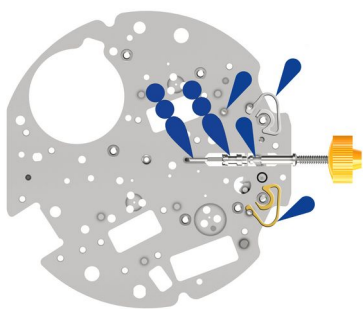

8		3406.043	Pusher jumper A
9		3406.042	Pusher jumper B
10		3000.208.CO	Working stem (dual)
11		3001.072.FI	Sliding pinion
12		8200 / 9020 4x Moebius 8200 / 2x Moebius 9020	Moebius 8200 / Moebius 9020
13		3016.034	Stop lever
14		3603.098	Electronic modul support
15		4000.248	Screw
16		4000.343	Screw
17		3603.099	Battery support
18		3622.070	Stator
19		3622.071	Stator (counter)
20		3715.132.RK	Rotor
21		3715.132.RK	Rotor
22		9014	Moebius 9014





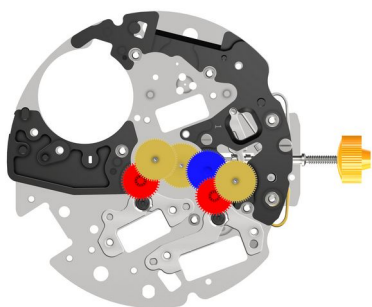



23		3122.073.CO	Third wheel
24		3147.089	Intermediate wheel
25		3136.215.CO	Chronograph wheel (Aig.)
26		3136.214	Second wheel (Aig.)
27		3147.089	Intermediate wheel
28		3136.216.CO	Small second wheel (Aig.)



29		2020.210.M01.Z60	Train wheel bridge
30		4000.248	Screw
31		4000.248	Screw
32		4000.248	Screw
33		9014	Moebius 9014

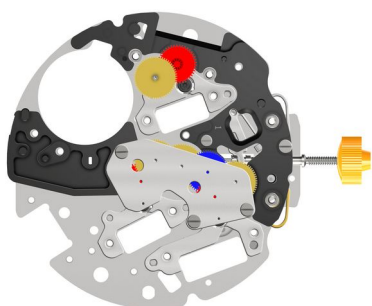

34		3622.071	Stator (counter)
35		3715.132.RK	Rotor
36		3147.089	Intermediate wheel
37		3136.216.CO	Small second wheel (Aig.)

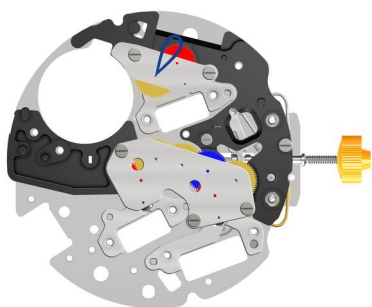


38  2020.211 Counter train wheel bridge

39  4000.248 Screw

40  4000.248 Screw

41  9014 Moebius 9014

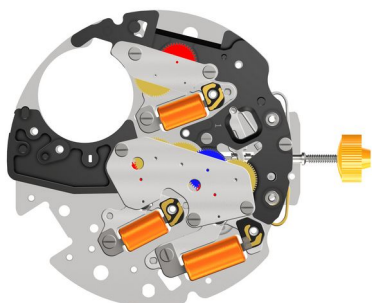

42  3621.099.RK Coil
Attention: Please hold the coil only on the grey coil core.


43  3621.054.RK Coil
Attention: Please hold the coil only on the grey coil core.

44  3621.054.RK Coil
Attention: Please hold the coil only on the grey coil core.

45  4000.248 Screw

46  4000.248 Screw

47  4000.248 Screw

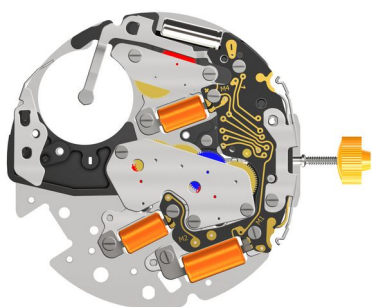

48  3601.153 Bridle -


49  3612.246 Electronic module

50  4000.341 Screw


51  4000.341 Screw

52  4000.341 Screw


53		4000.341	Screw
54		3601.151	Contact spring for pusher
55		4000.248	Screw
56		3601.154	Lateral bridle

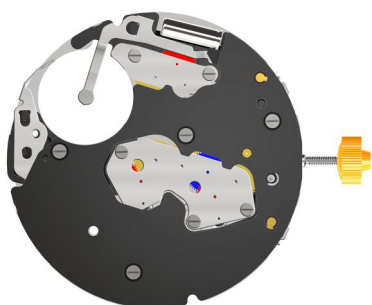

57		2130.230	Electronic module cover
58		4000.248	Screw
59		4000.341	Screw
60		4000.341	Screw
61		4000.341	Screw

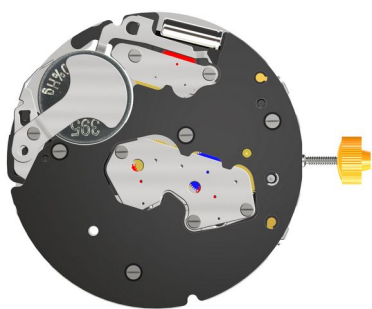

62		3600.010.HGF	Battery 395 (Ø 9.50 x 2.70)
63		3601.152	Bridle +
64		4000.341	Screw

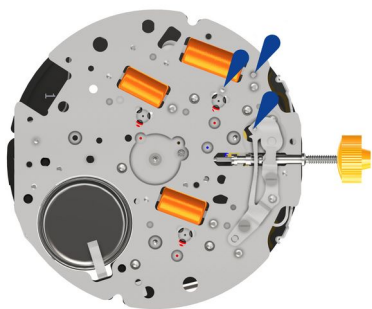


65



8200

Moebius 8200

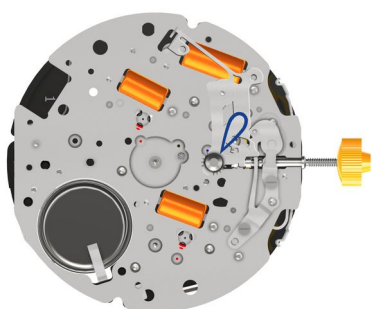

66



3015.095

Yoke

67



3015.096.CO

Setting lever yoke

68



9014

Moebius 9014








69




9020


Moebius 9020

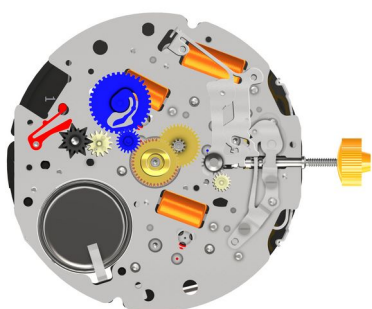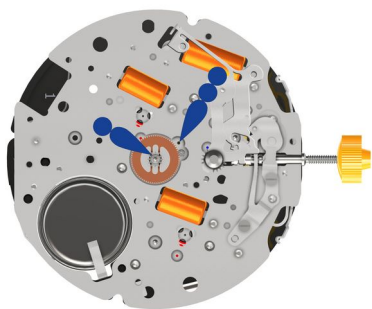


70		3305.370.CO	Cannon pinion (Aig.)
71		J124 / 9020 1x Jismaa 124 / 1x Moebius 9020	Jismaa 124 / Moebius 9020
72		3007.092.CO	Minute wheel
73		3301.332.TA	Hour wheel (Aig.)
74		3315.003	Friction spring
75		3004.264	Date indicator driving wheel
76		3147.091	Intermediate date wheel
77		3004.247	Days driving wheel
78		3401.087.CO	Day wheel
79		3500.082	Day jumper
80		3004.245	Date setting wheel

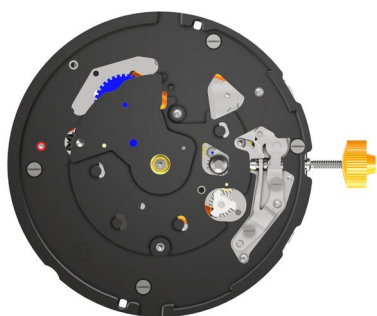


81		2130.231	Setting mechanism cover
82		4000.248	Screw
83		4000.248	Screw
84		4000.248	Screw
85		4000.248	Screw
86		3507.067	Date corrector

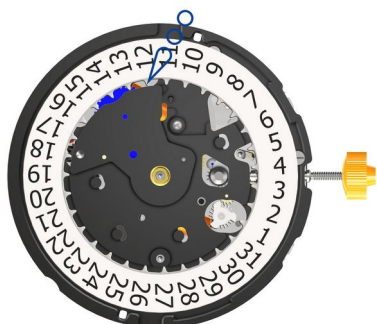

87		3504.243.AB.1.A	Date indicator (T3, G4) Nick of the indicator at 3 o'clock.
88		I-4	Moebius I-4

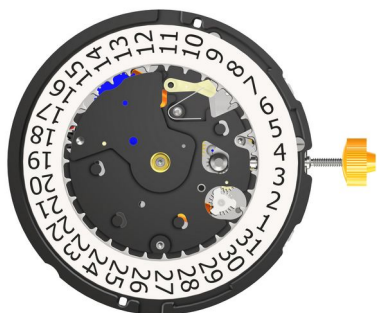


89		3500.081	Date jumper
90		3905.084	Date jumper spring

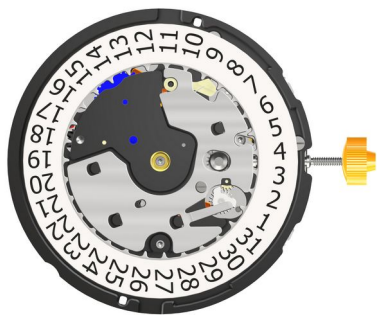


91		2130.229	Date mechanism maintaining plate
92		4000.343	Screw


Measurement

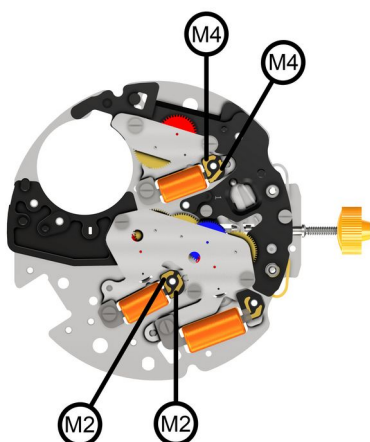

Signal generator (4.9ms, 8Hz)
< 1.20 V

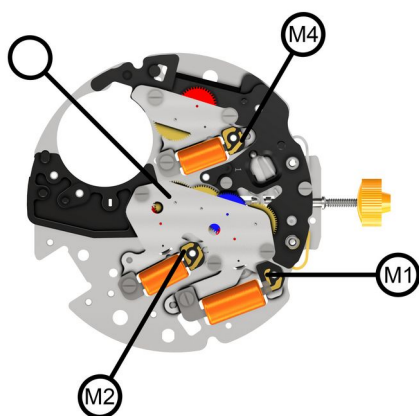


Coil insulation
infinite

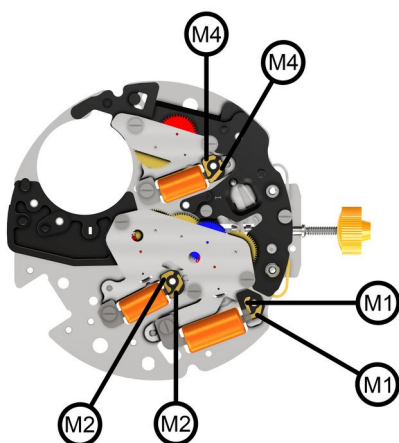


Coil resistance M4
(min./max.) 1680 - 1880 Ohm

Coil resistance M2
(min./max.) 1680 - 1880 Ohm

Coil resistance movement
(min./max.) 1900 - 2100 Ohm

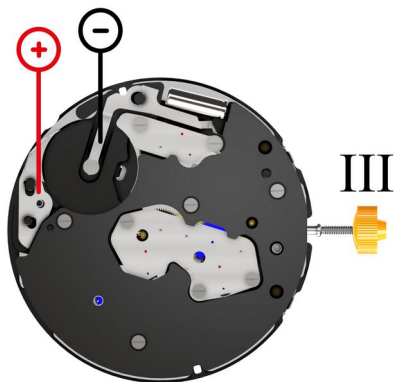

60s measuring interval
(typ./max.) 0.10 / 0.30 μ A

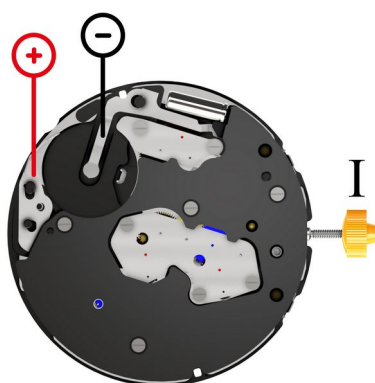

60s measuring interval
-10 .. +20s/mth

Setting stem in position I, calendar not in gear, 60s measuring interval.

(typ./max.) 1.42 / 3 μ A

Untere Funktionsspannungsgrenze
<1.20 V



Voltage
typ 1.5V