





- | | | | |
|---|---|----------|--------------|
| 1 |  | 2000.717 | Main plate |
| 2 |  | 8200 | Moebius 8200 |




- | | | | |
|---|---|-------------|----------------------|
| 3 |  | 3017.064.CO | Setting lever |
| 4 |  | 3905.083 | Setting lever jumper |
| 5 |  | 4000.342 | Screw |
| 6 |  | 4000.342 | Screw |




- | | | | |
|---|---|------|--------------|
| 7 |  | 8200 | Moebius 8200 |
|---|---|------|--------------|

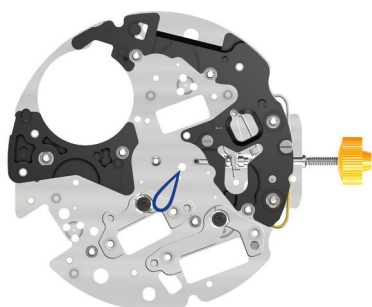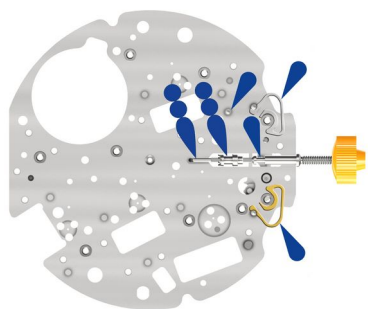


8		3406.043	Pusher jumper A
9		3406.042	Pusher jumper B
10		3000.208.CO	Working stem (dual)
11		3001.072.FI	Sliding pinion
12		8200 / 9020 4x Moebius 8200 / 2x Moebius 9020	Moebius 8200 / Moebius 9020
13		3016.034	Stop lever
14		3603.098	Electronic modul support
15		4000.248	Screw
16		4000.343	Screw
17		3603.101	Battery support
18		3622.070	Stator
19		3622.071	Stator (counter)
20		3715.132.RK	Rotor
21		3715.132.RK	Rotor
22		9014	Moebius 9014

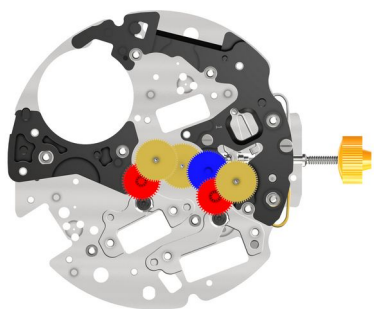


- | | | | | |
|----|---|---|-------------|---------------------------|
| 23 |  |  | 3122.073.CO | Third wheel |
| 24 |  |  | 3147.089 | Intermediate wheel |
| 25 |  |  | 3136.215.CO | Chronograph wheel (Aig.) |
| 26 |  |  | 3136.214 | Second wheel (Aig.) |
| 27 |  |  | 3147.089 | Intermediate wheel |
| 28 |  |  | 3136.216.CO | Small second wheel (Aig.) |

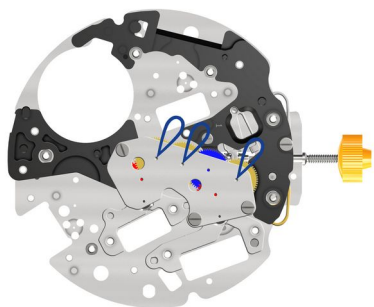



- | | | | | |
|----|---|---|--------------------|-------|
| 29 |  | 2020.210.M01.Z50 | Train wheel bridge | |
| 30 |  |  | 4000.248 | Screw |
| 31 |  |  | 4000.248 | Screw |
| 32 |  |  | 4000.248 | Screw |
| 33 |  | 9014 | Moebius 9014 | |

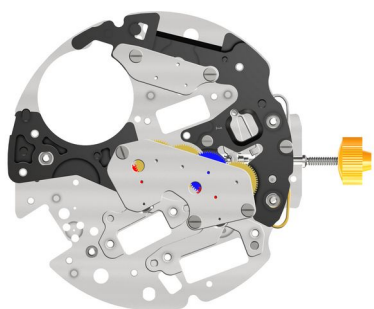


- | | | | | |
|----|---|---|----------------------------|-------|
| 34 |  | 2020.211 | Counter train wheel bridge | |
| 35 |  |  | 4000.248 | Screw |
| 36 |  |  | 4000.248 | Screw |

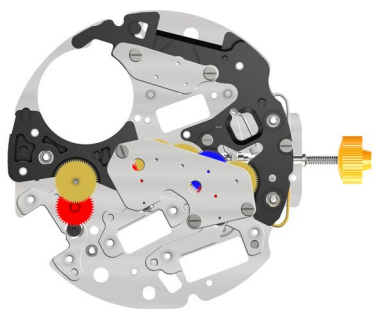


- | | | | |
|----|---|-------------|---------------------------|
| 37 |  | 3622.071 | Stator (counter) |
| 38 |  | 3715.132.RK | Rotor |
| 39 |  | 3147.089 | Intermediate wheel |
| 40 |  | 3136.216.CO | Small second wheel (Aig.) |

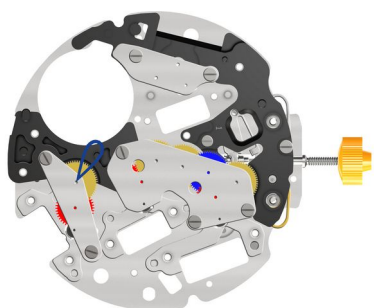


- | | | | |
|----|---|----------|----------------------------|
| 41 |  | 2020.219 | Counter train wheel bridge |
| 42 |  | 4000.248 | Screw |
| 43 |  | 4000.248 | Screw |
| 44 |  | 9014 | Moebius 9014 |

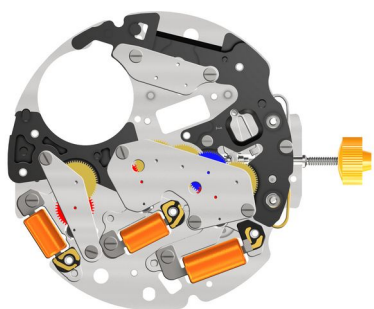

- | | | | |
|----|---|-------------|---|
| 45 |  | 3621.099.RK | Coil
Attention: Please hold the coil only on the grey coil core. |
| 46 |  | 3621.054.RK | Coil
Attention: Please hold the coil only on the grey coil core. |
| 47 |  | 3621.054.RK | Coil
Attention: Please hold the coil only on the grey coil core. |
| 48 |  | 4000.248 | Screw |
| 49 |  | 4000.248 | Screw |
| 50 |  | 4000.248 | Screw |

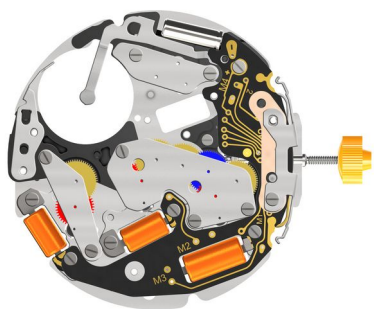


51		3601.153	Bridle -
52		3612.256	Electronic module
53	 1:2	4000.341	Screw
54	 1:2	4000.341	Screw
55	 1:2	4000.341	Screw
56	 1:2	4000.341	Screw
57		3603.102	Circuit insulator
58		3601.151	Contact spring for pusher
59		4000.248	Screw
60		3601.159	Lateral bridle

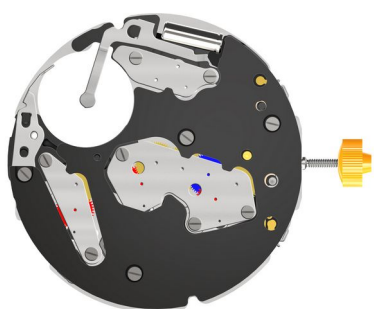


61		2130.248	Electronic module cover
62		4000.248	Screw
63	 1:2	4000.341	Screw
64	 1:2	4000.341	Screw
65	 1:2	4000.341	Screw



- | | | | |
|----|--|--------------|-----------------------------|
| 66 |  | 3600.010.HGF | Battery 395 (Ø 9.50 x 2.70) |
| 67 |  | 3601.152 | Bridle + |
| 68 | 
1:2 | 4000.341 | Screw |

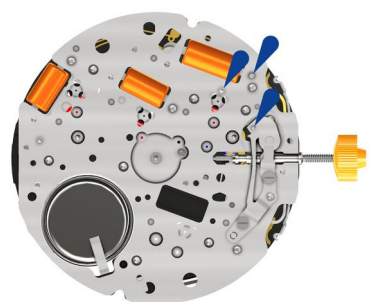

- | | | | |
|----|---|------|--------------|
| 69 |  | 8200 | Moebius 8200 |
|----|---|------|--------------|

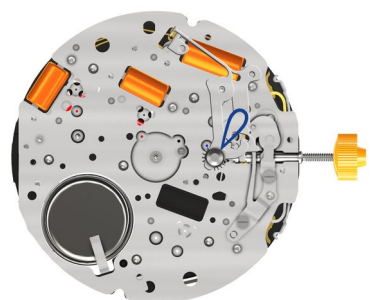

- | | | | |
|----|---|-------------|--------------------|
| 70 |  | 3015.095 | Yoke |
| 71 |  | 3015.096.CO | Setting lever yoke |
| 72 |  | 9014 | Moebius 9014 |




73



9020

Moebius 9020

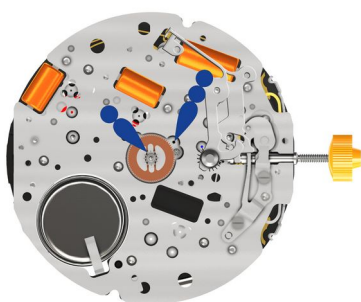

74



3305.370.CO

Cannon pinion (Aig.)


75



J124 / 9020

Jismaa 124 / Moebius 9020

1x Jismaa 124 / 1x Moebius 9020

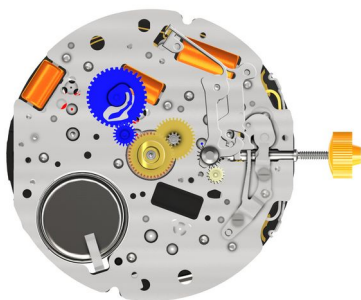

76



3007.092.CO

Minute wheel

77



3301.332.TA

Hour wheel (Aig.)

78



3315.003

Friction spring


79



3004.264

Date indicator driving wheel

80



3147.091


Intermediate date wheel

81




3004.245


Date setting wheel

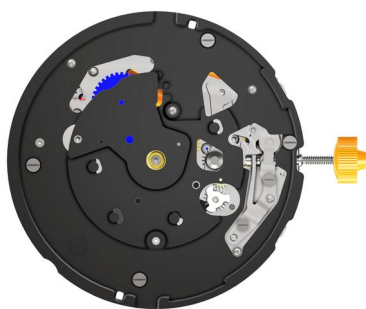


82		2130.231	Setting mechanism cover
83		4000.248	Screw
84		4000.248	Screw
85		4000.248	Screw
86		4000.248	Screw
87		3507.067	Date corrector

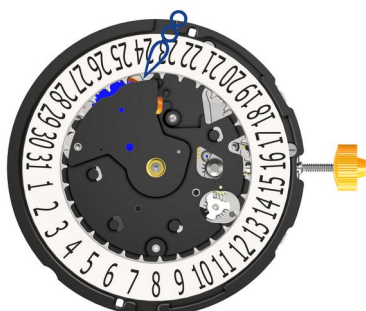

88		3504.2436.AP.3.A	Date indicator Nick of the indicator at 3 o'clock.
89		I-4	Moebius I-4

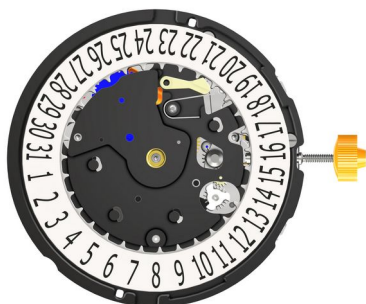


90		3500.081	Date jumper
91		3905.084	Date jumper spring

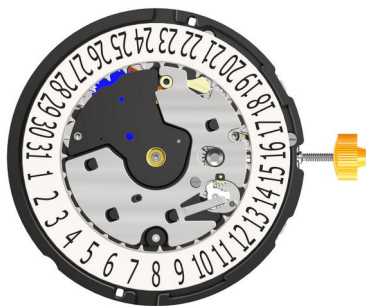


92		2130.229	Date mechanism maintaining plate
93		4000.343	Screw


Measurement

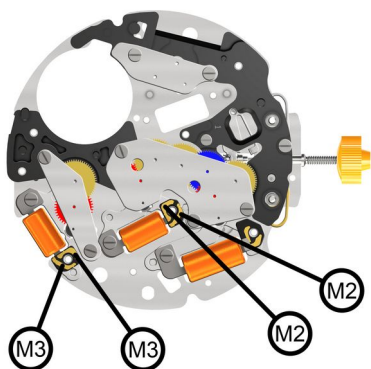

Signal generator (4.9ms, 8Hz)
< 1.20 V

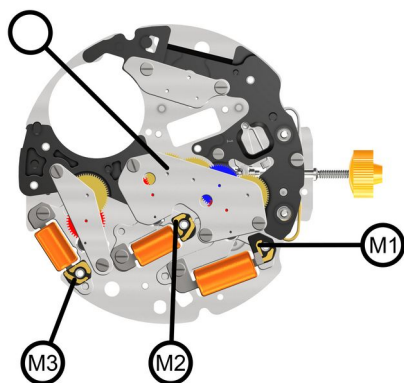


Coil isolation M2 / M3
infinite

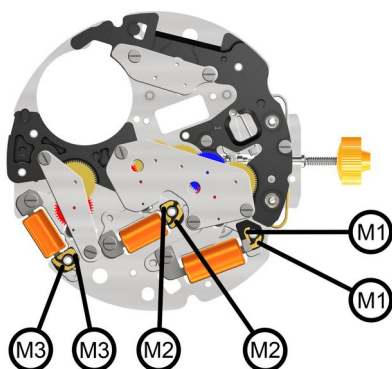


Coil resistance M3
(min./max.) 1680 - 1880 Ohm

Coil resistance M2
(min./max.) 1680 - 1880 Ohm

Coil resistance movement
(min./max.) 1900 - 2100 Ohm

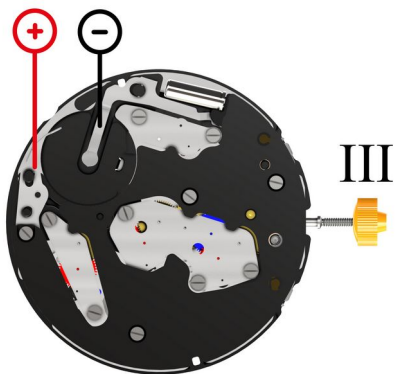

Setting stem in position III, 60 s measuring interval.
(typ./max.) 0.10 / 0.30 μ A

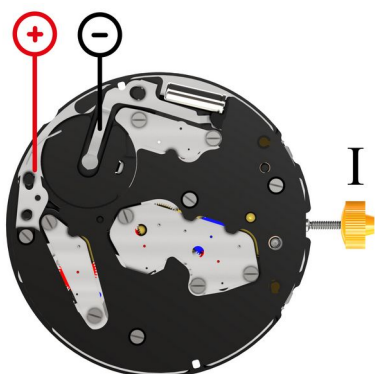

Lower working voltage limit
<1.20 V

60s measuring interval
-10 .. +20s/mth

Setting stem in position I, calendar not in gear, 60s measuring interval.
(typ./max.) 1.42 / 3 μ A



Voltage
typ 1.5V