


## Caliber 8040.B – 15'''

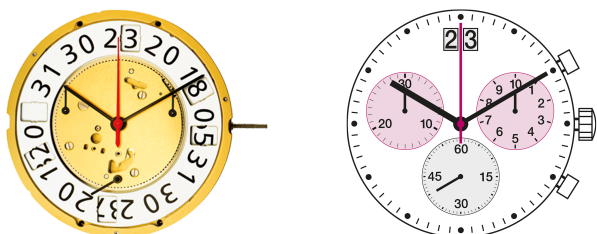

### Product Specifications

Analog quartz movement

Line startech

Caliber 8040.B

Size 15'''

Version Swiss Made 13 Jewels / gold plated

Standard battery life 48 months

Standard hand fitting height 1

### Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem:  
Reduction of consumption approximately 70%
- Very easy handling by two pushers
- Big date with quick change

### Functions

- 30 minute counter
- Center stop second (1/1 sec)
- 10 hour counter
- 1/10 seconds up to 30 minutes
- ADD and SPLIT functions
- Chronograph
- Big date
- Small second

# Quartz Movements

## Chronographs

### RONDA startech

## Caliber 8040.B – 15"

### Technical Specifications

Diameter Total	34.60 mm
Case fitting	33.80 mm
Movement height	5.60 mm
Height over standard battery	5.60 mm
Movement rest	0.60 mm
Height over stem	3.30 mm
Length of stem travel	1.00 mm
Stem thread	0.90 mm
Useful torque second – typical	6 $\mu$ Nm
Useful torque minute – typical	300 $\mu$ Nm
Useful torque center stop second – typical	7 $\mu$ Nm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

### Battery Specifications

Standard battery	No. 395
Standard battery life	48 months
Battery voltage	1.5 V
Current consumption – typical	1.48 $\mu$ A (Date Mechanism not in Gear)
Current consumption – maximum	2 $\mu$ A (Date Mechanism not in Gear)



### Watch production

[Drawing Casing ring \(standard, PDF\)](#)  
[Drawing Dial \(stem 3h, calendar 6h, PDF\)](#)  
[Drawing Dial \(stem 3h, calendar 12h, PDF\)](#)  
[Drawing Hand fitting \(hand height 1, PDF\)](#)  
[Drawing Stem](#)  
[Casing information \(PDF\)](#)

### User's manual

[User's manual \(PDF\)](#)

### Watch repairs

[Technical instruction as of code M \(PDF\)](#)