


Caliber 785 – 8 $\frac{3}{4}$ "

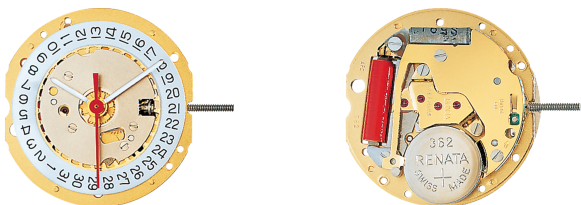

Product Specifications

Analog quartz movement

Line normtech

Caliber 785

Size 8 $\frac{3}{4}$ "

Version Swiss Made 5 Jewels / gold plated EOL

Version Swiss Parts 1 Jewels / nickel plated

Standard battery life 42 months

Standard hand fitting height 1

Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem:
Reduction of consumption approximately 70%
- Many high hand heights available

Functions

- Date
- 3 hands

Caliber 785 – 8³/₄"

Technical Specifications

Diameter Total	20.00 mm
Case fitting	19.40 mm
Movement height	2.50 mm
Height over standard battery	2.75 mm
Movement rest	0.30 mm
Height over stem	1.00 mm
Length of stem travel	0.90 mm
Stem thread	0.90 mm
Useful torque second – typical	7 µNm
Useful torque minute – typical	350 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Battery Specifications

Standard battery	No. 362
Standard battery life	42 months
Battery voltage	1.5 V
Current consumption – typical	0.82 µA (Date Mechanism not in Gear)
Current consumption – maximum	1.35 µA (Date Mechanism not in Gear)

Watch production

Drawing Casing ring (standard, PDF)
Drawing Dial (stem 3h, calendar 3h, PDF)
Drawing Dial (stem 3h, calendar 3h, round, PDF)
Drawing Dial (stem 3h, calendar 6h, round, PDF)
Drawing Dial (stem 3h, calendar 6h, PDF)
Drawing Dial (stem 3h, calendar 4h, round, horizontal, PDF)
Drawing Dial (stem 3h, calendar 5h, PDF)
Drawing Dial (Stellwelle 3h, Datum 3h Verrou, PDF)
Drawing Hand fitting (hand height 0-5, PDF)
Drawing Hand fitting (hand height 6, PDF)
Drawing Stem

User's manual

User's manual (PDF)

Watch repairs

Technical instruction (PDF)