


Quartz Movements

计时功能

朗达 明星系列

型号 5051.C - 12□"



产品规格

指针式石英机芯

系列

型号

尺寸

版本 瑞士制造

电池寿命

标准针高

明星系列

5051.C

12□"

13 钻石 / 金色

54 月

2

特点

- 金属机芯，可修理
- 拉停把心省电功能：节省大概70%耗电
- 两个按掣简易操作
- 大日历可快调

功能

- 1/10 秒
- 30分钟 / 12小时计时小眼
- 中心大秒计时（1/1秒）
- 12小时计时小眼
- 积累及分段计时
- 计时
- 星期显示
- 大日历
- 小秒针

Quartz Movements

计时功能

朗达 明星系列

型号 5051.C - 12□”

技术规格

机芯直径	28.60 mm
内罩座位直径	28.00 mm
机芯厚度	4.40 mm
电池以上厚度	4.40 mm
机芯座位	0.60 mm
把中	1.90 mm
把心行程	0.90 mm
把心螺纹直径	0.90 mm
秒针运行扭力 - 一般情况下	6 μ Nm
分针运行扭力 - 一般情况下	300 μ Nm
计时大秒针运行扭力 - 一般情况下	7 μ Nm
运作温度	0 - 50 ° C
误差率	-10/ +20 秒/月
防磁度	18.8 Oe
防震度	NIHS 91-10




电池规格

电池类型	型号 395
电池寿命	54 月
电压	1.5 V
电耗 - 一般情况下	1.32 μ A (日历不在跳动当中)
电耗 - 上限	1.65 μ A (日历不在跳动当中)





Important: l'aiguillage peut varier selon le modèle
Wichtig: die Zeigerwerkhöhe kann bei verschiedenen Modellen unterschiedlich sein
Important: the hand height can vary between different models



Le cadran doit être tenu par la boîte
Das Zifferblatt muss durch die Schale gehalten werden
The dial must be hold by the case


La course du poussoir doit être limitée dans le poussoir lui-même. Sa position poussée doit être contrôlée.
Die Weglänge des Drückers ist im Drücker selbst zu begrenzen. In der gedrückten Stellung ist seine Position zu kontrollieren
The way of the pusher has to be limited in the pusher itself. Its position must be checked while pushed in.

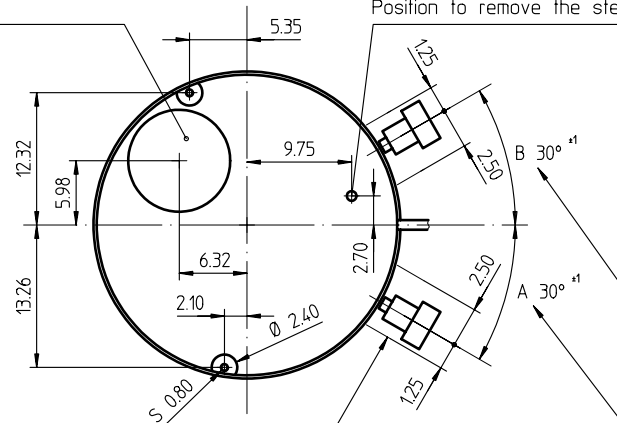


Dégagement cercle d'entourage
Freistellung Gehäusering
Opening movement holder

L'angle indiqué pour la direction du poussoir et la position doivent être respectés. Pour un angle de 0° des poussoirs A et B, voir plan 5000.345
Der angegebene Winkel für die Drückerrichtung und die Position müssen eingehalten werden. Für einen Drückerwinkel von 0° bei A und B, siehe Zeichnung 5000.345


The indicated angle of the pusher direction and the position must be fulfilled. For pusher angles of 0° (pusher A and B), see drawing 5000.345

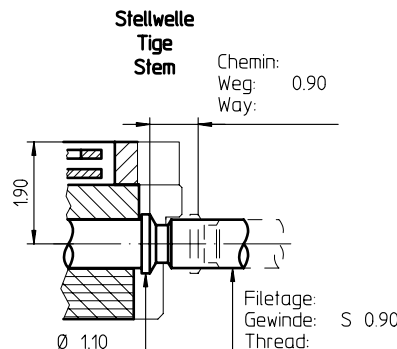


Vis
Schraube Nr. 4000.310
Screw



Vis
Schraube Nr. 4000.195
Screw





Vis
Schraube Nr. 4000.194
Screw


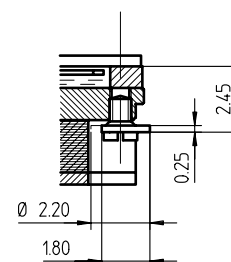


Cage Uhrwerkgestell Frame		Issued	14 Nov 2003	mk
		Modified	10.Dez 2007 ÄA 3696	bk
		Released	YES	
		Tolerance	+/- 20 µm	
		Scale	10 : 1 (5 : 1) (A3H)	
RONDA	5050.B, 5050.C, 5051.C	Sous réserve de modifications Aenderungen vorbehalten Modifications reserved		
		No.	5000.319	03



Angle Winkel Angle	30°
Ø Dp	b
1.00	13.50
1.10	13.50
1.20	13.50
1.30	13.50
1.40	13.50

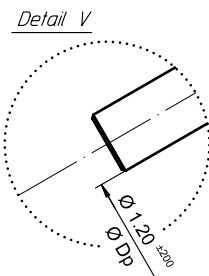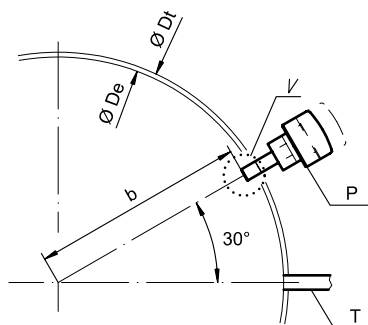



Angle Winkel Angle			20°
Ø Dp	a	b	
1.30	2.57	13.22	
1.40	2.59	13.21	

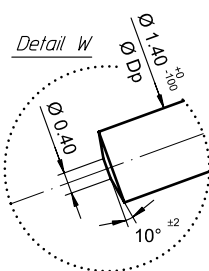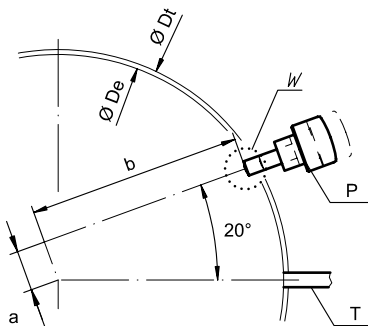



Angle Winkel Angle			15°
Ø Dp	a	b	
1.30	3.83	12.92	
1.40	3.86	12.91	

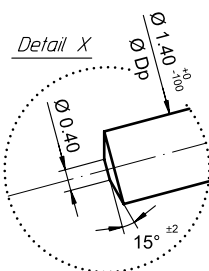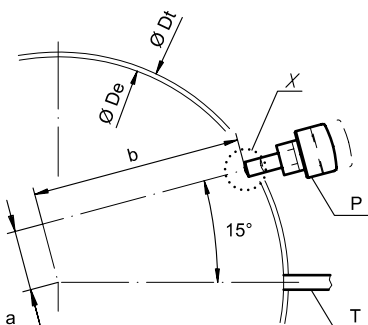

Angle Winkel Angle 10°		
Ø Dp	a	b
1.30	5.06	12.52
1.40	5.10	12.50

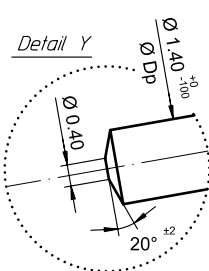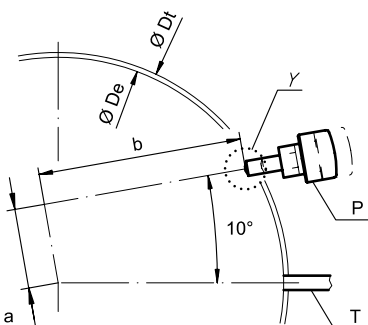

Angle Winkel Angle			0°
Ø Dp	a	b	
1.30	7.40	11.43	
1.40	7.45	11.40	

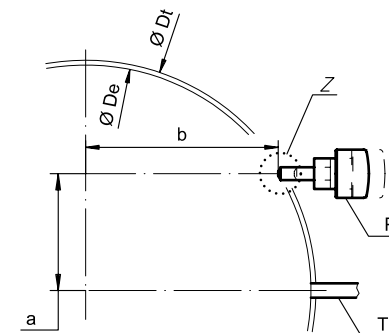

Ø De: diamètre d'encastage
Durchmesser der Gehäusepassung
fitting-diameter

Ø Dp: diamètre du poussoir
Drückerdurchmesser
pusher-diameter

Ø Dt: diamètre total
Totaldurchmesser
total-diameter

P: poussoir en position poussée
Drücker in gedrückter Stellung
pusher in pressed position


T: lige de mise à l'heure
Stellwelle
stem

Angle des poussoirs A et B
Winkel der Drücker A und B
Angle of pusher A and B

RONDA

4xxx.x, 5xxx.x

Issued	06 Sep 2004	mk
Modified	30.März 2005 ÄÄ 1784	mk
Released	YES	
Tolerance	+/- 20 µm	
Scale	10 : 1 (5 : 1) (A3H)	
Sous réserve de modifications Änderungen vorbehalten Modifications reserved		
No.	5000.345	01

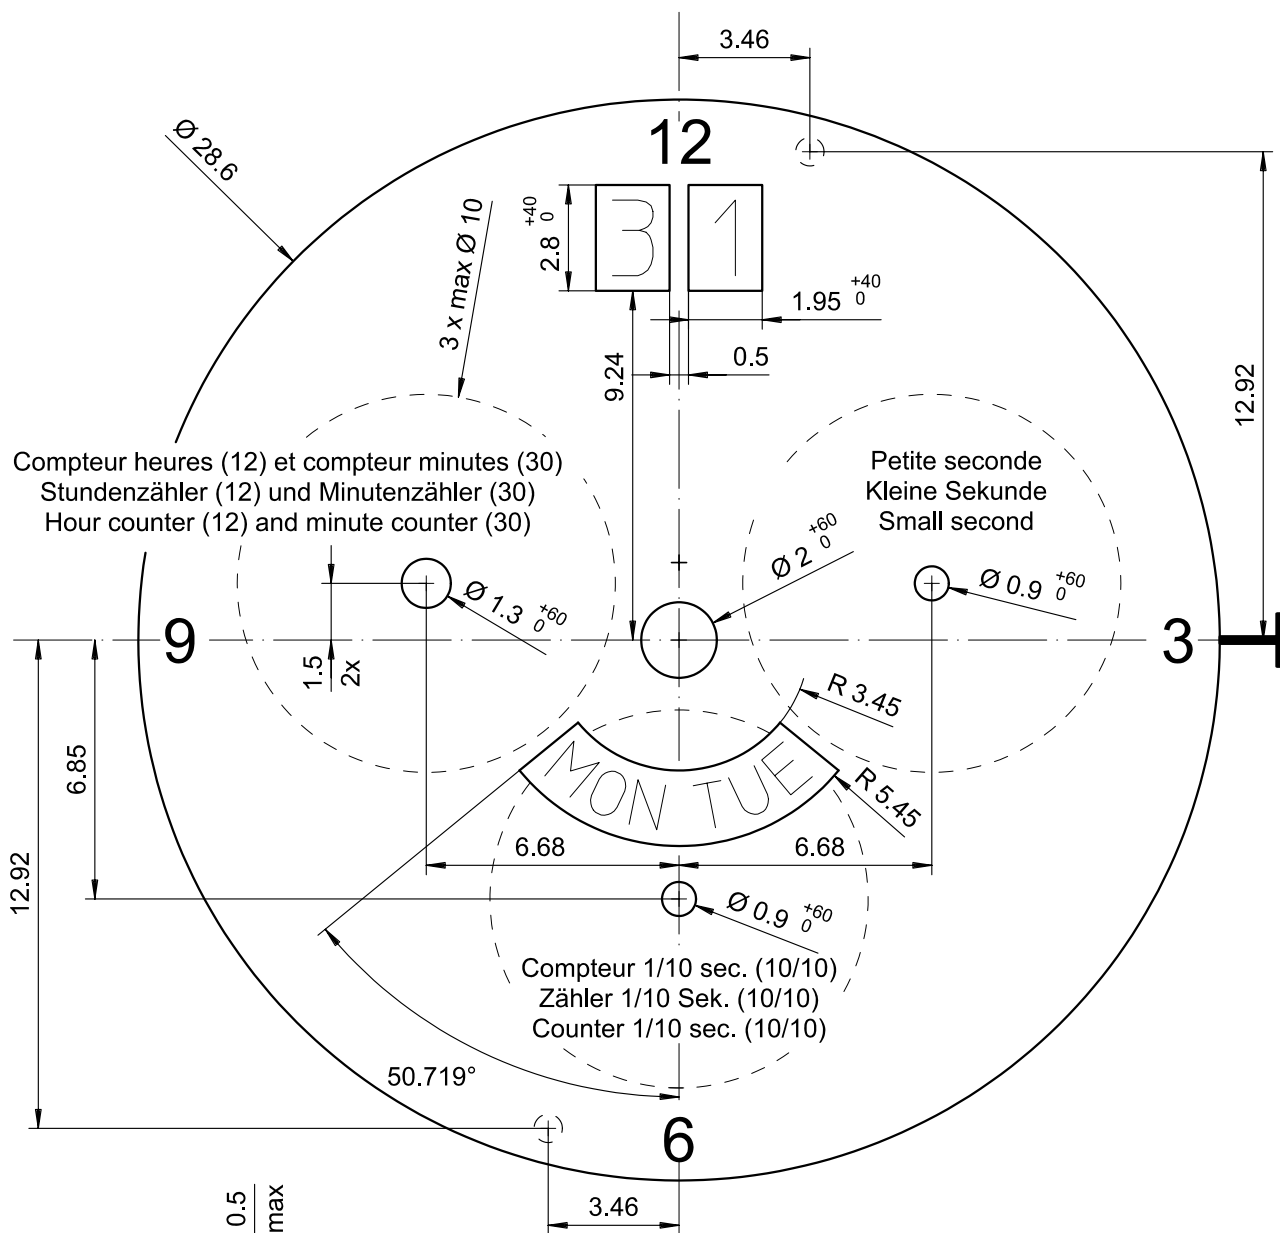

Epaisseur du cadran selon hauteur de l'aiguillage
Zifferblattdicke gemäss Zeigerwerkhöhen
Dial thickness according to hand fitting heights

Tige	Date	Jour
Stellw.	Datum	Tag
Stem	Date	Day
3H	12H	6H

Cadran
Zifferblatt
Dial

12 1/2"

Issued	30 Nov 2007	mK
Modified	10.Dez 2007 ÄA 3696	bk
Released	YES	
Tolerance	+/- 20 µm	
Scale	5 : 1 (A4V)	

RONDA

5051.C

Sous réserve de modifications
Änderungen vorbehalten
Modifications reserved

No.	5010.663	00
-----	----------	----



Tige de travail (intégrée dans le mouvement)
Arbeitsstellwelle (im Werk eingebaut)
Working stem (implemented in the movement)

No. d'article Artikelnummer Part number	L	L1	L2	L3	S	D
3000.177.CO	20.00	10.23	24.23	10.15	0.90	1.10




Couleur de la couronne Kronenfarbe Crown color	bleu foncé dunkelblau dark blue
Code	UN 5002

Tige (normale) / Stellwelle (normal) / Stem (normal)

No. d'article Artikelnummer Part number	L	L1	L2	L3	S	D
3000.177	20.00	10.23	24.23	10.15	0.90	1.10
3000.191	32.00	22.23	36.23	22.15	0.90	1.10



Couronne normale
Normale Krone
Normal crown

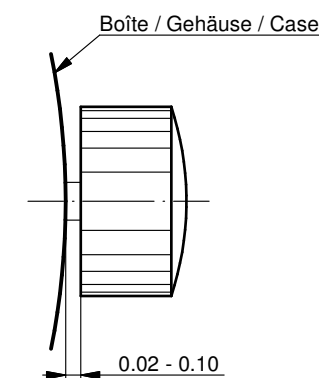


Couronne vissée
Geschraubte Krone
Screwed crown

Force ⇐ min. Kraft ⇐ min. Force ⇐ min.	10 N
Force ⇐ max. Kraft ⇐ max. Force ⇐ max.	15 N

Rallonge de tige / Stellwelle Verlängerung / Stem extension

No. d'article Artikelnummer Part number	L4	L5 (min)	L6	S1	S2	D1
3000.040	12.00	1.90	2.60	0.90	0.90	1.35

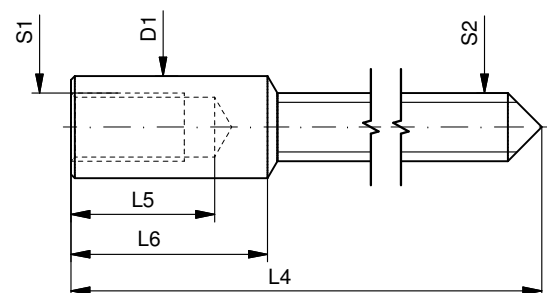

Tige (dimensions / forces)
Stellwelle (Dimensionen / Kräfte)
Stem (dimensions / forces)

RONDA

5010.B, 5020.B, 5021.D, 5030.D,
5040.B, 5040.D, 5040.E, 5040.F,
5050.B, 5050.C, 5051.C, 5130.B, 5130.D

Issued	05 Sep 2012	ds5222
Modified	17 Mär 2017 ÄÄ 34582	mg5224
Released	YES	
Tolerance	---	
Scale	10:1 (A3)	
Sous réserve de modifications Äenderungen vorbehalten Modifications reserved		
No.	5030.019	01



Movement holder
Removing setting stem
H5XXX.1T



Movement holder
Setting hands
H5XXX.1A

Fitting dial and hands

- Crown in position II
- Wind crown, until date 02 appears
- Crown in position III
- Wind hour hand forwards, until date changes to 03
- Remove working stem
- Fit dial
- Set 1/10 display hand on any number/index
- Point remaining hands towards 12 o'clock
- Wind hands forwards, until actual weekday and time are displayed
- Zero chronograph hand*
- Crown in position II
- Set date
- Crown in position I


Date switching duration

First and tenth digit discs
Weekday

~2hrs
~3½hrs

*Zeroing the Chronograph hand

- Activate pushers A and B for 2 seconds at the same time
(Chrono seconds hand rotates once)
- Pusher A → to correct chrono seconds hand
- Pusher B → to jump to hour hand
- Pusher A → to correct hand position
- Pusher B → to jump to minute hand
- Pusher A → to correct hand position

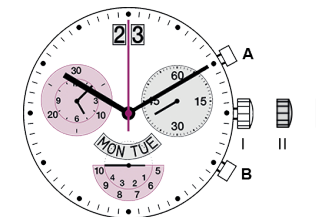

General Instructions

Removing the setting stem can only be effected in Pos. I.

The use of supporting screws is essential when mounting the hands.

Permitted hand setting strengths:

Hr / min. hands: <40N

Other hands: <30N

During quick date correction (setting stem in position II), a date switching speed of 5 d/s must not be exceeded.

Weekday setting tip

In order to avoid damage, the weekday disc should only be set with the setting stem in position III.

朗达 明星系列 - 机芯型号 5050.C&5051.C

中文使用手册

瑞士朗达是一个机芯供应商, 没有参与制造或分销成表。

若有任何手表相关之疑问, 如维修、保证期内投诉或手表功能问题, 请联络手表零售商、服务中心或制造商。所有联络资料可向您的销售员查询或参考保证文件。

显示和控制按钮描述

显示项目

5050.C

秒针
分针
星期
时针
分钟计
小时计
中心秒针
1/10 秒计
日期

控制按钮
按钮 A & B

把的


显示项目

5051.C

秒针
日期
分针
分钟计
小时计
中心秒针
1/10 秒计
星期

控制按钮
按钮 A & B

把的

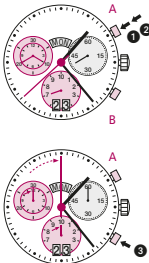


计时器(基本功能)

(开始 / 停止 / 还原)

例子:

- 开始: 按下按钮 A.
- 停止: 再按下按钮 A 停止计时, 然后阅读计时计:
4 小时 / 20 分 / 38 秒 / 70 秒
- 返回零位置:
按下按钮 B.
(计时指针会还原到零位置).

05

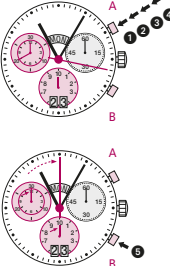


计时器:
计算累积时间

例子:

- 开始: (开始计时)
- 停止: (例子: 15 分 5 秒)
- 再开始: (继续计时)
- * 停止: (例子: 5 分 12 秒)
= 20 分 17 秒
(显示累积计算时间)
- 还原:
计时指针会还原到零位置.

注意:
* 步骤 ④ 后, 可再按下按钮 A 继续计算累积时间
(再开始 / 停止, 再开始 / 停止, ...)

06

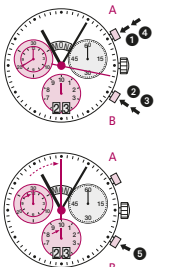


计时器:
计算分段时间

例子:

- 开始: (开始计时)
- 显示分段时间:
例子 20 分钟 17 秒 (指针停止, 计时器仍然在背 后运行)
- 追时:
(计时指针会迅速到达持续计算的时间).
- 停止: (显示最后的时间)
- 还原:
计时指针返回零位置

注意:
* 步骤 ④ 后, 可再按下按钮 B 继续计算分段时间
(显示分段时间 / 追时, ...)

07

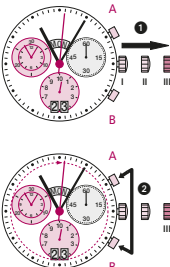


调较计时指针到零位置

例子:


当有计时指针不在零位置时, 便需要调较指针
(例如: 更换电池后).

- 把的拉至位置 III
(计时指针在 / 不在零位置).
- 同时持续按下按钮 A 及 B 最少 2 秒
(中心秒针会转动 360° → 修正模式启动).

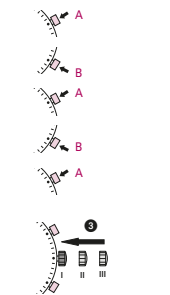

- ↓ 调较中心秒针
- 单步前进 1x 短按
连续前进 1x 长按
- ↓ 调较下一支指针
- 单步前进 1x 短按
连续前进 1x 长按
- ↓ 调较下一支指针
- 单步前进 1x 短按
连续前进 1x 长按
- ↓ 调较分钟计及小时计指针 (机械连接)
- 单步前进 1x 短按
连续前进 1x 长按
- ↓ 推把的回位置 I
- 结束调较计时指针 (能在任何时候执行).

08

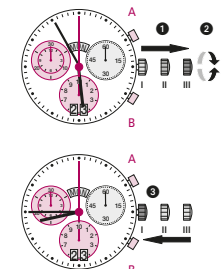


设定时间

- 把的拉至位置 III
(腕表停止运行).
- 转动把的至正确时间 8:45.

- * 推把的回位置 I

注意:
为了设定准确的秒数, ① 当秒针指向 „60“. 拉把的设定至小时及分钟后, ② 必须在正确的秒数将把的推回位置 I

02

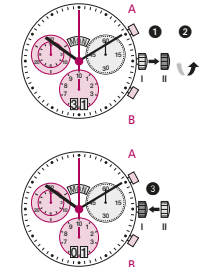


设定日期 (快速模式)

- 把的拉至位置 II (腕表 继续运行).
- 转动把的至正确日期 01.
- * 推把的回位置 I.

注意:
9 PM 至 12 PM 为日历转换时段, 若在这时段内设定日期, 必须比正确日期多转一天。
过快转换日期可能引致日期显示错误, 转换日期由 01 至 31 (把的位置 II) 可以使日期再次同步。

03

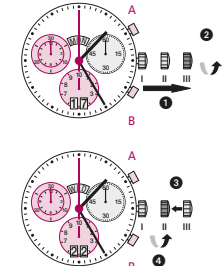

设定日期/星期/时间

例子:
- 腕表上的日期/时间 17 / 01:25 / 10
- 现在的日期/时间 23 / 20:30 / 10

- 把的拉至位置 III (腕表停止运行).
- 转动把的至昨日星期日 01
- 把的拉至位置 II
- 转动把的至昨日日期 22

- * 把的拉至位置 III (腕表停止运行).
- 继续转动把的至正确日期 23 及星期日 01
- ** 继续转动把的至正确时间 8:30 PM
- 将把的推回位置 I


注意:
* 为了设定至准确的秒数
请参阅附录 « 设定时间 ».
** 请注意腕表上的 AM/PM 模式

04




电池种类: 395 (直径 9.5 mm x 2.6 mm / SR 927 SW)
误差规格: +20 / -10 秒 (每月)





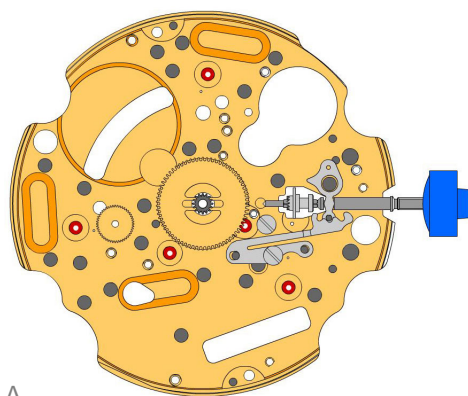



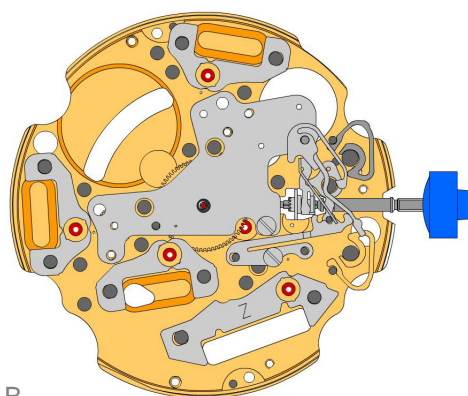














A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244 3.		Hour wheel (counter 24h)
2030.017.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250. Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h, chrono)
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)
4000.250 18.		Screw

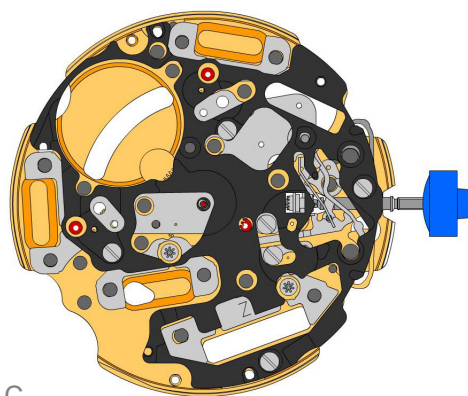


C

3603.079
19.  Plastic bracket
Plastic bracket held by 4 screws 4000.250.

4000.250
20.  Screw

3715.094.RK
21.  Rotor

3715.094.RK
22.  Rotor

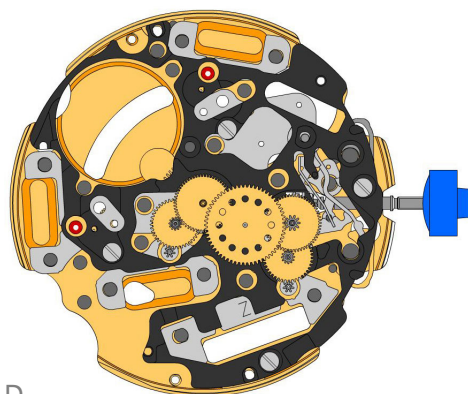


D


3147.046.CO
23.  Intermediate wheel

3136.142.CO
24.  Second wheel (long)


3147.047.CO
25.  Intermediate wheel (chrono)

3136.144.CO
26.  Chronograph wheel (Aig.2)

3122.056.CO
27.  Third wheel

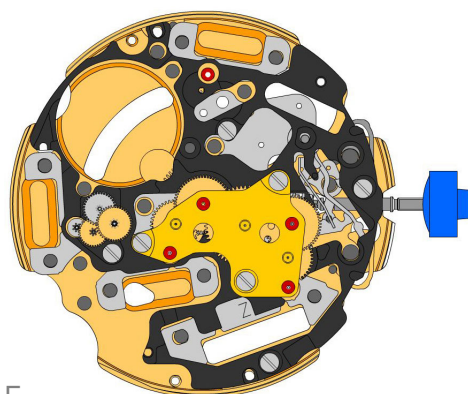

E


2020.148.G
28.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.


4000.250
29.  Screw

3715.095.RK
30.  Rotor






3147.048.CO
31.  Intermediate wheel (counter)

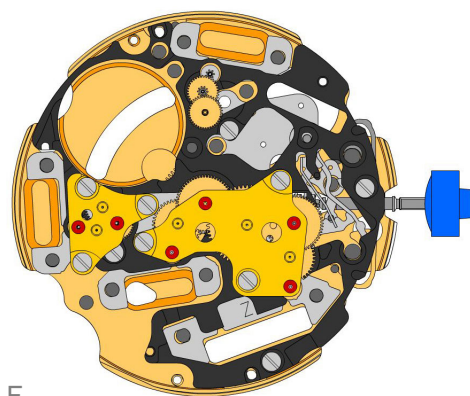
3007.056.CO
32.  Minute wheel (counter 24h)

3402.008.CO
33.  Minute counting wheel







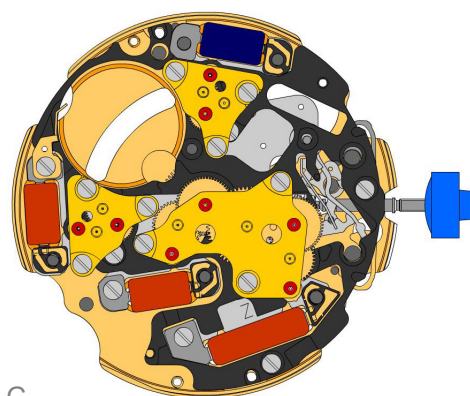


F

2020.149.G 34.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 35.		Screw
3715.095.RK 36.		Rotor
3147.053.CO 37.		Intermediate wheel (counter 1/10sec)
3402.009.CO 38.		Counting wheel 1/10 sec Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together.







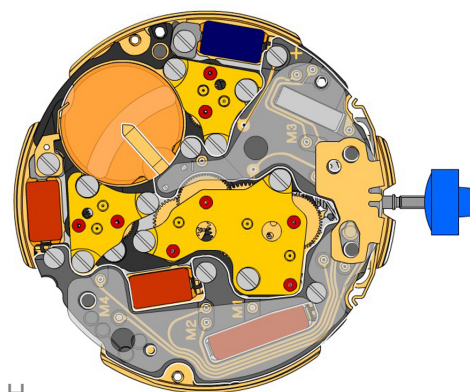



G


2020.149.G 39.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 40.		Screw
3621.053.RK 41.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 42.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 43.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.055.RK 44.		Coil (counter 6h) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.



H

4000.250 45.		Screw
3601.118 46.		Contact strip Contact strip held by 1 screw 4000.250.
4000.250 47.		Screw
3603.034 48.		Battery insulator

3612.144.5050 49.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 50.		Screw
3603.069 51.		Circuit insulator
3601.107.G 52.		Pusher contact spring

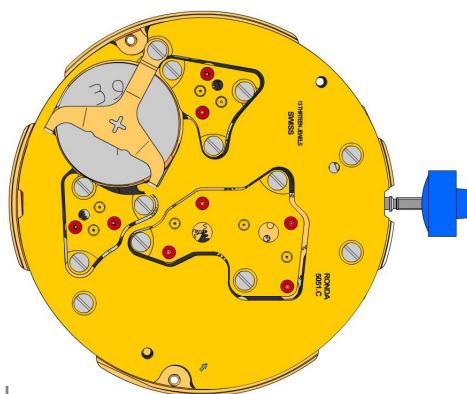


2130.137.G.M01.5051C
53.  **Electronic module cover**
Electronic module cover held by 3 screws 4000.250.





3600.010.HGF
54.  **Battery 395**


3601.109.G
55.  **Bridle +**
Bridle held by 1 screw 4000.250.

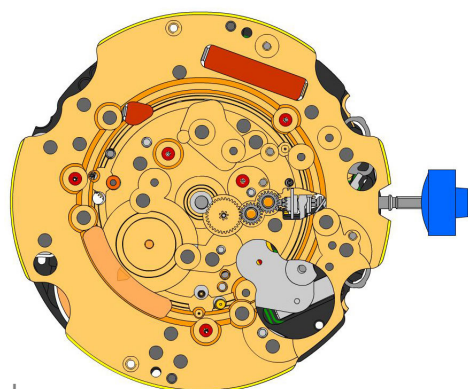4000.250
56.  **Screw**





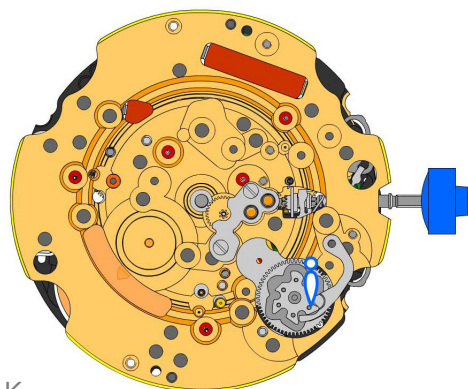


J

2000.574.G 57.		Main plate
3004.164 58.		Setting wheel
3004.164 59.		Setting wheel
3007.054.CO 60.		Minute wheel







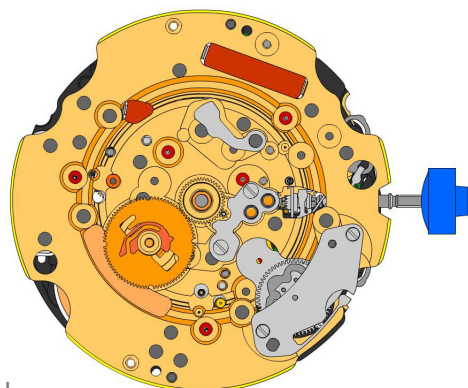


K

2130.143 61.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 62.		Screw
3004.223 63.		Tens indicator driving wheel Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.059 64.		Tens jumper Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together.



L

2130.142 65.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Place the spring loaded bracket outside of the tens jumper.
4010.306 66.		Screw
3301.242 67.		Hour wheel (Aig.2)
3315.016 68.		Friction spring
3004.224.CO 69.		Date indicator driving wheel
3500.049 70.		Date jumper

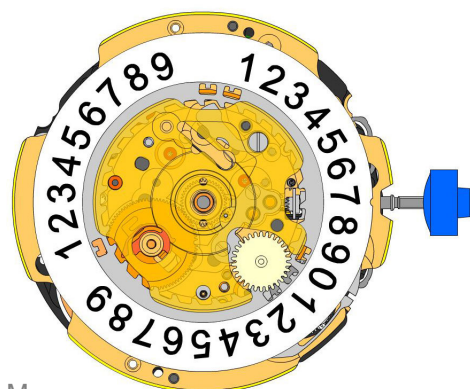

M

3504.214.AF.1.A
71.



Units indicator (standard)
Nick of the indicator at 3 o'clock.

3147.054
72.



Tens intermediate wheel

2130.163
73.



Date indicator maintaining plate
Date indicator maintaining plate held by 1 screw 4000.282.

4000.282
74.




Screw

3905.070
75.



Date jumper spring
Insert the date jumper spring in the provided opening.

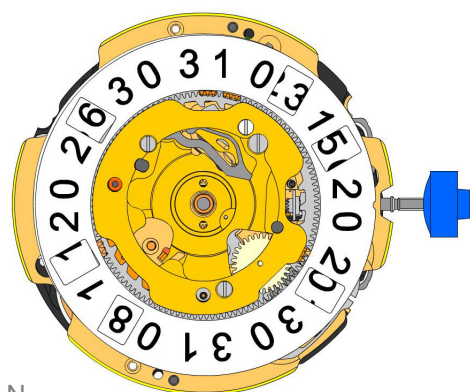

N

3504.216.AF.1.A
76.



Tens indicator (standard)
Nick of the indicator at 3 o'clock.

3500.055
77.



Day jumper
Tensioning the spring arm.

3004.175
78.



Day finger

2130.162.G
79.




Date mechanism maintaining plate
Date mechanism maintaining plate held by 2 screws 4000.312 and 1 screw 4000.300.

4000.312
80.



Screw

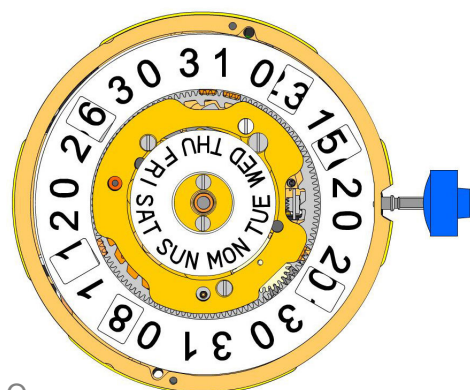

O

3508.155.AQ.E.A
81.



Day indicator (standard)

2130.164.G
82.



Day indicator maintaining plate
Day indicator maintaining plate held by 2 screws 4000.311.

4000.311
83.







Screw

3506.072.G
84.




Dial support

8200 85.		Moebius 8200
9014 86.		Moebius 9014
124 87.		Jismaa 124
9020 88.		Moebius 9020




Battery	395
Voltage	1.55 V

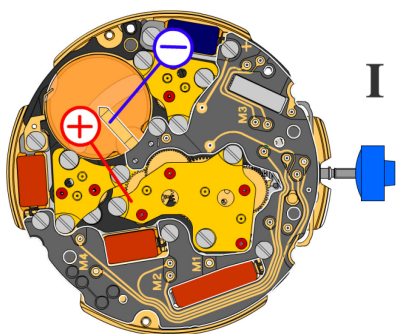


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.32 μA
Maximal consumption	1.65 μA
Rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

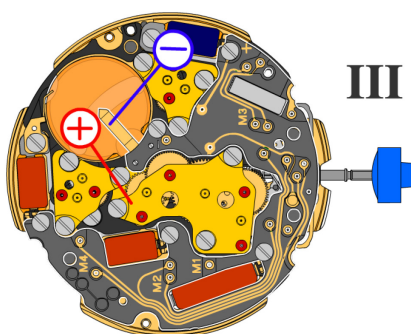



Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

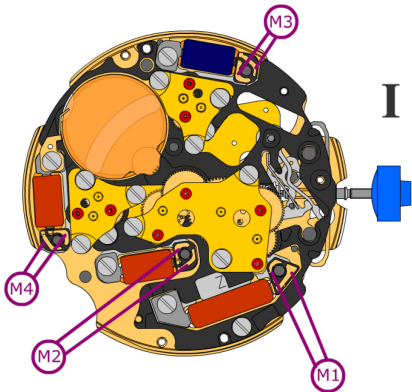

Coil resistance M1 **1.90 k Ω .. 2.10 k Ω**

Coil resistance M2 **1.68 k Ω .. 1.88 k Ω**


Coil resistance M3 **1.68 k Ω .. 1.88 k Ω**

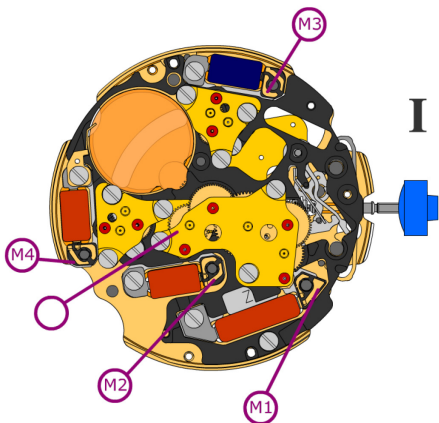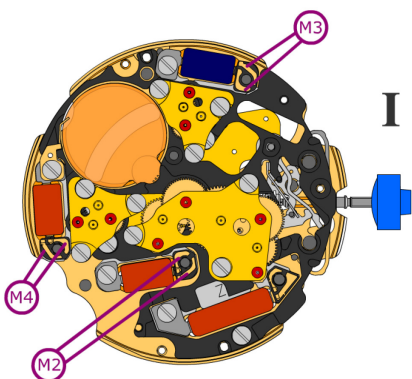Coil resistance M4 **1.68 k Ω .. 1.88 k Ω**

Coil isolation M1/M2/M3/M4 **∞ k Ω**

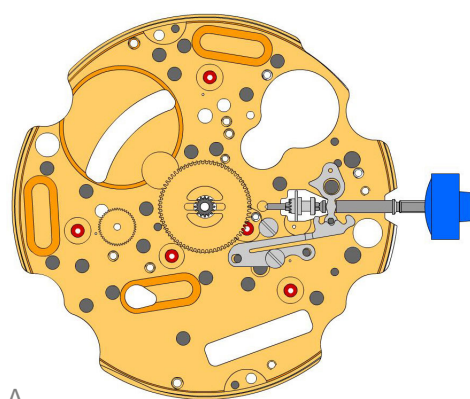Signal generator (4.9 ms, 8 Hz):




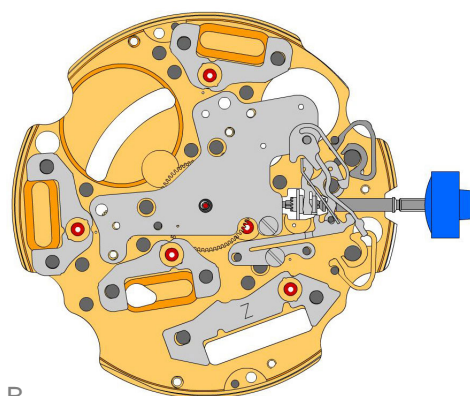













Lower working voltage limit
M2/M3/M4 **1.20 V**




A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244 3.		Hour wheel (counter 24h)
2030.032.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h, chrono)
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)
4000.250 18.		Screw

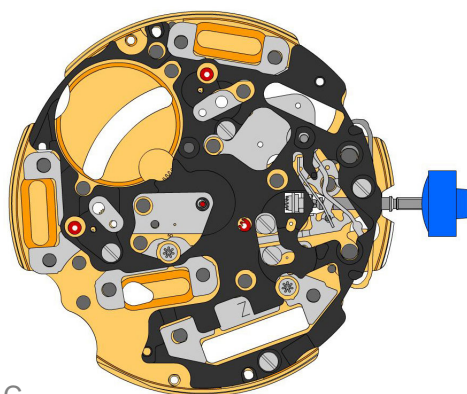


C

3603.079
19.  Plastic bracket
Plastic bracket held by 4 screws 4000.250.

4000.250
20.  Screw

3715.094.RK
21.  Rotor

3715.094.RK
22.  Rotor

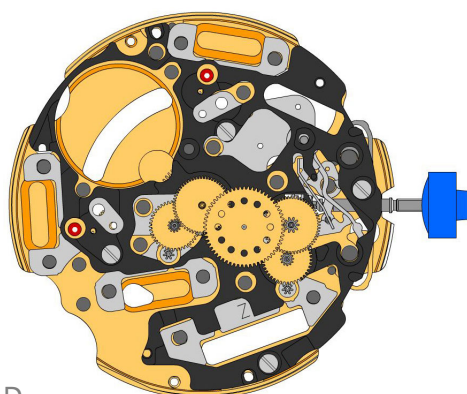

D


3147.046.CO
23.  Intermediate wheel

3136.142.CO
24.  Second wheel (long)


3147.047.CO
25.  Intermediate wheel (chrono)

3136.144.CO
26.  Chronograph wheel (Aig.2)

3122.056.CO
27.  Third wheel

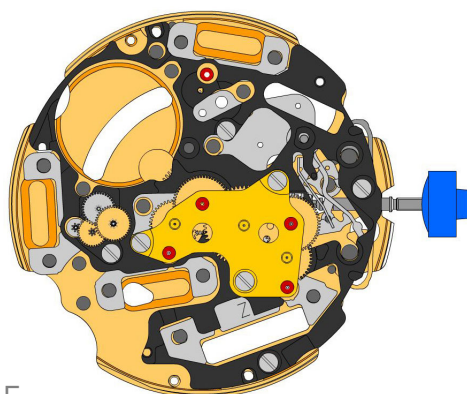

E

2020.148.G
28.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.


4000.250
29.  Screw

3715.095.RK
30.  Rotor






3147.048.CO
31.  Intermediate wheel (counter)

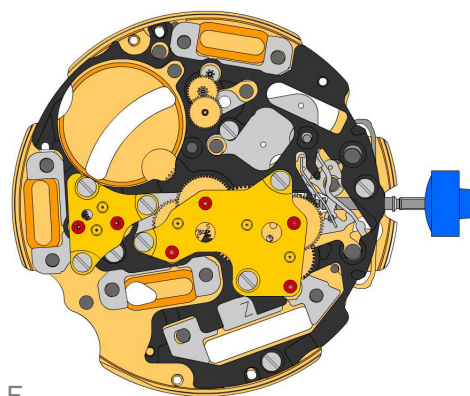
3007.056.CO
32.  Minute wheel (counter 24h)

3402.008.CO
33.  Minute counting wheel







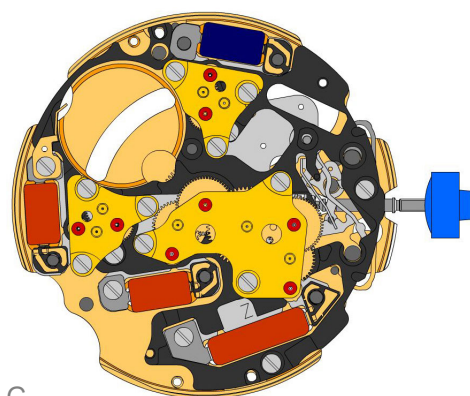


F

2020.149.G 34.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 35.		Screw
3715.095.RK 36.		Rotor
3147.053.CO 37.		Intermediate wheel (counter 1/10sec)
3402.016.CO 38.		Counting wheel 1/10 sec





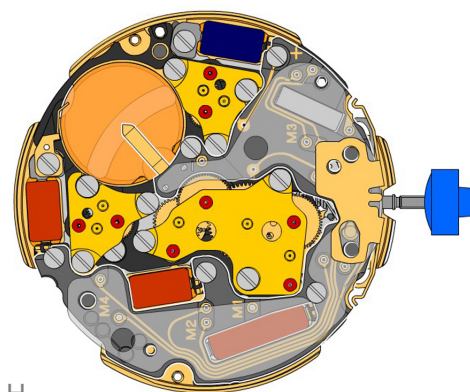


G

2020.149.G 39.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 40.		Screw
3621.053.RK 41.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 42.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 43.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.055.RK 44.		Coil (counter 6h) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.



H

3612.144.5050 49.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 50.		Screw
3603.069 51.		Circuit insulator
3601.107.G 52.		Pusher contact spring

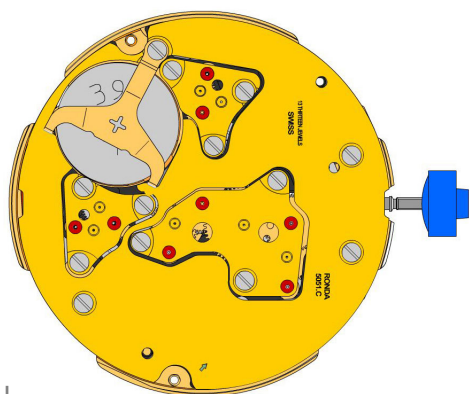

2130.137.G.M01.5051C
53.



Electronic module cover
Electronic module cover held by 3 screws 4000.250.

3600.010.HGF
54.



Battery 395

3601.109.G
55.




Bridge +
Bridge held by 1 screw 4000.250.





4000.250
56.

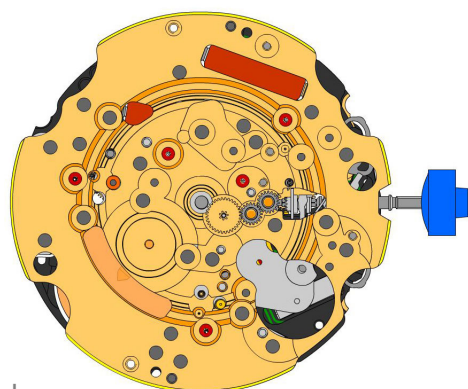


Screw





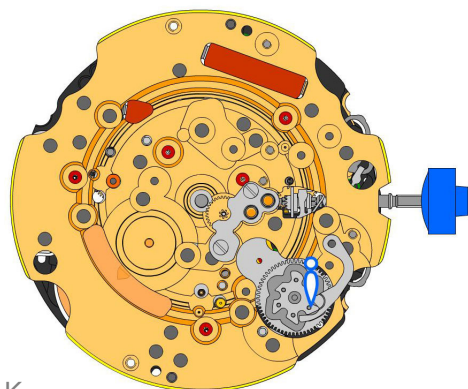


J

2000.574.G 57.		Main plate
3004.164 58.		Setting wheel
3004.164 59.		Setting wheel
3007.054.CO 60.		Minute wheel







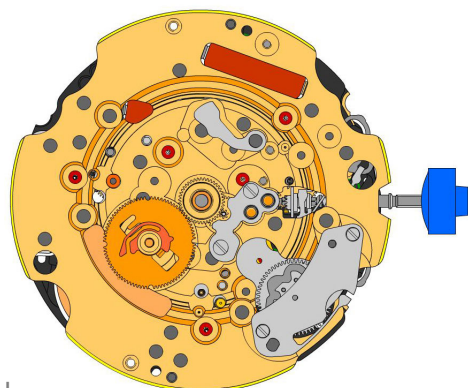


K

2130.143 61.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 62.		Screw
3004.227 63.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 64.		Tens jumper



L

2130.142 65.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Place the spring loaded bracket outside of the tens jumper.
4010.306 66.		Screw
3301.242 67.		Hour wheel (Aig.2)
3315.016 68.		Friction spring
3004.224.CO 69.		Date indicator driving wheel
3500.049 70.		Date jumper

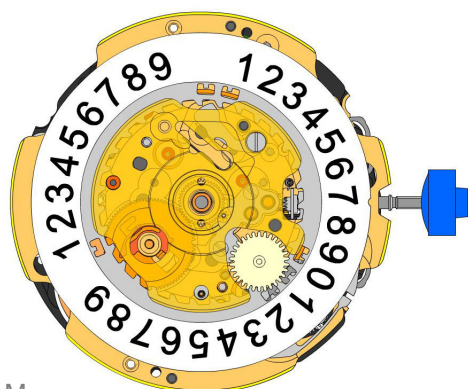

M

3504.214.AF.1.A
71. Units indicator (standard)
Nick of the indicator at 3 o'clock.



3147.054
72. Tens intermediate wheel




2130.163
73. Date indicator maintaining plate
Date indicator maintaining plate held by 1 screw 4000.282.



4000.282
74. Screw



3905.070
75. Date jumper spring
Insert the date jumper spring in the provided opening.

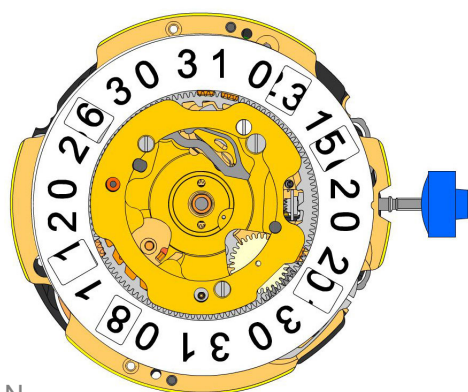

N

3504.216.AF.1.A
76. Tens indicator (standard)
Nick of the indicator at 3 o'clock.



3500.055
77. Day jumper




3004.175
78. Day finger



2130.162.G
79. Date mechanism maintaining plate
Date mechanism maintaining plate held by 2 screws 4000.312 and 1 screw 4000.300.



4000.312
80. Screw

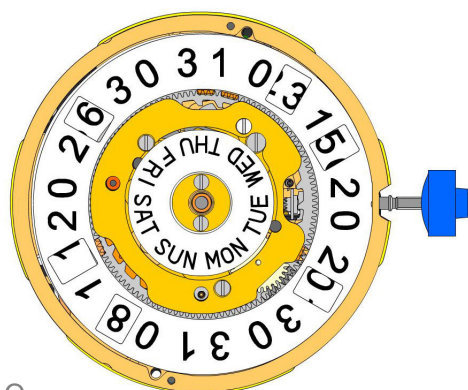

O

3508.155.AQ.E.A
81. Day indicator (standard)



2130.164.G
82. Day indicator maintaining plate
Day indicator maintaining plate held by 2 screws 4000.311.








4000.311
83. Screw




3506.072.G
84. Dial support



8200 85.		Moebius 8200
9014 86.		Moebius 9014
124 87.		Jismaa 124
9020 88.		Moebius 9020

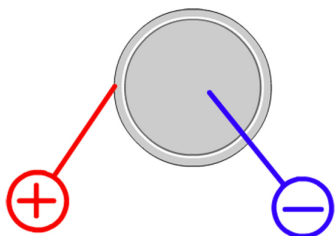


Battery	395
Voltage	1.55 V

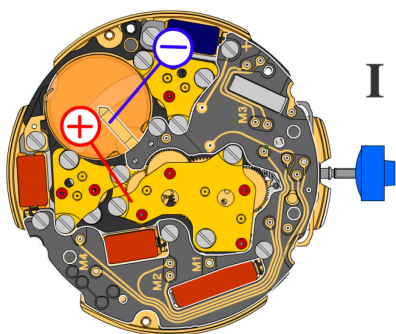


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.32 μA
Maximal consumption	1.65 μA
Rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.20 V

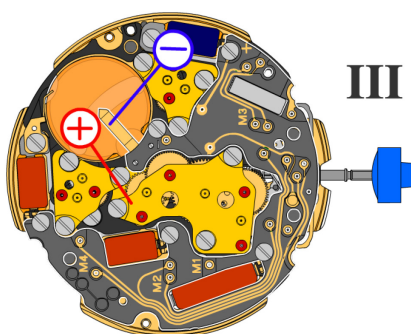



Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

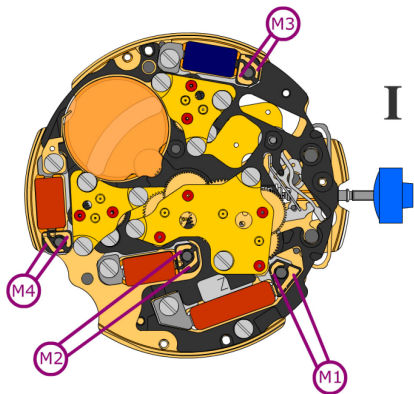
Coil resistance M1 **1.90 k Ω .. 2.10 k Ω**

Coil resistance M2 **1.68 k Ω .. 1.88 k Ω**

Coil resistance M3 **1.68 k Ω .. 1.88 k Ω**

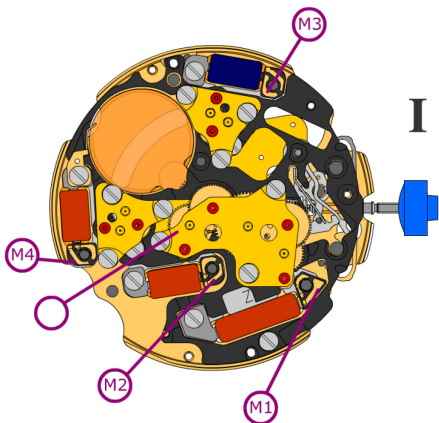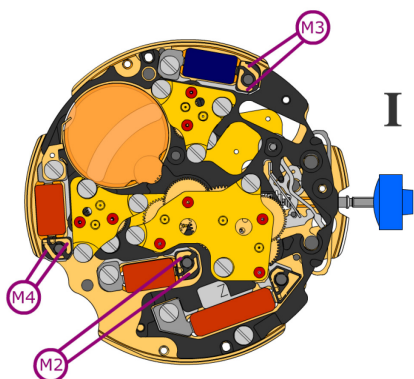Coil resistance M4 **1.68 k Ω .. 1.88 k Ω**

Coil isolation M1/M2/M3/M4 **∞ k Ω**

Signal generator (4.9 ms, 8 Hz):

Lower working voltage limit
M2/M3/M4 **1.20 V**