






- | | | | |
|---|---|----------|--------------------------|
| 1 |  | 2000.709 | Main plate |
| 2 |  | 3016.034 | Stop lever |
| 3 |  | 3603.098 | Electronic modul support |
| 4 |  | 4000.248 | Screw |
| 5 |  | 4000.343 | Screw |


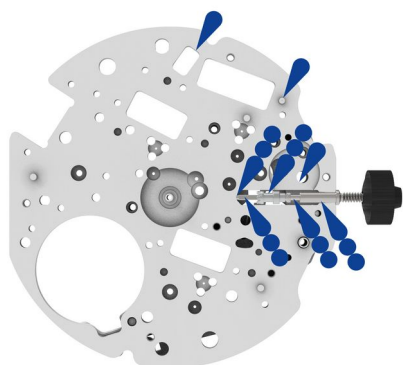



- | | | | |
|---|---|-------------|-----------------------------|
| 6 |  | 3001.072.FI | Sliding pinion |
| 7 |  | 3000.208.CO | Working stem (dual) |
| 8 |  | 8200 / 9020 | Moebius 8200 / Moebius 9020 |

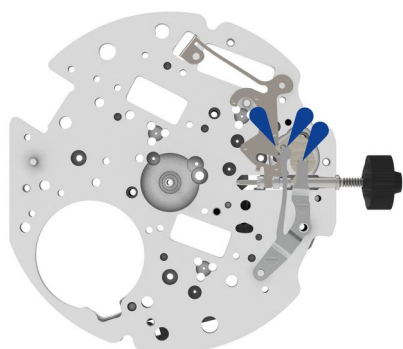




- | | | | |
|----|---|-------------|----------------------|
| 9 |  | 3015.095 | Yoke |
| 10 |  | 3017.064.CO | Setting lever |
| 11 |  | 3905.083 | Setting lever jumper |
| 12 |  | 4000.342 | Screw |
| 13 |  | 4000.342 | Screw |
| 14 |  | 8200 | Moebius 8200 |

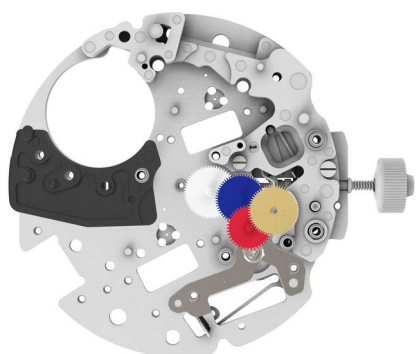


15		3603.099	Battery support
16		3622.070	Stator
17		3715.132.RK	Rotor
18		3122.072	Third wheel
19		3136.214	Second wheel (Aig.)
20		3147.089	Intermediate wheel
21		3136.216.CO	Small second wheel (Aig.)

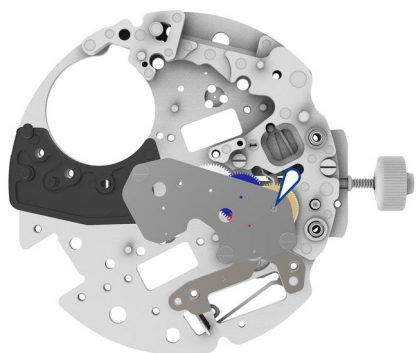

22		2020.210.M01.X20	Train wheel bridge
23		4000.248	Screw
24		4000.248	Screw
25		4000.248	Screw
26		9014	Moebius 9014

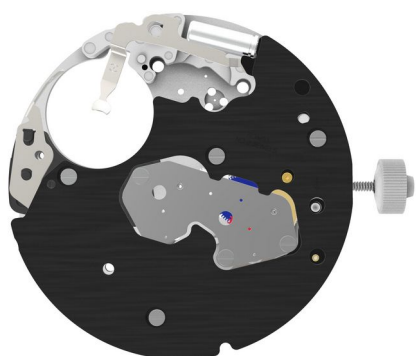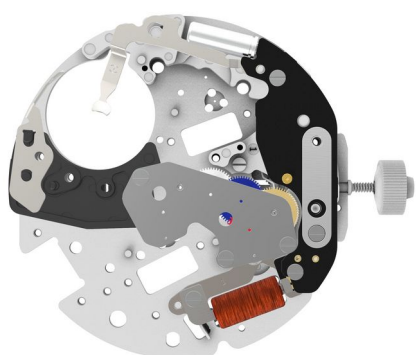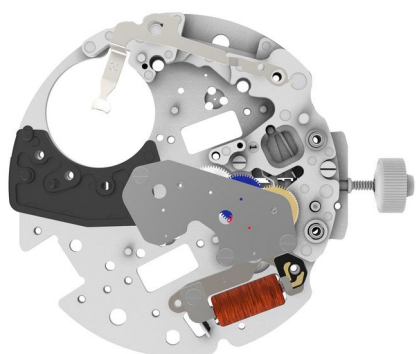

27		3601.153	Bridle -
28		3621.078.RK	Coil
Attention: Please hold the coil only on the grey coil core.			
29		4000.248	Screw
30		3612.236.RK	Electronic module
31	 1:2	4000.341	Screw
32	 1:2	4000.341	Screw
33		4000.248	Screw
34		2130.233	Setting mechanism cover
35		3601.154	Lateral bridle
36		2130.230	Electronic module cover
37		4000.248	Screw
38	 1:2	4000.341	Screw
39	 1:2	4000.341	Screw
40	 1:2	4000.341	Screw

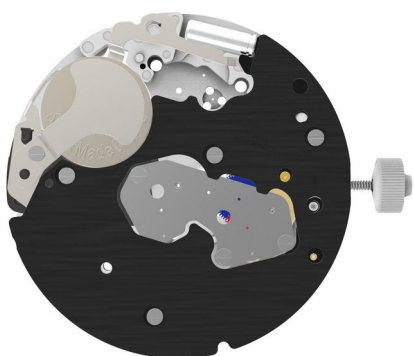


41  3600.010.HGF Battery 395 (Ø 9.50 x 2.70)

42  3601.152 Bridle +


43  4000.341 Screw


1:2


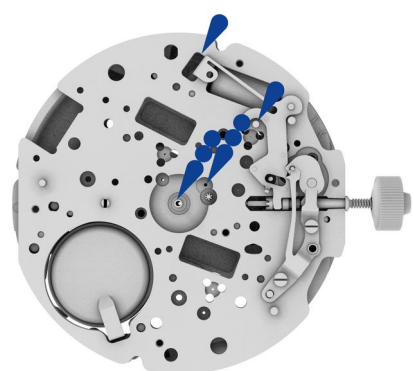


44  8200 / 9020 Moebius 8200 / Moebius 9020

45  9020 Moebius 9020



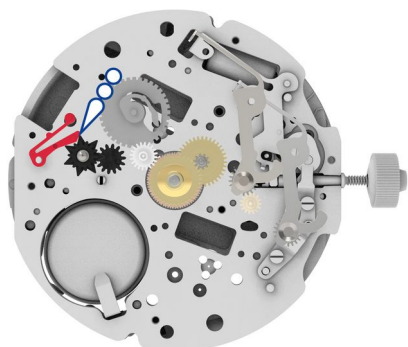


46		3015.096.CO	Setting lever yoke
47		3004.245	Date setting wheel
48		3015.096.CO	Setting lever yoke
49		3305.371.CO	Cannon pinion (Aig.)
50		3007.092.CO	Minute wheel
51		3301.332.TA	Hour wheel (Aig.)
52		3315.003	Friction spring
53		3004.264	Date indicator driving wheel
54		3147.091	Intermediate date wheel
55		3004.247	Days driving wheel
56		3401.087.CO	Day wheel
57		3500.082	Day jumper
58		I-4	Moebius I-4



59		2130.231	Setting mechanism cover
60		4000.248	Screw
61		4000.248	Screw
62		4000.248	Screw
63		4000.248	Screw




64		3504.243.AP.3.A	Datumanzeiger (T3/G6)
65		3507.067	Date corrector
66		3500.081	Date jumper
67		3905.084	Date jumper spring

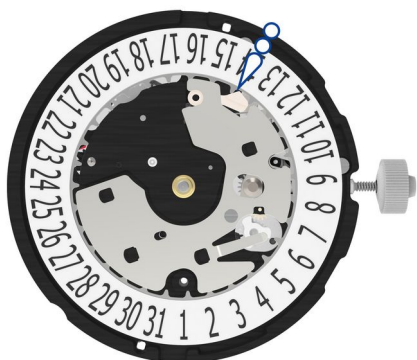


68		2130.229	Date mechanism maintaining plate
69		4000.343	Screw
70		I-4	Moebius I-4


Measurement

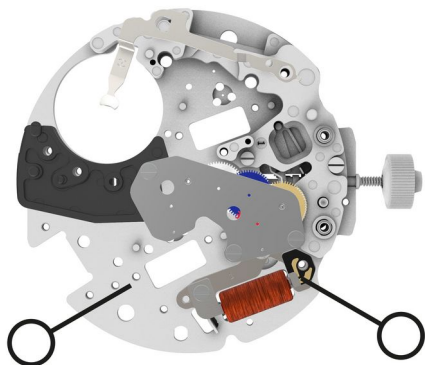

Coil insulation
infinite

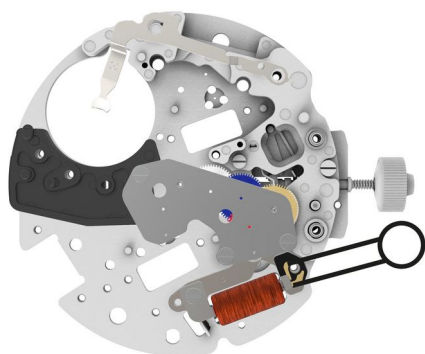


Coil resistance movement
(min./max.) 1500 - 1700 Ohm

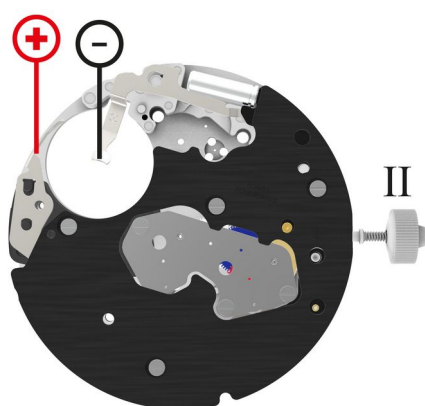

Setting stem in position III, 60 s measuring interval.
(typ./max.) 0.10 / 0.30 μ A

Lower working voltage limit
<1.20 V

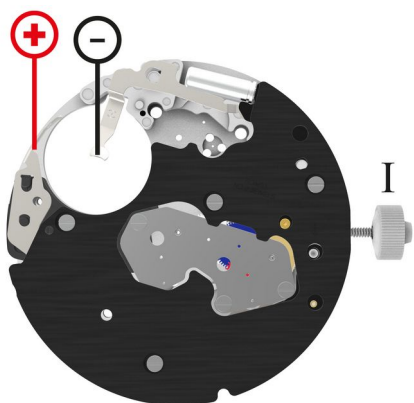


Setting stem in position I, calendar not in gear, 60s measuring interval.

(typ./max.) 1.42 / 3.00 μ A

Lower working voltage limit
<1.20 V

60s measuring interval
-10 .. +20s/mth

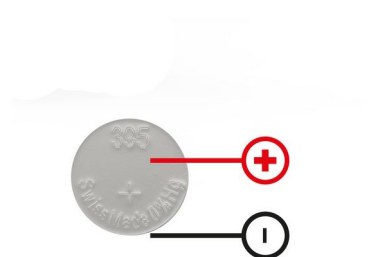

Voltage
typ. 1.5 V