


Caliber 1064 – 6¾ x 8'''

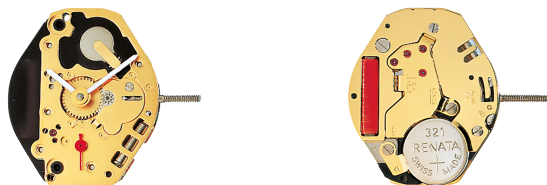

Product Specifications

Analog quartz movement

Line	slimtech
Caliber	1064
Size	6¾ x 8'''
Version Swiss Made	6 Jewels / gold plated EOL
Version Swiss Parts	2 Jewels / nickel plated
Standard battery life	25 months
High battery life	34 months
Standard hand fitting height	1

Functions

- Small second
- 2 hands

Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem:
Reduction of consumption approximately 70%
- Complete interchangeability between 1062-1064
- Remote sweep second for ladies - at 4.8 mm from the center

Quartz Movements

Classic Functions

RONDA slimtech

Caliber 1064 – 6¾ x 8"

Technical Specifications

Diameter Total	15.30 mm
Case fitting	15.30 mm
Movement height	1.90 mm
Height over standard battery	1.95 mm
Height over high battery	2.55 mm
Movement rest	0.40 mm
Height over stem	0.75 mm
Length of stem travel	0.35 mm
Stem thread	0.90 mm
Useful torque second – typical	5 µNm
Useful torque minute – typical	250 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Battery Specifications

Standard battery	No. 321
High battery	No. 364
Standard battery life	25 months
High battery life	34 months
Battery voltage	1.5 V
Current consumption – typical	0.82 µA
Current consumption – maximum	1.15 µA

Watch production

Drawing Casing ring (standard, PDF)
 Drawing Casing ring (high battery, PDF)
 Drawing Dial (stem 3h, PDF)
 Drawing Hand fitting (hand height 1-2, PDF)
 Drawing Stem

Watch repairs

Technical instruction (PDF)