


## Caliber 1069 – 6¾ x 8'''

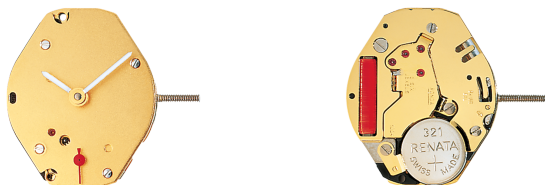

### Product Specifications

Analog quartz movement

Line	slimtech
Caliber	1069
Size	6¾ x 8'''
Version Swiss Made	6 Jewels / gold plated EOL
Version Swiss Parts	2 Jewels / nickel plated
Standard battery life	25 months
High battery life	34 months
Standard hand fitting height	1

### Functions

- Small second
- 2 hands

### Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem:  
Reduction of consumption approximately 70%
- Remote sweep second for men - at 6.3 mm from the center

## Caliber 1069 – 6¾ x 8"

### Technical Specifications

Diameter Total	15.30 mm
Case fitting	15.30 mm
Movement height	2.30 mm
Height over standard battery	2.35 mm
Height over high battery	3.00 mm
Movement rest	0.40 mm
Height over stem	1.15 mm
Length of stem travel	0.35 mm
Stem thread	0.90 mm
Useful torque second – typical	5 µNm
Useful torque minute – typical	250 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

### Battery Specifications

Standard battery	No. 321
High battery	No. 364
Standard battery life	25 months
High battery life	34 months
Battery voltage	1.5 V
Current consumption – typical	0.82 µA
Current consumption – maximum	1.15 µA

### Watch production

Drawing Casing ring (standard, PDF)  
Drawing Casing ring (high battery, PDF)  
Drawing Dial (stem 3h, PDF)  
Drawing Hand fitting (hand height 0-2, PDF)  
Drawing Stem

### Watch repairs

Technical instruction (PDF)