


Caliber 762 – 6¾ x 8'''

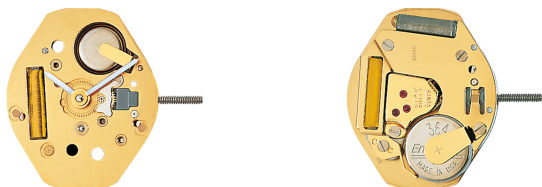

Product Specifications

Analog quartz movement

Line normtech

Caliber 762

Size 6¾ x 8'''

Version Swiss Made 4 Jewels / gold plated

Standard battery life 10 Years

Standard hand fitting height 1

Features

- Very long battery life
- Repairable metal watch movement
- Power saving mechanism with pulled out stem:
Reduction of consumption approximately 70%
- Many high hand heights available

Functions

- 2 hands

Caliber 762 – 6¾ x 8"

Technical Specifications

Diameter Total	15.30 mm
Case fitting	15.30 mm
Movement height	2.50 mm
Height over standard battery	2.65 mm
Movement rest	0.40 mm
Height over stem	1.00 mm
Length of stem travel	0.40 mm
Stem thread	0.90 mm
Useful torque minute – typical	30 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Battery Specifications

Standard battery	No. 364
Standard battery life	10 Years
Battery voltage	1.5 V
Current consumption – typical	0.23 µA
Current consumption – maximum	0.3 µA

Watch production

Drawing Casing ring (standard, PDF)
Drawing Dial (stem 3h, PDF)
Drawing Hand fitting (hand height 0-5, PDF)
Drawing Stem

Watch repairs

Technical instruction (PDF)