


## Caliber 772 – 7<sup>3</sup>/<sub>4</sub>"

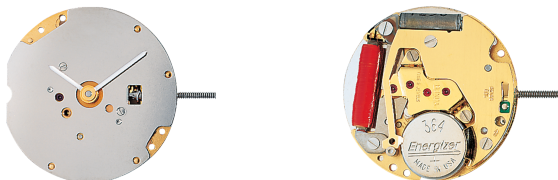

### Product Specifications

Analog quartz movement

Line	normtech
Caliber	772
Size	7 <sup>3</sup> / <sub>4</sub> "
Version Swiss Made	5 Jewels / gold plated
Version Swiss Parts	1 Jewels / nickel plated
Standard battery life	34 months
Standard hand fitting height	1

### Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem:  
Reduction of consumption approximately 70%
- Many high hand heights available

### Functions

- 2 hands

## Caliber 772 – 7<sup>3</sup>/<sub>4</sub>"

### Technical Specifications

Diameter Total	17.50 mm
Case fitting	17.20 mm
Movement height	2.50 mm
Height over standard battery	2.75 mm
Movement rest	0.30 mm
Height over stem	1.00 mm
Length of stem travel	0.80 mm
Stem thread	0.90 mm
Useful torque minute – typical	350 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

### Battery Specifications

Standard battery	No. 364
Standard battery life	34 months
Battery voltage	1.5 V
Current consumption – typical	0.83 µA
Current consumption – maximum	1.35 µA

### Watch production

Drawing Casing ring (standard, PDF)  
Drawing Dial (stem 3h, PDF)  
Drawing Hand fitting (hand height 0-3, 6, PDF)  
Drawing Stem

### Watch repairs

Technical instruction (PDF)